

CONTOUR



— EST 1967 —

FACINGS

OF AMERICA

Contour

1-3/4" x 3-3/4" Flat

1 sheet = 0.93 sq.ft. / 16.74 sq.ft. per box

1-3/4" x 3-3/4" Beveled

1 sheet = 0.93 sq.ft. / 13.95 sq.ft. per box

Flat



CON-2F
Matte White



CON-3F
Charcoal



CON-6F
Lace

Beveled



CON-1B
Glossy White



CON-2B
Matte White



CON-3B
Charcoal



CON-5B
Moss

Note Wide shade variation inherent in this series.


Please note that mesh mounted product sheets should NEVER be placed directly on the wet saw for cutting.

If cuts are required, pieces should be removed from the mesh and cut individually to avoid the glue releasing from the mesh, prior to completion of installation. The sheets should also NOT be exposed to moisture prior to installation.



CONTOUR

1 3/4" X 3 3/4" FLAT
1 3/4" X 3 3/4" BEVELED
3" HEXAGON

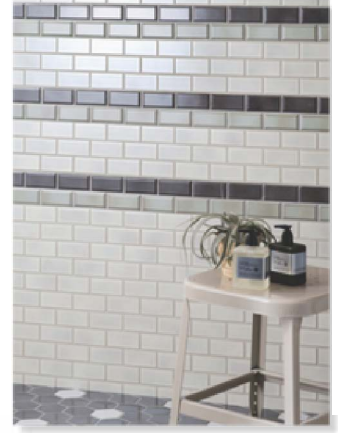

Contour is your one-stop shop for classic shapes and timeless colors. With bold bevels, sleek subways and homey hexagons, the Contour series has something for everyone.

Coordinating Trim: Jolly Piece 9/16" x 6" Bead | Jolly Piece 1/2" x 6" Surface Bullnose
Jolly pieces are coordinating trims that are fired at different times than the field tile. In this regard, there can be wide shade variations between the field and trim pieces.

RECOMMENDED AREAS OF USE

With regard to the durability of the bisque and glaze, this material is suitable for:

- All countertop applications - residential and commercial (Flat and Hexagon only)
- Fireplace hearth (Flat and Hexagon only)
- Fireplace surround and firebox
- Light commercial flooring applications and all residential flooring applications (Flat and Hexagon only)
- All interior wall applications - residential and commercial
- All exterior wall applications - residential and commercial including building facades, swimming pools, fountains, outdoor kitchens and regions that experience extreme weather conditions, subject to the method of installation

INSTALLATION METHOD

- Please refer to the TCNA handbook for installation method: <http://www.tcnatile.com/>
- Always inspect material prior to installation, for color, shade, size, mounting and any other deciding factors as installed material cannot be accepted for return or credit. Use signifies acceptance.
- Please note that mesh mounted goods should never be placed directly on the wet saw for cutting. If cuts are required, pieces should be removed from the mesh and cut individually to avoid the glue releasing from mesh.
- Material can be cleaned with any mild nonabrasive household cleaning product due to the chemical resistant nature of the glaze.

TECHNICAL DATA

- Japanese Porcelain - fired at approx. 2300° Fahrenheit
- Chemical Resistant
- VOC Free
- Frost Proof - *subject to method of installation*
- Water absorbency
 - Bisque less than 1%
 - Glazed surface 0%
- TCNA - MOH's Scale Rating 7
- TCNA - DCOF Average Ratings:
 - CON-1H/F: 0.21
 - CON-2H/F: 0.24
 - CON-6H/F: 0.34
- Pre-consumer recycled content - 52%

Flat:

- Mesh mounted: 1 sheet= 0.93 sq. ft. / 16.74 sq. ft. per box
- Sheet size: nominal 13.5" x 11.25"
- Weight: 2.45 lbs. per sheet / 45 lbs. per box
- Thickness: 5/16"

Beveled:

- Mesh mounted: 1 sheet= 0.93 sq. ft. / 13.95 sq. ft. per box
- Sheet size: nominal 13.5" x 11.25"
- Weight: 2.95 lbs. per sheet / 46 lbs. per box
- Thickness: 3/8"

Hexagon:

- Mesh mounted: 1 sheet= 0.96 sq. ft. / 14.4 sq. ft. per box
- Sheet size: nominal 13.625 x 11.5"
- Weight: 2.5 lbs. per sheet / 38 lbs. per box
- Thickness: 5/16"

Variations of shade are inherent characteristics of all kiln fired products. To ensure satisfaction, please visually inspect all merchandise prior to installation, as use signifies acceptance.

We will endeavor to resolve any issues that may arise with material purchased prior to installation.