


FOUNDRY26



— EST 1967 —

FACINGS

—
OF AMERICA

SIZES



RECTIFIED

COLORS

FOUNDRY26 enriches every style with the beauty of metal by giving it unusual reflections.

Technology makes the aesthetic of metal usable in a multitude of situations.

By freeing the matter from a myriad of uncertainties, a personality that merges harmony and design is left behind, blending in with any furnishing item.

The various shades make the possible combinations a veritable game of creativity.



ZINC



ALLOY



OXIDE



RAIL

INSPIRATION

FOUNDRY26

OXIDE
RAIL
DECISIVE CHARACTER

WALL _ 12"x12" Comp M RAIL
FLOOR _ 24"x24" OXIDE

OXIDE RAIL

The new metal effect porcelain stoneware interprets the latest aesthetic trends, for those who wish for a singular floor rich in personality.





OXIDE
ZINC

TRENDY
COMMERCIAL SPACES

WALL _ 12"x24" ZINC
FLOOR _ 24"x24" OXIDE _ 12"x24" ZINC

OXIDE ZINC

The interior design of modern commercial spaces finds a fundamental component in this flooring with bold character.



FOUNDRY 26



ALLOY


METAL EFFECT,
SAFELY
AND PRACTICAL

24"x24" _12"x24" ALLOY

FOUNDRY26

ALLOY

Foundry26 offers the metal matter-like feel together with the easy installation and maintenance of porcelain stoneware. It does not rust.

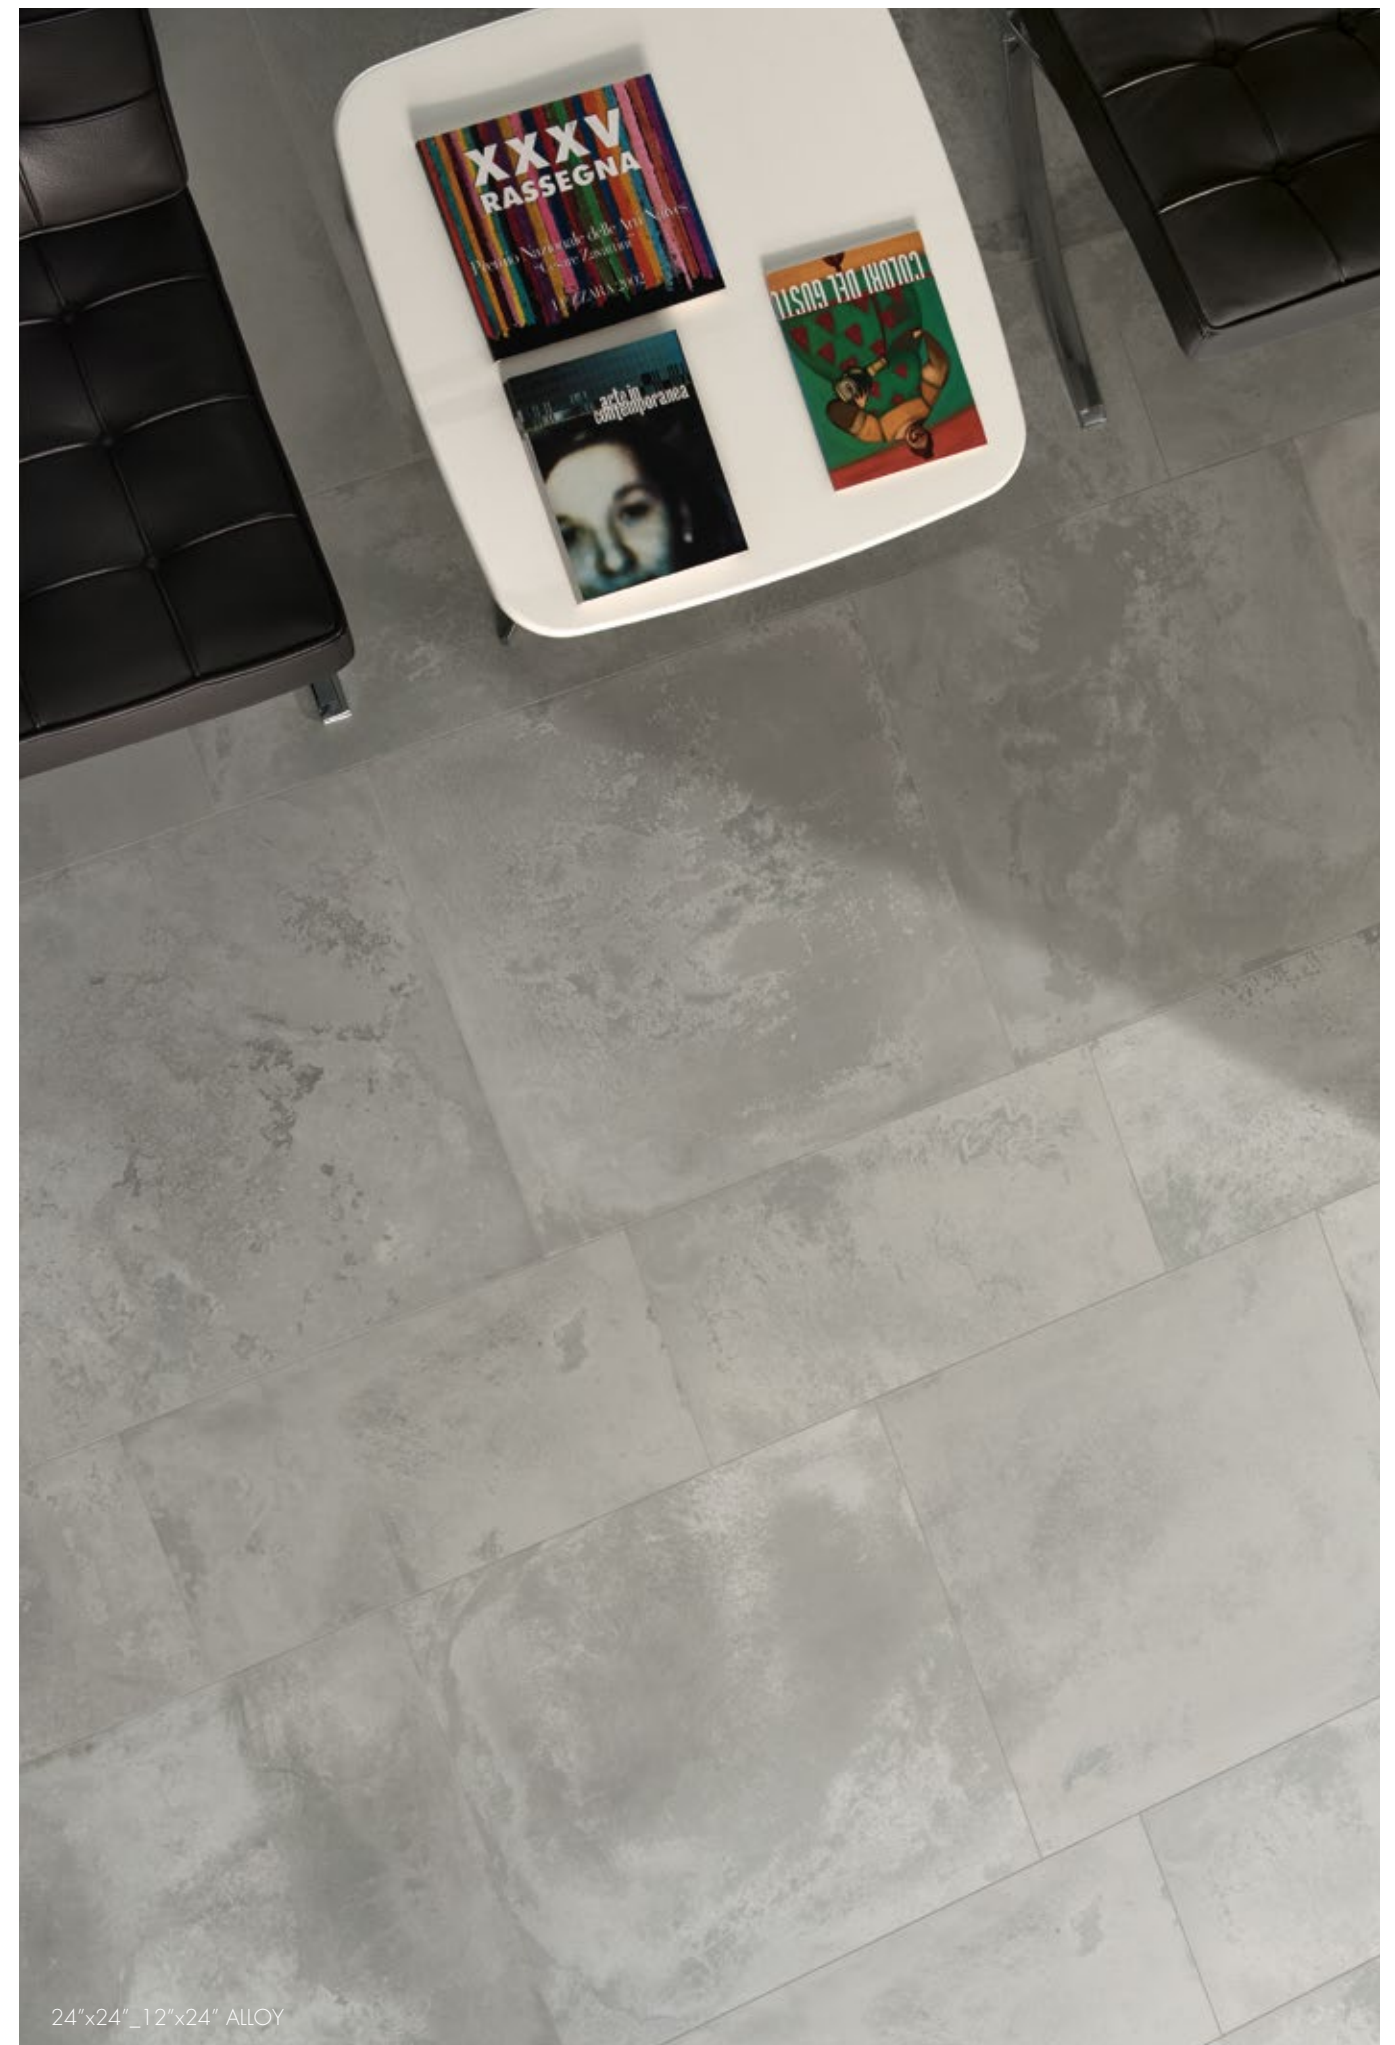

24"x24" 12"x24" ALLOY



RAIL
ZINC

HIGH PROFILE
AESTHETICS

WALL _ 12"x24" ZINC
FLOOR _ 24"x24" RAIL

RAIL ZINC


The Foundry26 range offers 4 modern colors, designed to tone in with all the materials preferred today for use in architecture and interior design.






ZINC
Rectified_Squared

-  Porcelain Stoneware
-  Floor
-  Wall
-  V2 Slight Variation
-  BOOT 3000 compliant
-  Thickness 3/8" (9mm)
-  Rectified Tile
-  NO V.O.C
-  Frost Proof
-  Low water absorption (<0.5%)
-  Made in Usa




24"x24"



12"x24"


DECORS

Composizione M




12"x12" _ Tozzetto size 2"x 2"

TRIMS













3"x24" _ Bullnose




6"x12" _ Covebase



ALLOY
Rectified_Squared

-  Porcelain Stoneware
-  Floor
-  Wall
-  V2 Slight Variation
-  BOOT 3000 compliant
-  Thickness 3/8" (9mm)
-  Rectified Tile
-  NO V.O.C
-  Frost Proof
-  Low water absorption (<0.5%)
-  Made in Usa




24"x24"



12"x24"


DECORS

Composizione M




12"x12" _ Tozzetto size 2"x 2"

TRIMS









3"x24" _ Bullnose




6"x12" _ Covebase




OXIDE
Rectified_Squared

-  Porcelain Stoneware
-  Floor
-  Wall
-  V2 Slight Variation
-  BOOT 3000 compliant
-  Thickness 3/8" (9mm)
-  Rectified Tile
-  NO V.O.C
-  Frost Proof
-  Low water absorption (<0.5%)
-  Made in Usa




24"x24"



12"x24"


DECORS

Composizione M




12"x12" _ Tozzetto size 2"x 2"

TRIMS



3"x24" _ Bullnose




6"x12" _ Covebase




RAIL

Rectified_Squared



24"x24"




12"x24"

- 
Porcelain
Stoneware
- 
Floor
- 
Wall
- 
Slight
Variation
- 
BOOT 3000
compliant
- 
Thickness
3/8" (9mm)
- 
Rectified Tile
- 
NO
V.O.C
- 
Frost
Proof
- 
Low water
absorption
(<0.5%)
- 
Made
in Usa


DECORS

Composizione M




12"x12" _ Tozzetto size 2"x 2"

TRIMS



3"x24" _ Bullnose



6"x12" _ Covebase

METAL LOOK

FOUNDRY26

COLORED-BODY PORCELAIN TILES - RECTIFIED

Colored-body porcelain stoneware tiles are produced minimizing the color difference between the glaze and the body. Nevertheless, the design is visible only on the surface.



Zinc	●	●	●	●
Oxide	●	●	●	●
Rail	●	●	●	●
Alloy	●	●	●	●

● Matt / rectified one caliber

PACKAGING

SIZE		BOX				PALLET					
INCHES	MM	PCS	SURFACE (SQF)	SURFACE (SQM)	WEIGHT (LBS)	WEIGHT (KG)	BOXES	SURFACE (SQF)	SURFACE (SQM)	WEIGHT (LBS)	WEIGHT (KG)
24"x24"	610x610	3	11,62	1,08	~47,62	~21,6	40	464,8	43,2	~1904,8	~864
12"x24"	305x610	7	13,56	1,26	~55,55	~25,2	40	524,4	50,4	~2222	~1008

<p>V0 Very Uniform appearance. Pieces of the same shade value are very uniform and smooth in texture. They can be measured for small color differences and are in compliance with the color uniformity requirements of tables 6-10 (ANSI A137.1-2012)</p>	<p>V1 Uniform Appearance. Differences among pieces from the same production run are minimal.</p>	<p>V2 Slight Variation. Clearly distinguishable texture and/or pattern within similar colors.</p>	<p>V3 Moderate Variation. While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.</p>	<p>V4 Substantial Variation. Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or textures from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Color reproductions may vary from actual products.

Facings reserves the right to modify the products illustrated in this catalogue for reasons of production or to improve quality. Samples are purely indicative. Packaging and weights may vary for production reasons. Contact our sales department when ordering.

In case of running pattern installation, Facings recommends a maximum 33% offset.

Facings warrants that our products meet or exceed the requirements of ANSI, specification ANSI A137.1: 2012, as shown in our Tile Performance Data sheets.

TILE PERFORMANCE DATA

COLORED-BODY PORCELAIN TILES - RECTIFIED

CLASSIFICATION IN ACCORDANCE WITH ANSI A137.1: 2012 (P1 CLASS).

TECHNICAL FEATURE	ASTM TEST	VALUE REQUIRED ANSI A 137.1-2012	FACINGS AVERAGE VALUE
Facial dimension	ASTM C-499	±0,5% o ±2,0 mm	In accordance to ANSI A 137.1-2012
Thickness	ASTM C-499	0,040 inch max (1 mm)	
Wedging	ASTM C-502	≤ 0,5% (+/- 2 mm)	
Warpage diagonal	ASTM C-485	≤ 0,5% (+/- 2 mm)	
Warpage edge (for tile <610x610 mm)	ASTM C-485	±0,40% or ±1,3 mm	
Warpage edge (for tile >610x610 mm)	ASTM C-485	±0,40% or ±1,8 mm	
Water absorption	ASTM C-373	≤ 0,5%	Passed "impervious tiles" Class P1
Breaking strength	ASTM C-648	≥ 250 lbs (>=1113 N)	>=400 lbs
Freeze thaw	ASTM C-1026	No damages	In accordance
Chemical resistance	ASTM C-650	As reported	Unaffected
MOHS hardness			6
Dynamic Coefficient of Friction		0,42	In accordance

Average values referred to the last two years of production and related to the matt finish of the product.

Values relate to the matt finish of the product and to tests carried out by certified external laboratories, whose results are available upon request at Headoffice. Be sure to use the same caliber tiles.

Color reproductions may vary from actual products.

* Due to the intrinsic nature of porcelain stoneware tiles, please note that the coefficient of friction may vary within the same production lot or from one production lot to the other. Facings products can become slippery when wet. We recommend to always keep the surface dry.

CLEANING PROCEDURES

- After 36/48 hours, when both the floor and the grouts have completed their first drying phase and before the real phase of the floor has yet to begin, it is necessary to proceed with the cleaning of the tiled surface using a "padding" action acid detergent, diluted according to the manufacturer's instructions.
- For areas heavily stained with grout, it is necessary to repeat this operation once or twice, increasing the percentage of water.
- The excess grout residue must be removed so that it does not dry and stick on the surface. It is necessary to change the cleaning water frequently and rinse well.
- Care must be taken on inlaid, polished and anti-slip products; for the latter in particular, the use of a floor-washing machine combined with the action of an acid detergent helps reach the spaces between adjacent tiles and clean them properly.
- If such a cleaning procedure is not carried out, or if such cleaning is carried out too late, the grout residue creates an extremely absorbent film, which holds dirt, making the surface difficult to clean: in this case, **Facings of America, INC.** will not be liable for any damage caused to the surface.
- We would like to remind you that porcelain stoneware is a product with excellent technical features which allow for high grade of mechanical wear and resistance to acids (except for hydrofluoric acid and its derivatives) and alkalis, features which are added to a high aesthetic quality.
- Ordinary maintenance must be carried out using specialist detergents to remove stains but these detergents must not leave a wax, film or membrane residue.
- Rinsing well with plenty of clean water is a fundamental part of the cleaning procedure, therefore we advise against the use of products which state that they "do not need rinsing".
- For more detailed and updated information, please consult the website www.facingsofamerica.com, or contact our sales department.



FOUNDRY26

— EST 1967 —

FACINGS

OF AMERICA


PORCELAIN STONEWARE

Color reproductions may vary from actual products.

Facings reserves the right to modify the products illustrated in this catalogue for reasons of production or to improve quality. Samples are purely indicative. Packaging and weights may vary for production reasons. Contact our sales department when ordering.

Facings warrants that our products meet or exceed the requirements of ANSI, specification ANSI A137.1: 2012, as shown in our Tile Performance Data sheets.

The Facings complete terms and conditions of sale (including limited warranty) are specified in the price list. Should you need further information, please contact our sales department.



FOUNDRY26

— EST 1967 —

FACINGS

OF AMERICA

FACINGS OF AMERICA, INC.
4121 N 27th Street
Phoenix, AZ 85016
www.facingsofamerica.com