





OF AMERICA



A JOURNEY INTO NATURAL BEAUTY

Natural appearance, warmth and elegance lead your journey through the extraordinary beauty of Pathway surfaces. Inspired by the world of limestones, the accurate exploration and redefinition of this stone peculiarities makes any space exclusive and refined.



RANGE. COLORS, SIZES & DECORS.

COLOR-BODY PORCELAIN TILES - RECTIFIED MATTE FINISH

The warm and soft colors of Pathway are available in a complete range of MODULAR sizes, enhanced by the 2"x2" mosaic and the brand new STRETCH mosaic. A contemporary proposal, designed for those who love the beauty and versatility of natural stone.

lce



Sun



Wind




Rock






6"x 24"

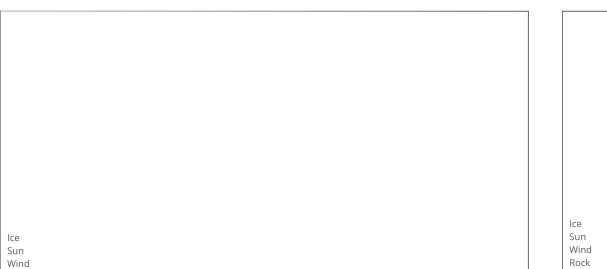


12"x 24"

Rock

24"x 24"

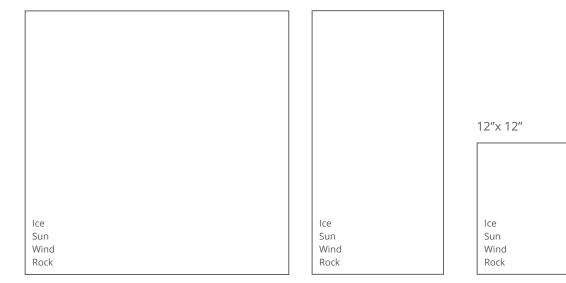


DECORS




2"x6.5" stretch mosaic on 9.4"x12" sheet

Ice Sun Wind Rock



2"x2" mosaic on 12"x12" on 12 sheet randomly mixed sun Wind Rock

TRIMS







6"x12" Covebase

Ice Sun Wind Rock

RANGE. DECORS

A classic 2"x2" mosaic to decorate floors and walls with clean cut, square tesserae and a brand new 2"x6,5" STRETCH mosaic, elegantly shaped to cover your spaces with sophisticated geometries.




BRAND NEW

2"x6.5" stretch mosaic


5

Floor: Sun 24"x24", 12"x24" Wall: Sun, Ice, Rock 6"x24"



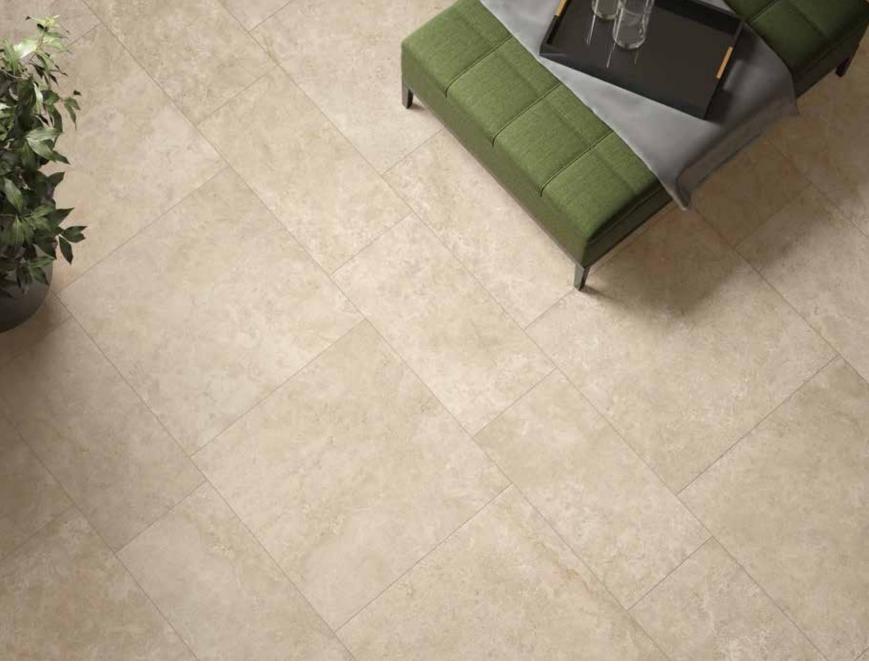

Floor: Sun 24"x24", 12"x24"

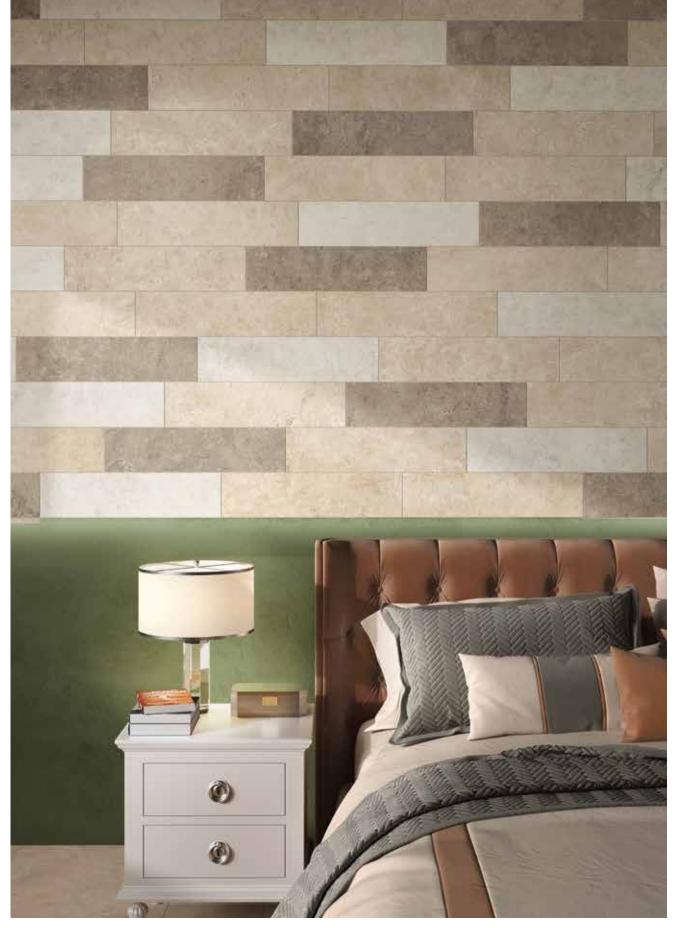

Wall: Sun, Ice, Rock 6"x24"

SUN





Floor: Sun 24"x24", 12"x24" Wall: Sun stretch mosaic 9.4"x12"

SUN

Floor: Ice 24"x48", Ice mosaic 12"x12" Wall: Ice 24"x48", Ice mosaic 12"x12"





ŝ



Floor: Ice 24"x48", Ice mosaic 12"x12"



Wall: Ice 24"x48", Ice mosaic 12"x12"





C IN

WIND A BREATH OF ELEGANCE



Indoor: Wind 48"x24", 24"x24", 12"x24", 12"x12" Outdoor: Wind stretch mosaic 9.4"x12"



Floor: Wind 48"x24", 24"x24", 12"x24", 12"x12"

WIND








Floor: Rock 12"x24" Platform: Rock mosaic 2"x2"




Floor: Rock 12"x24" Wall: Rock 12"x24", 6"x24"

ROCK

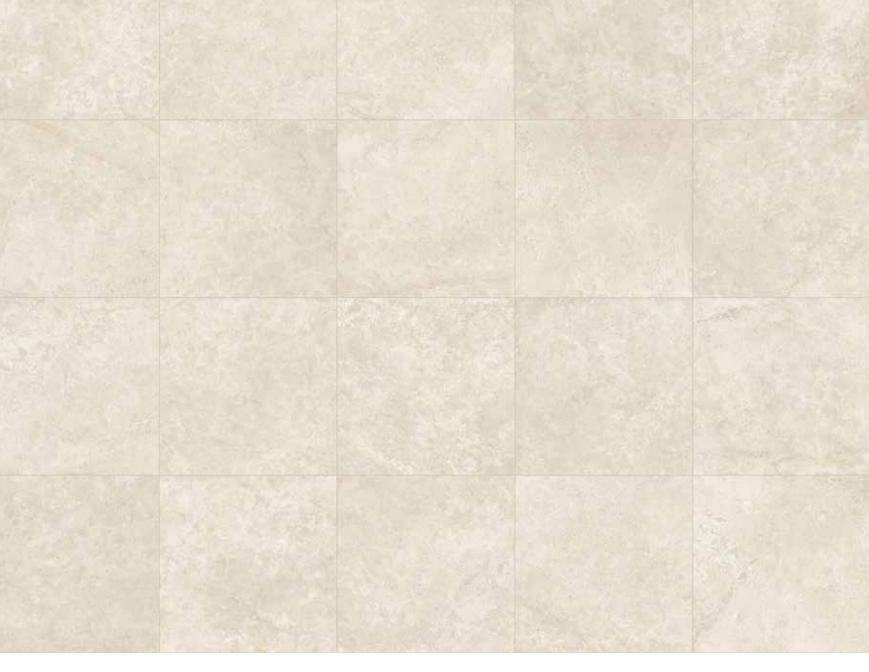

ΙΟΕ

V2 Rectified, squared, one caliber.

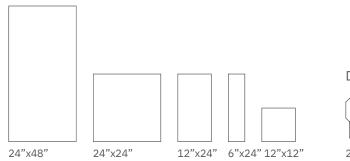

DECORS




2"x6.5" stretch mosaic 2"x2" mosaic on 9.4"x12" sheeton 12"x12" sheet randomly mixed

TRIMS




3"x24" Bullnose

6"x12" Covebase

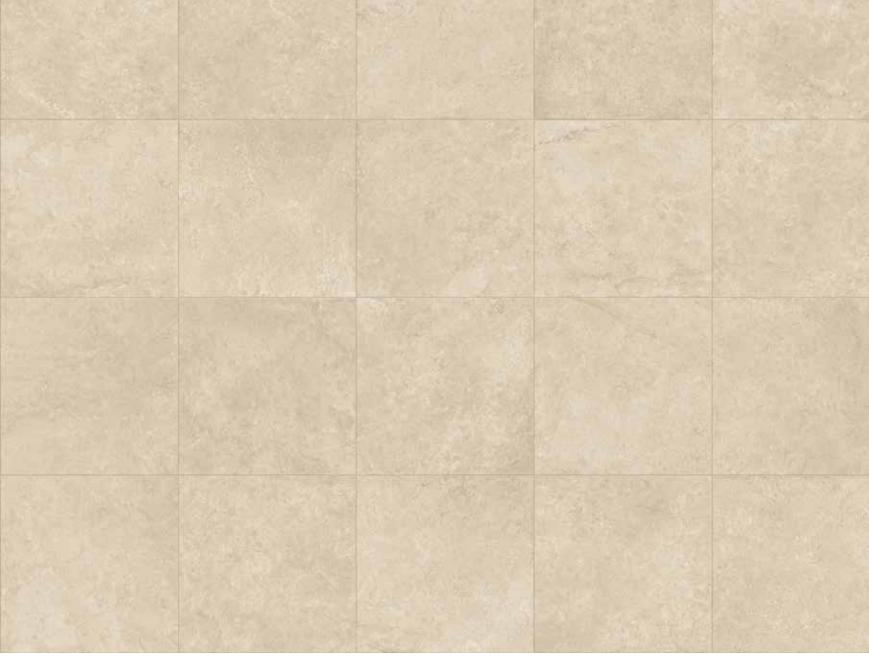

SUN

V2 Rectified, squared, one caliber.



DECORS



2"x6.5" stretch mosaic 2"x2" mosaic on 9.4"x12" sheeton 12"x12" sheet randomly mixed TRIMS

3"x24" Bullnose




6"x12" Covebase



WIND


V2 Rectified, squared, one caliber.

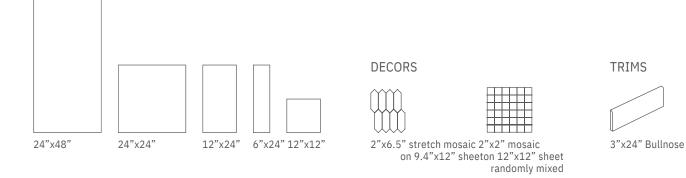




6"x12" Covebase

PATHWAY

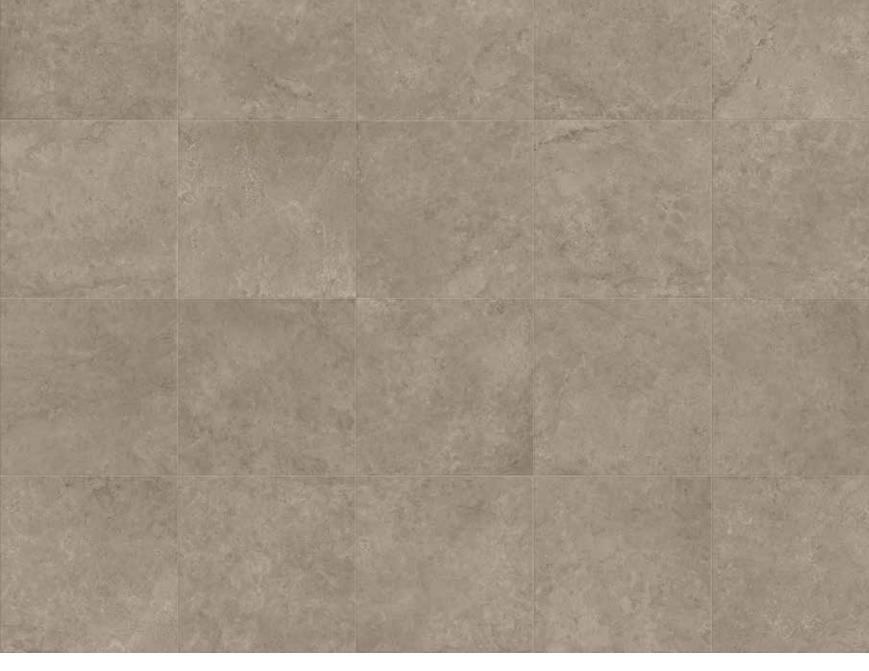

ROCK


V2 Rectified, squared, one caliber.





DECORS





TRIMS

3"x24" Bullnose

6"x12" Covebase

DECORS

ICE



2"x2" mosaic on 12"x12" sheet

SUN



2"x2" mosaic on 12"x12" sheet

WIND



2"x2" mosaic on 12"x12" sheet



2"x2" mosaic on 12"x12" sheet

ROCK



2"x6.5" stretch mosaic on 9.4"x12" sheet



2"x6.5" stretch mosaic on 9.4"x12" sheet




2"x6.5" stretch mosaic on 9.4"x12" sheet




2"x6.5" stretch mosaic on 9.4"x12" sheet



RANGE

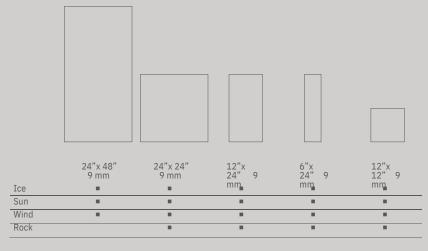


Rectified, squared, one caliber.




Slight Variation. Clearly distinguishable texture and/or pattern within similar colors.

Available in all colors



V2



2"x6.5" stretch mosaic on 9.4"x12" sheet



PACKAGING Size Box

InchesPcsSurface (sqf)Surface (sqm)Weigth (lbs)


Pallet

					Weigth (kg)	Boxes	Surface (sqf)	Surface (sqm)	Weigth (lbs)	Weigth (kg)
24"x 48"	2	15.51	1.44	~62.81	~28.4	35	542.85	50.43	~2200	~997
24"x 24"	3	11.63	1.08	~47.62	~21.6	40	465.00	43.2	~1904.77	~864
12"x 24"	7	13.56	1.26	~55.56	~25.2	40	542.51	50.4	~2222.24	~1008
6"x 24"	12	11.63	1.08	~47.62	~21.6	40	465.00	43.2	~1904.77	~864
12"x 12"	10	9.69	0.9	~39.68	~18	36	348.75	32.4	~1428.58	~648
2"x 2" Mosaic	10	9.69	0.9	~39.68	~18	36	348.75	32.4	~1428.58	~648
2"x 6,5" Stretch mosaic	sheets 5	3.23	0.30	~3.12	~5.95	60	139.80	18.00	~1787.20	~357

We recommend you a 2/3 mm grout joint to simplify the laying and optimize the naturalness of the final result. In order to favour the ordinary maintenance procedures, it is recommended to carry out an acid wash of the surface after 48 hours from grout filling using an acid agent specific for porcelain stoneware tiles.

Manufacturer reserves the right to change the products presented in this catalogue at any time. Tones of


samples are indicative



V3

Moderate Variation. While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection. viewed before selection.






Substantial Variation. Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or textures from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection. V4





Slight Variation. Clearly distinguishable texture and/or pattern within similar colors.

SOME INSTALLATION PATTERNS SUGGESTIONS


Recommended Joint width 4mm (approximately 5/32")

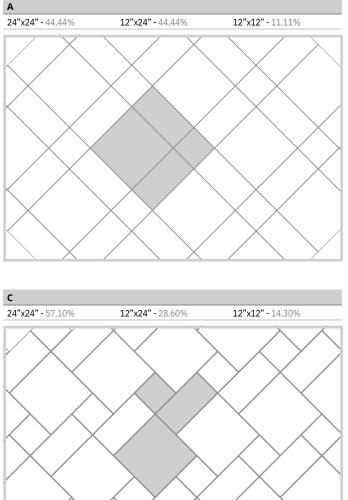




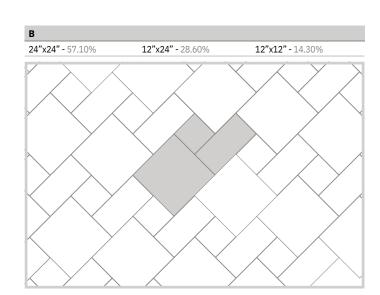







PATHWAY

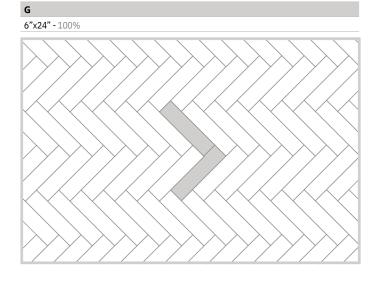


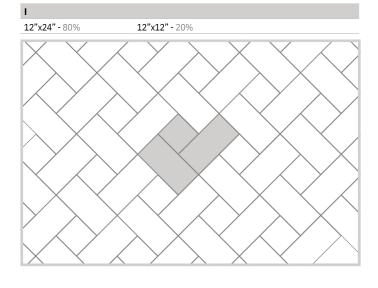



М

12"x24" - 50%



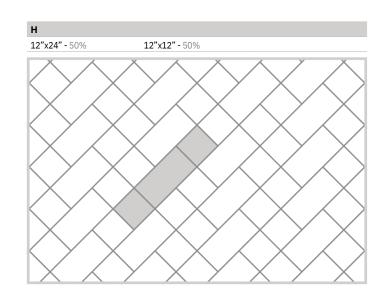

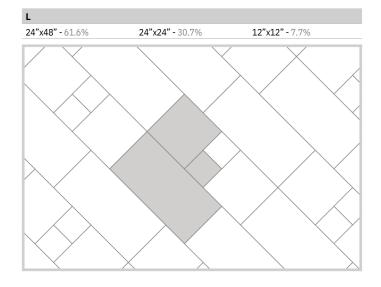

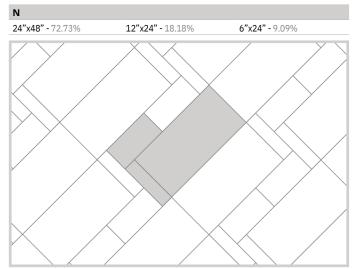

SUSTAINABLE MIND

MAXIMUM CONCERN FOR THE ENVIRONMENT

FROM OUR PLANT...

brand new production facilities



The in the USA are built in compliance with the most stringent standards in term of environmental protection, safety of workers and reduction of energy consumption.



TO YOUR PROJECT.

By choosing this product, the end user will be sure to purchase **durable**, **safe and green floor and wall tiles:** being extremely durable, they do not call for any chemical treatment, varnish or special detergent. They do not release dust or other substances, even when subject to high pedestrian traffic. **TILE PERFORMANCE DATA** COLOR-BODY PORCELAIN TILES - RECTIFIED

Classification in accordance with ANSI A137.1 (P1 class).

			0.0.C Frost Proof Low water absorption Made in USA
TECHNICAL FEATURE	METHOD	VALUE REQUIRED ANSI A 137.1	FACINGS AVERAGE VALUE
Facial dimension	ASTM C-499	± 0.25% or ± 0.03 in	
Wedging	ASTM C-502	± 0.25% or ± 0.03 in	In accordance to ANSI A 137.1
Warpage diagonal	ASTM C-485	± 0.4% or ± 0.07 in	- IN accordance to ANSI A 137.1
Warpage edge	ASTM C-485	± 0.4% or ± 0.05 in	
Thickness	ASTM C-499	RANGE: 0.040 inch max (1 mm)	In accordance to ANSI A 137.1
Water absorption	ASTM C-373	≤ 0.5%	Passed "impervious tiles" Class P1
Breaking strength	ASTM C-648	≥ 250 lbs (≥1113 N)	≥400 lbs
Freeze thaw	ASTM C-1026	No damages	In accordance
Chemical resistance	ASTM C-650	As reported	Unaffected
MOHS hardness			6
		Declare	WET DOCF ≥0.42
Dynamic Coefficient of Friction	ANSI A 326.3	Classified	Interior Wet
	Commercial Porcelain Stoneware Flor TECHNICAL FEATURE Facial dimension Image diagonal Wedging Image diagonal Image diagonal Warpage edge Image diagonal Image diagonal Thickness Image diagonal Image diagonal Stoneware Image diagonal Image diagonal Freeze thaw Image diagonal Image diagonal Chemical resistance Image diagonal Image diagonal	CommercialPorcelain StonewareFloorWallTECHNICAL FEATUREMETHODFacial dimensionASTM C-499WedgingASTM C-502Warpage diagonalASTM C-485Warpage edgeASTM C-485ThicknessASTM C-499Water absorptionASTM C-499Breaking strengthASTM C-648Freeze thawASTM C-1026Chemical resistanceASTM C-650MOHS hardnessASTM C-650	Commercial Procelain Stoneware Floor Wall DCOF compliant Thickness 3/8" Rectified Tile N TECHNICAL FEATURE METHOD VALUE REQUIRED ANSI A 137.1 Facial dimension ASTM C-499 ± 0.25% or ± 0.03 in Wedging ASTM C-502 ± 0.25% or ± 0.03 in Warpage diagonal ASTM C-485 ± 0.4% or ± 0.07 in Warpage edge ASTM C-485 ± 0.4% or ± 0.05 in Thickness ASTM C-499 RANGE: 0.040 inch max (1 mm) Water absorption ASTM C-648 ≥ 250 lbs (≥1113 N) Freeze thaw ASTM C-650 As reported MOHS hardness ASTM C-650 As reported

Average values referred to the last two years of production and related to the matte finish of the product. Values relate to the matte finish of the product and to tests carried out by certified external laboratories, whose results are available upon request. Be sure to use the same caliber tiles. Color reproductions may vary from actual products. * Due to the intrinsic nature of porcelain stoneware tiles, please note that the coefficient of friction may vary from one production lot to an other.

Facings products can become slippery when wet. We recommend to always keep the surface dry.

ACTUAL SIZES FOR RECTIFIED MATERIAL

NOMINAL	SIZE	ACTUAL SIZE	ММ
24"x48"	610x1220	23 ^{15/32} "x47 ^{3/64} "	596x119
24"x24"	610x610	23 ^{15/32} "x23 ^{15/32} "	5
12"x24"	305x610	11 ^{1/16} 'x23 ^{15/32} "	596x596
6"x24"	152x610	545/64"x23 15/32"	297x596
8"x40"	203x1016	7 ^{23/32} "x39 ^{11/64} "	145x596
			196x995

ACTUAL SIZES FOR RECTIFIED MATERIAL - 3/4" THICKNESS

NOMINAL SI	ZE	ACTUAL SIZE				
INCHES	MM	INCHES	MM			
24"x24"	610x610	23 ^{35/64} "x23 ^{35/64} "	598x598			

ACTUAL SIZES FOR NON-RECTIFIED MATERIAL

NOMINAL SIZE INCHES MM			TUAL SIZE	ММ		
12"x24"	305x610	1113/16"x2347/64"	8"x40"	203x1016	300x603	
77/8"x393/8"					200x1000	
*For more detailed information about the different actual sizes for non-rectified material, please contact manufacturer.						





OF AMERICA