




COLORS

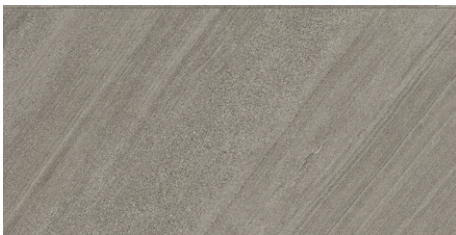

PUMICE NATURAL 24"X48"

Flow creates serene yet lively spaces with rich, earthy tones and fluid movement. Its versatility and durability make this porcelain suitable for both residential and commercial interior and exterior environments.

APPLICATIONS
 INTERIOR WALLS & FLOORS
 EXTERIOR WALLS & FLOORS
 STEAM SHOWERS
 POOLS & SPAS

FLOOR TILES	CLASSIFICATION IN ACCORDANCE WITH EN 14411 ANNEXE G B Ia UGL			
FORMAT	RECTIFIED PORCELAIN			
NUMBER OF FACES	16			
ACTUAL DIMENSIONS	23.62"X47.24" (24"X48")			
THICKNESS	9MM			
PHYSICAL-CHEMICAL PROPERTIES	STANDARD OF TEST	REQUIREMENTS	AVERAGE RATING	
WATER ABSORPTION	ISO 10545-03	≤ .5%	CONFORMS	
RESISTANCE TO BENDING	ISO 10545-04	> 35N/MM²	CONFORMS	
BREAKING STRENGTH	ISO 10545-04	> 1300 N	> 2500 N	
DEEP SCRATCH RESISTANCE	ISO 10545-06	< 145 MM³	< 109 MM³	
THERMAL SHOCK RESISTANCE	ISO 10545-09	PASS ACCORDING TO EN ISO 10545-1	CONFORMS	
CHEMICAL RESISTANCE	ISO 10545-13	CLASS UB MIN (UGL)	GLA/GHA CONFORMS	
FROST RESISTANCE	ISO 10545-12	PASS ACCORDING TO EN ISO 10545-1	CONFORMS	
STAIN RESISTANCE	ISO 10545-14	CLASS 3 MIN	CLASS 5	
		AVERAGE VALUE		
SKID RESISTANCE	STANDARD OF TEST	INTERNATIONAL VALUE	NATURAL	TEXTURED
	DM. 23689 BCRA	> 0.40	> 0.40	> 0.40
	ANSI A 137.1	WET DCOF > 0.42	> 0.42	> 0.42
	DIN 51130	N/A	R10	R11
	DIN 51097	N/A	A	A+B+C
	AS 4586	N/A	CLASS P3	N/A
USE CLASSIFICATION		HEAVY TRAFFIC		

PLEASE VIEW ACTUAL MATERIAL BEFORE MAKING YOUR SELECTION, AS PRINTED IMAGES ARE ONLY REPRESENTATIVE OF THEIR BEAUTY. SHADE VARIATION IS TO BE EXPECTED.

— EST 1967 —
FACINGS
 —
 OF AMERICA