

MELANGE



— EST 1967 —

FACINGS

—
OF AMERICA

Discover the new ceramic collection, where colors intertwine in a rainbow of perfect transitions. Each piece is a work of art celebrating the harmonious fusion of shades, like a sunset gently fading into the night.

Experience the deconstruction of colors that transforms the perception of transitions.


"Live in gradient."

Descubre la nueva colección de cerámica, donde los colores se entrelazan en un arcoíris de transiciones perfectas. Cada pieza es una obra de arte que celebra la fusión armoniosa de tonalidades, como un atardecer que se desvanece suavemente en la noche.

Experimenta la deconstrucción de los colores que transforman la percepción de las transiciones.

"Vive en degradado."

01. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	<i>pag. 4</i>
02. GET INSPIRED / INSPIRATE	<i>pag. 6</i>
03. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	<i>pag. 28</i>
04. PACKING	<i>pag. 29</i>
05. PRICE CODE / CÓDIGO DE TARIFA	<i>pag. 29</i>
06. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	<i>pag. 30</i>
07. RECOMMENDATIONS / RECOMENDACIONES	<i>pag. 31</i>

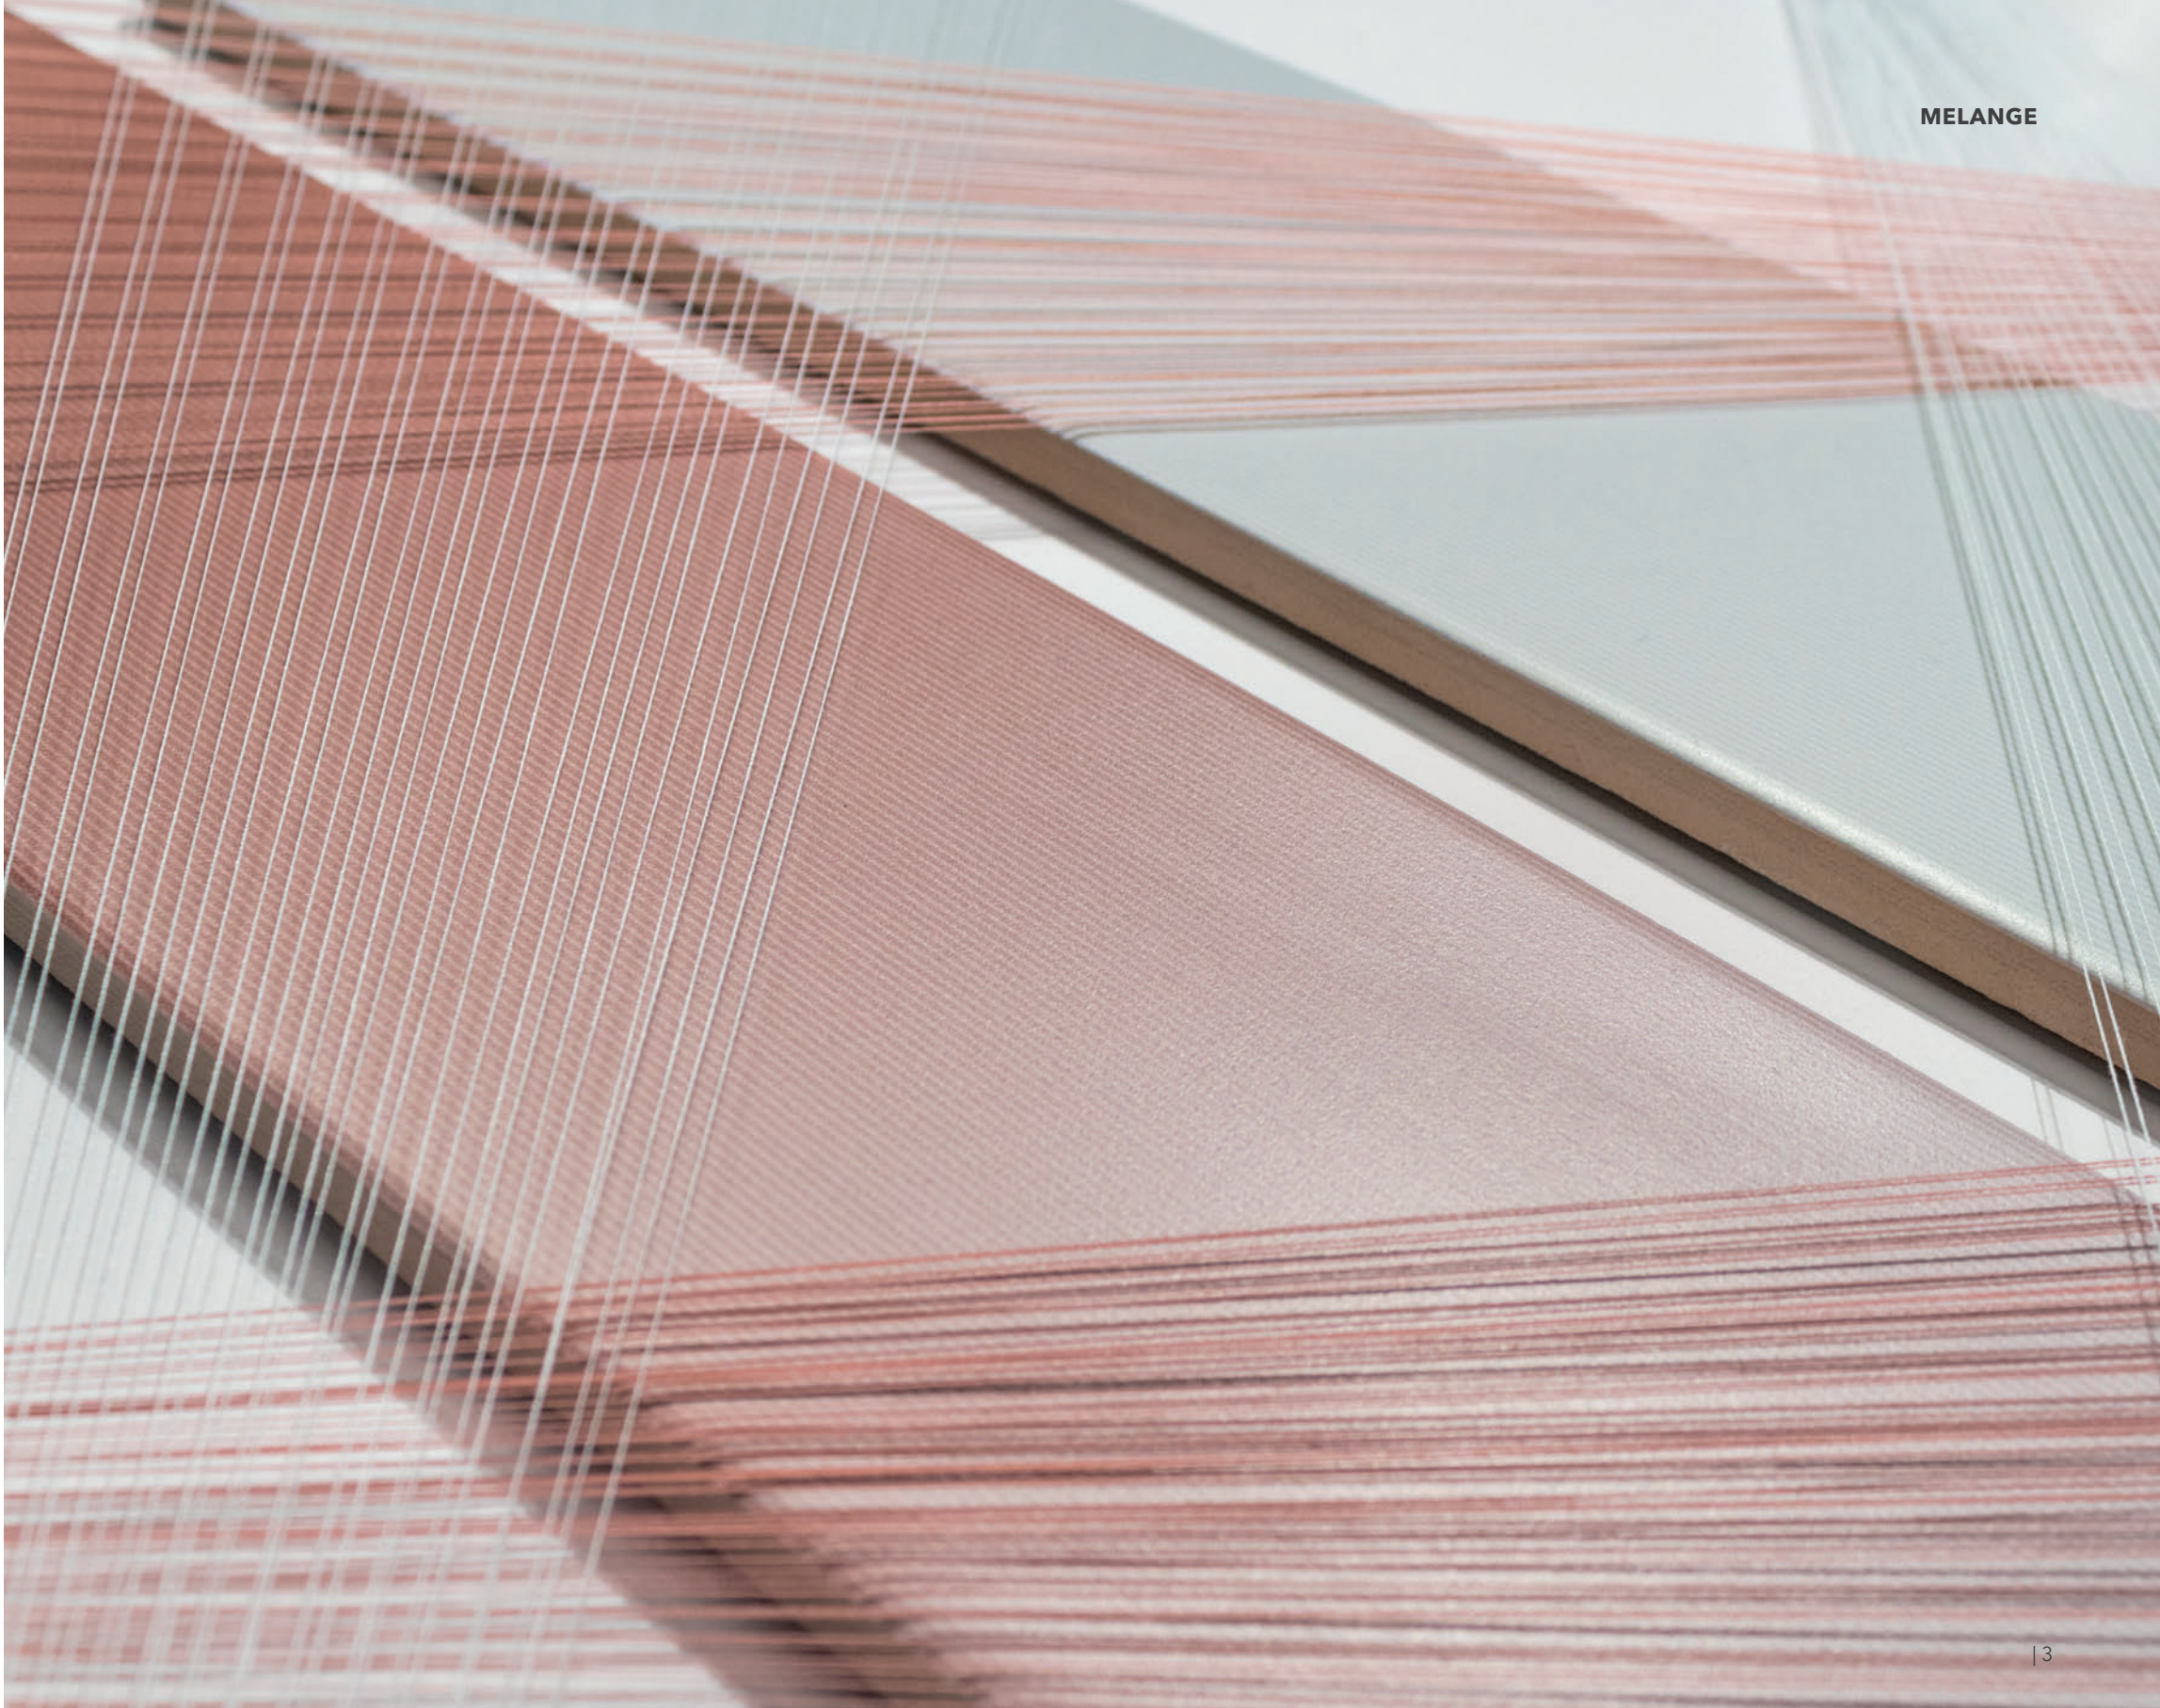





Melange Lake 20%, Lake Talc 20%, Talc 20%, Talc Rose 20% & Rose 20%

MELANGE 10,7x54,2 cm / 4.2"x21.3"

W S W12

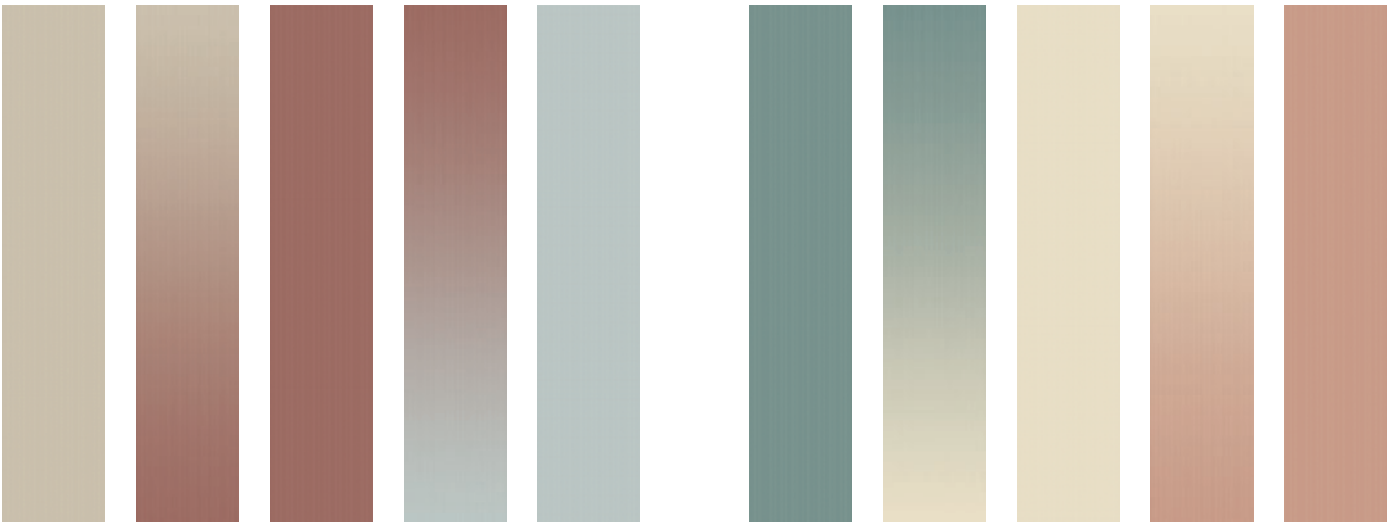

Cream Cream Earth Earth Earth Sky Sky Lake Lake Talc Talc Talc Rose Rose

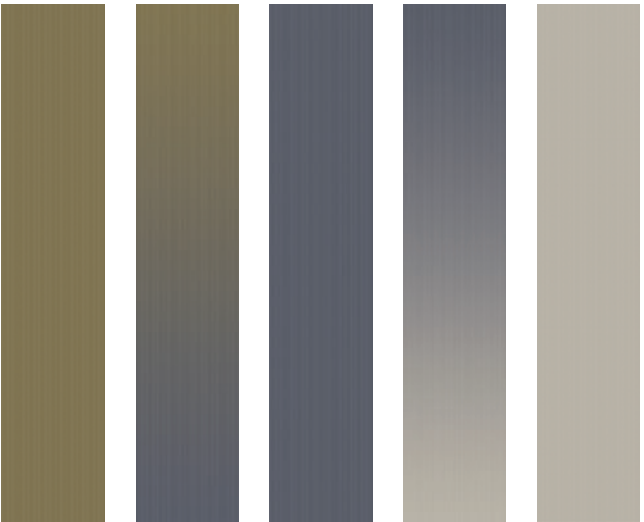

Kahki Kakhi Sea Sea Cloud Cloud

Melange Cream, Cream Earth, Earth, Earth Sky & Sky

Floor: Solid XL Sky (Solid Collection)




Melange Cream Earth 33,3%, Earth 33,3% & Earth Sky 33,3%

Melange Cream & Sky





Melange Cream 40%, Cream Earth 20% & Earth 40%

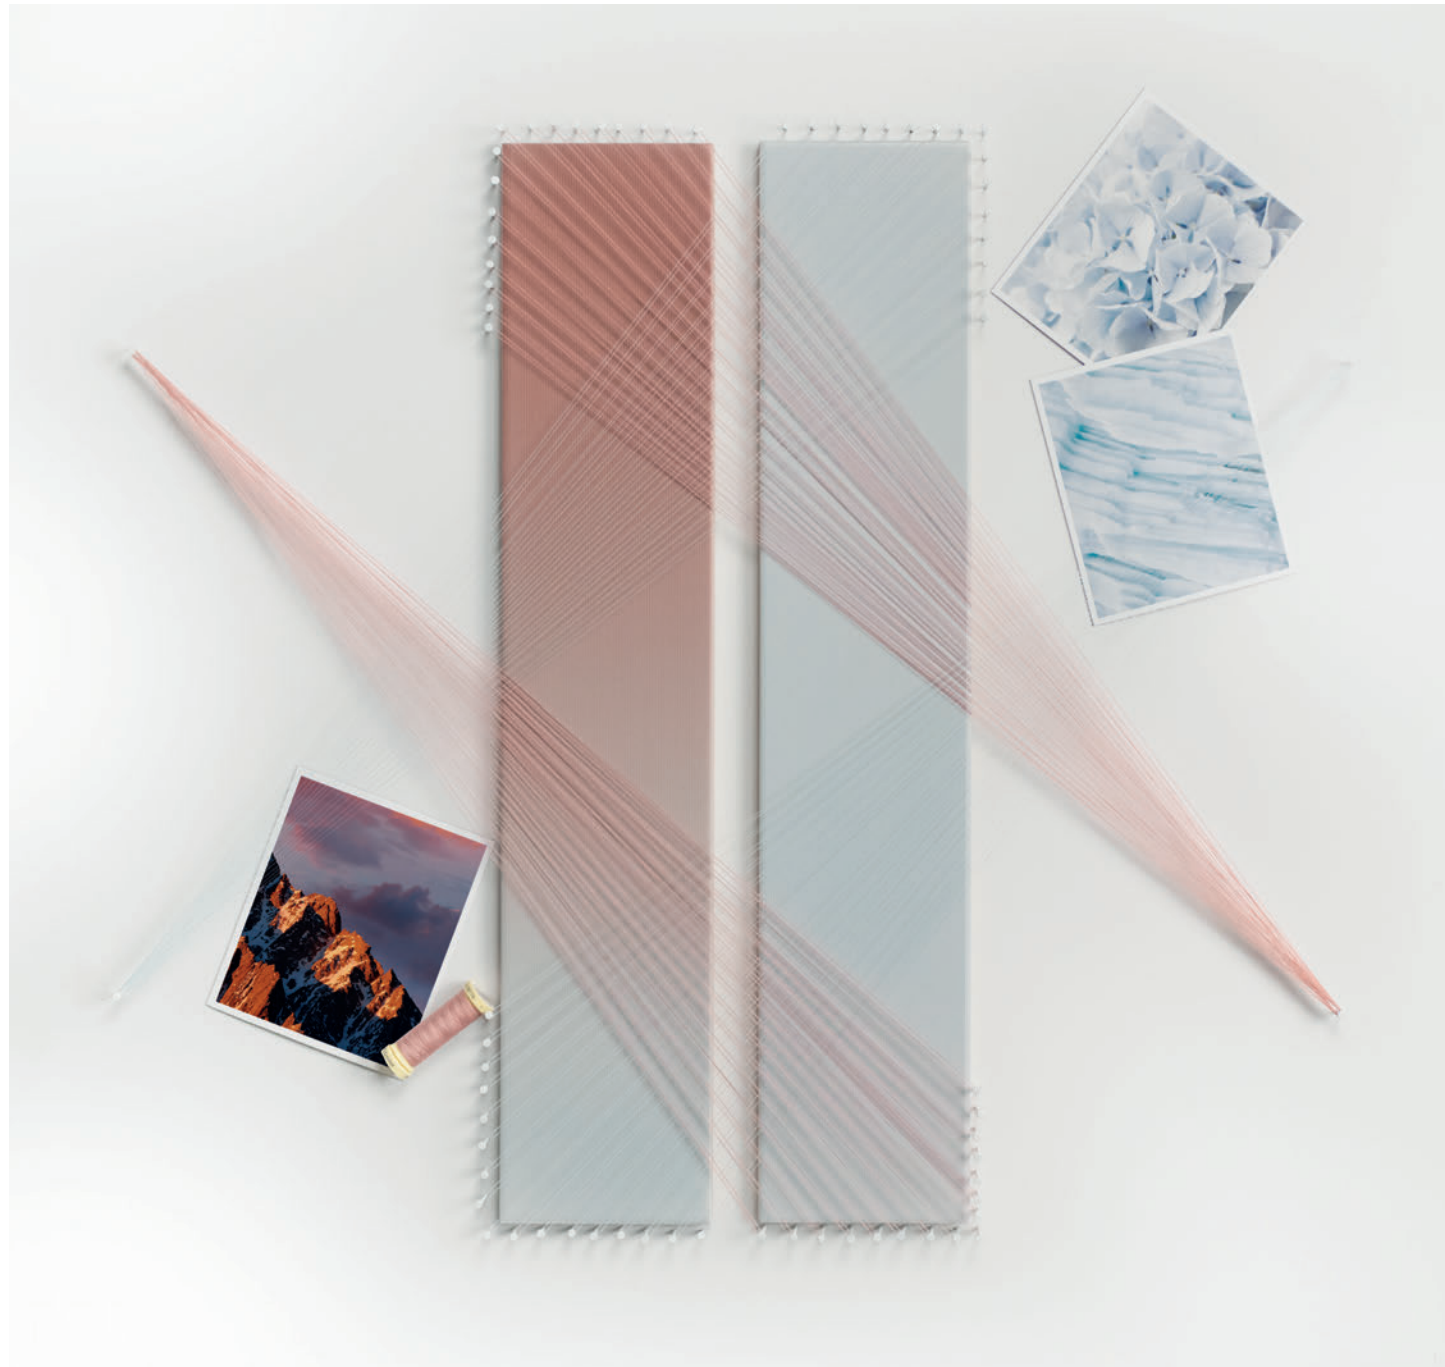

Melange Earth 20%, Earth Sky 20% & Sky 60%







Melange Rose 40%, Talc Rose 20%, Talc 20% & Lake Talc 20%

Front Wall: **Melange** Lake





Melange Lake 60%, Lake Talc 20% & Talc 20%

Floor: **Raster** Lines S Chalk, Grid S Chalk, Lines M Chalk & Grid M Chalk (Raster Collection)

Front Wall: **Melange** Sea 40%, Khaki Sea 40% & Khaki 20%


Back Wall: **Melange** Khaki 40%, Khaki Sea 40% & Sea 20%





Melange Sea 40%, Sea Cloud 20% & Cloud 40%

Floor: Play Blanc (Tesseræ Collection)

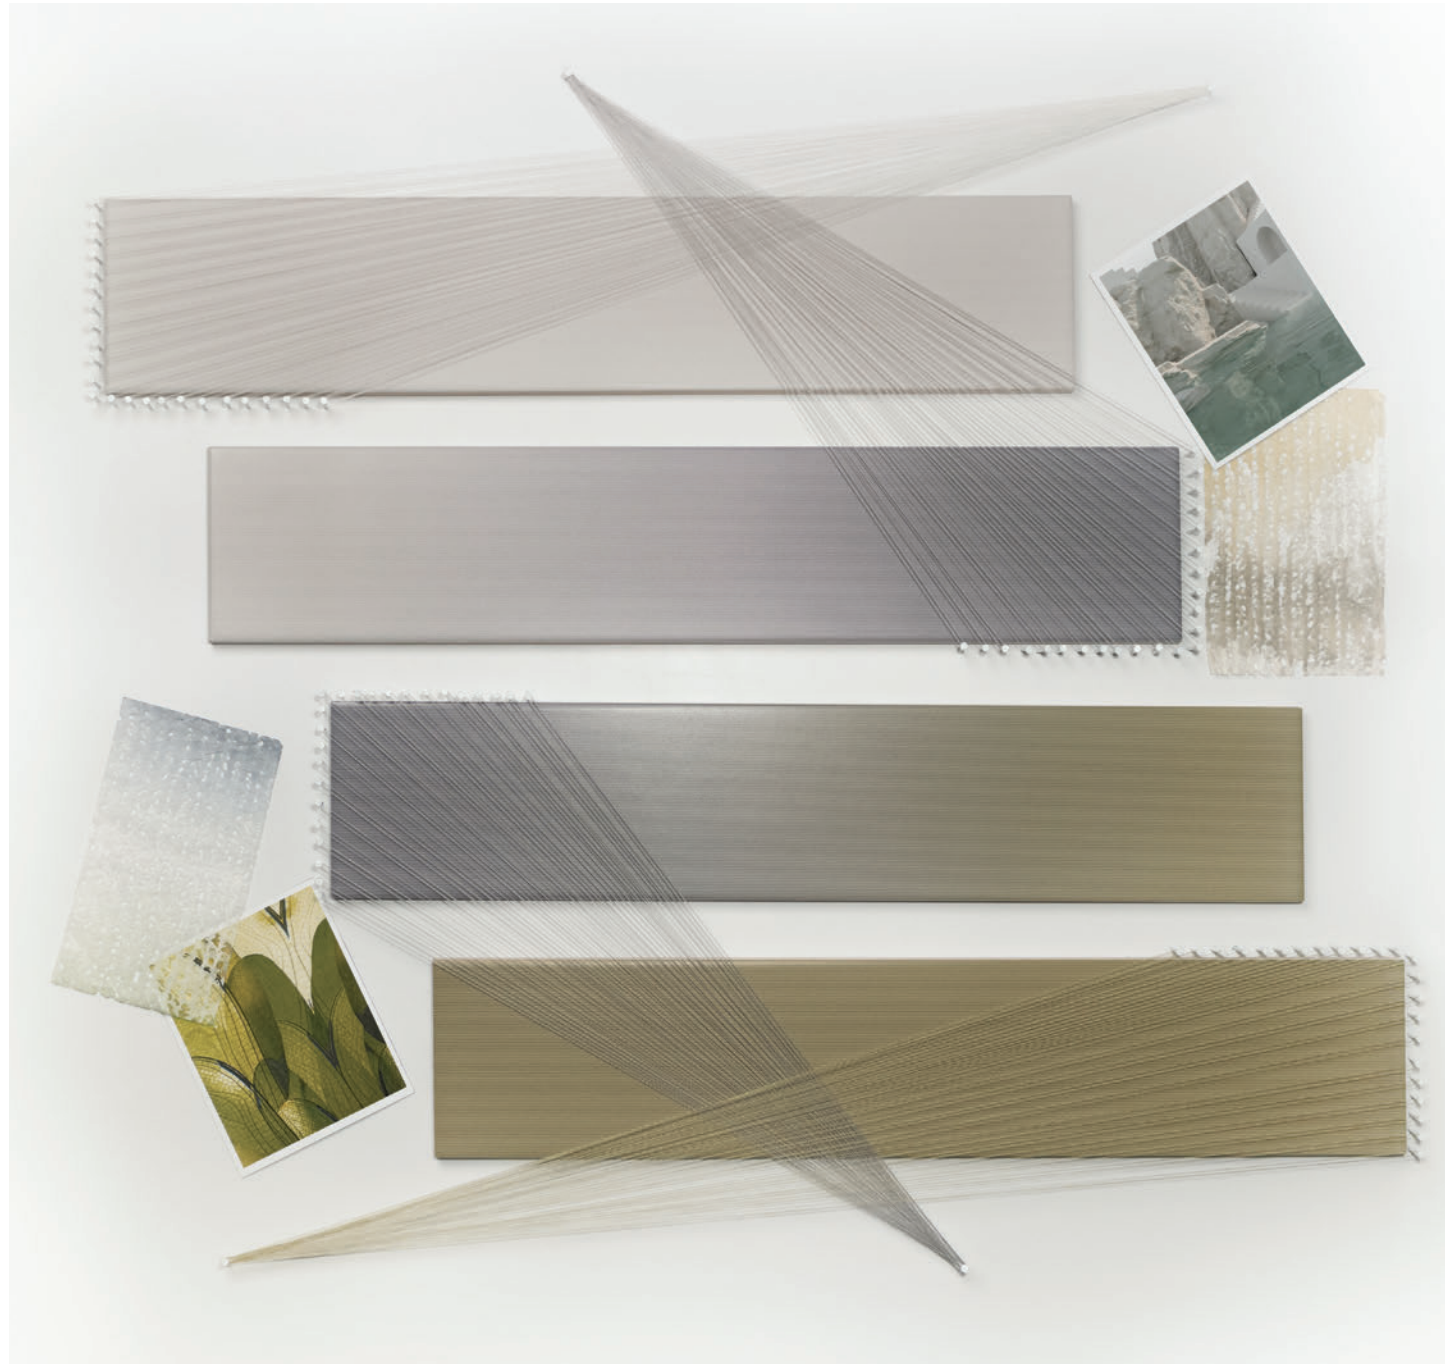

Melange Khaki 25%, Khaki Sea 12,5%, Sea 25%,
Sea Cloud 12,5% & Cloud 25%





03. TECHNICAL FEATURES / INFORMACIÓN TÉCNICA

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)
Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)

FEATURES / CARACTERÍSTICAS		SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	107 mm +/- 0,75 mm x 538,5 mm +/- 0,5 %	UNE-EN ISO 10545-2:1998
	Water absorption	E _b >10%	UNE-EN ISO 10545-3:1997
	Modulus of rupture and breaking strength	Thinkness ≤ 7,5 mm mínimo 15 N/mm ² Thinkness > 7,5 mm mínimo 12 N/mm ²	UNE-EN ISO 10545-4:2012
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	Class 5	UNE-EN ISO 10545-14:1998
	Tone variation	V1	-
	White body	-	-


04. PACKING

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
MELANGE	10,7x54,2 cm	10	9,78 kg	0,579 m²	91	52,689 m²

			LB 	FT2 		FT2 
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
MELANGE	4.2"x21.3"	10	21.561 lb	6.232 ft²	91	567.112 ft²

05. PRICE CODE

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
MELANGE	W12

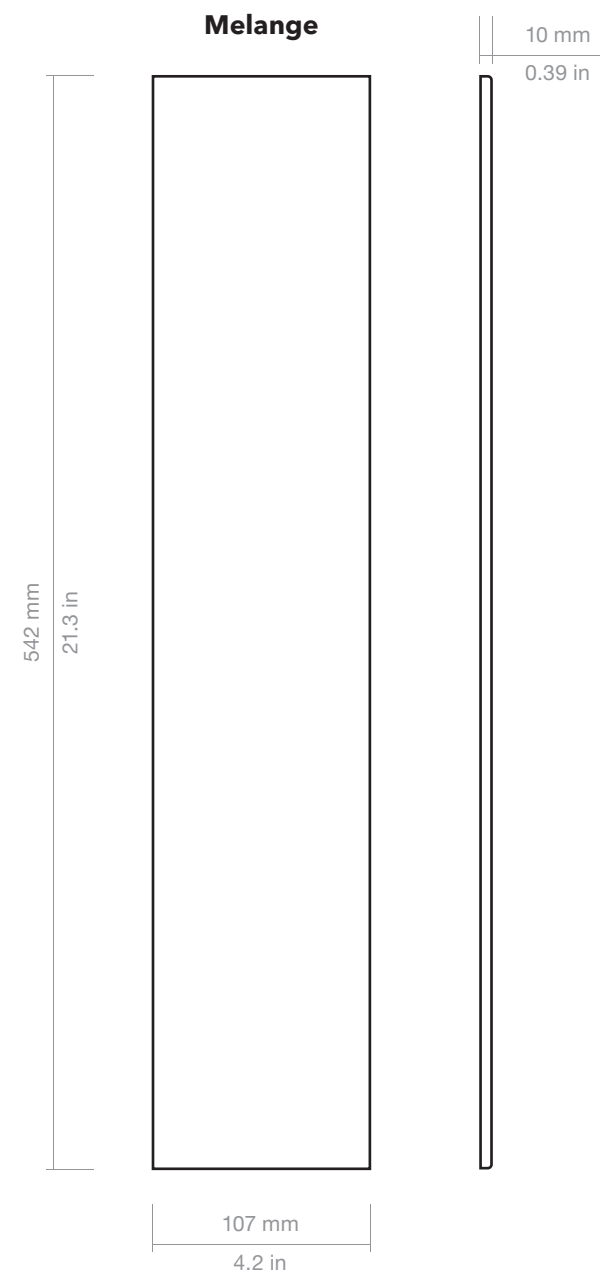

BEFORE INSTALLING THE PRODUCT

The surface where the product is being installed must be clean and level.
It is recommended that the layout of the product is prepared before the final installation.
Make sure you choose an adhesive apt for the area where the product is being installed.
For installation on porous surfaces we recommend: Kerakoll Special® Eco, and for Non-porous surfaces: Kerakoll serie H40® Eco.

The choice of quality grouting mortar is crucial.
We recommend Kerakoll Fugabella® Color.
(www.kerakoll.com)

TO ENHANCE YOUR WOW PRODUCT

In order to obtain the maximum WOW effect, use 1 mm - 0.039 in spacers between the tiles to maintain an even installation over the whole surface.
The colour of the grout should be as close as possible to the colour of your product.
Once the area has been grouted, and before the grout dries, remove any excess material with a damp sponge.

MAINTENANCE

Maintenance free. Easy and practical to care for, due to the high standard of technical characteristics in each WOW ceramic product.
Avoid abrasive or acidic cleaning products.
It is recommended to clean with clear water.

ANTES DE LA COLOCACIÓN

Preparar la superficie sobre la que se va a colocar tu producto WOW. Debe estar limpia y aplomada.
Se recomienda plantear la colocación, previo a su instalación.
Elegir el material de agarre en función de las características de la superficie.
Se recomienda para colocación general en superficies porosas: Kerakoll special® Eco. y para superficies no porosas como el pladur: Kerakoll serie H40® Eco.

Es importante la elección de un material de rejunte de calidad. WOW recomienda utilizar el material de rejunte Kerakoll fugabella® Color (www.kerakoll.com), cuyas características son especialmente adecuadas para este revestimiento.

PARA ENSALZAR EL ASPECTO DE TU PRODUCTO WOW

Se recomiendan separadores de 1 mm para colocar las piezas y conseguir de esta forma un aspecto WOW óptimo. También es aconsejable que el color de rejuntado sea similar al color del producto elegido.
Una vez rejuntado el producto, y antes de que se endurezca, retirar el material sobrante de rejuntado con una esponja mojada en agua.

MANTENIMIENTO

Práctico y sencillo de limpiar, dadas las excelentes características técnicas del producto WOW, tan sólo es necesario un cuidado rutinario, evitando la utilización de productos abrasivos o ácidos.
Se recomienda limpiar exclusivamente con agua limpia.