



1" x 2" Offset - The Shallows - Gloss

Maris

Glass Tile

— EST 1967 —
FACINGS
— OF AMERICA —

Collection Overview

Maris is a glass mosaic, handcrafted in Spain from 100% recycled glass and inspired by the quiet of the Mediterranean. Light plays across the surface of each tile to reveal organic depth, and subtle tonal shifts mean no two are quite alike.

1" x 2" Offset



Salt Mist




The Shallows



Breaker


2" x 2" Straight Set

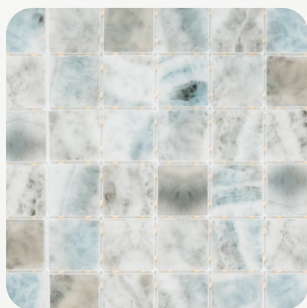

Salt Mist



The Shallows

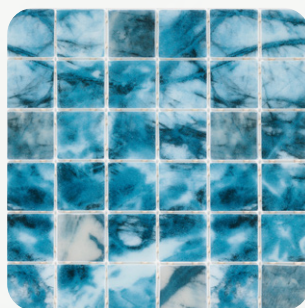

Breaker

2" x 2" V Cap



Salt Mist



The Shallows




Breaker



At a Glance:


- **Built for water:** Engineered to perform in pools, spas, and water features, and at home both beneath the waterline and as a surface above it.
- **Dot-mounted for a direct bond:** Small dots of adhesive join the tiles instead of a mesh or paper backing, leaving the full back of each tile open so mortar grips the glass directly – the secure hold a pool, spa, or water feature depends on.
- **Three coastal color stories:** The Shallows, Salt Mist, and Breaker run from luminous aqua to deep marine blue – a tone for every project.

Patterns:

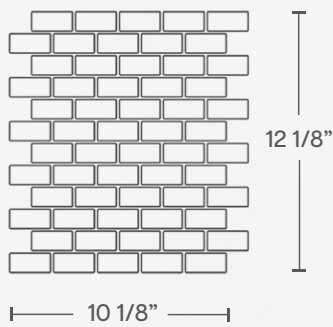


1" x 2" Offset

All dimensions are nominal.
One Piece = 0.85 sf
Thickness: 1/4"

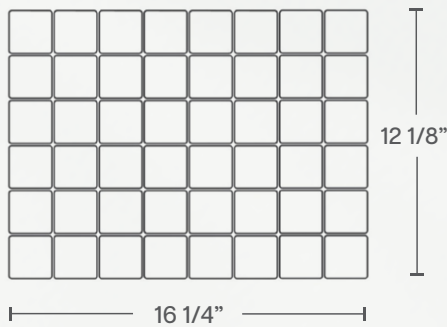

2" x 2" Straight Set

All dimensions are nominal.
One Piece = 1.40 sf
Thickness: 1/4"

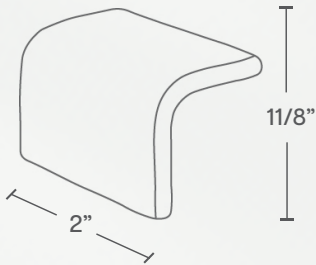

2" x 2" V Cap

All dimensions are nominal.
Piece per lf = 5.875
Thickness: 1/4"

Suggested Usage:



Interior
Wall



Shower
Wall



Exterior
Wall



Pool, Spa & Water
Feature



Suitable for
Freezing
Environments

Finish:

Gloss (G)

Our Story:

It began with a pebble and a crazy idea on a Balinese veranda in 1998 – a group of surfers who mounted natural pebbles to mesh and invented a whole new category of tile. Twenty-five years later, that adventurous spirit still drives us, from pebbles to ceramic, glass, porcelain, and stone. Others copied the idea and chased a lower price. We built expertise that lasts.

Our philosophy is simple: do great work, treat people right, and be the easiest company to do business with. We source the finest materials from all corners of the world, backed by 25+ years of supplier relationships and real in-house expertise. Real humans answer real questions here and we've been at it long enough to know the difference.



2 x 2" Straight Set - Salt Mist - Gloss



1"x 2" Offset - The Shallows - Gloss



2"x 2" Straight Set - Salt Mist - Gloss

Maris Collection


Available Colors



Salt Mist



The Shallows



Breaker

Product Details

Manufacturing

Maris is a fused glass tile with a durable surface finish that is permanently bonded at temperatures exceeding 1025°F.

Mounting

Maris mosaics are back-mounted with polyurethane or rubber dots, suitable for installation in submerged environments.

Sustainability

Maris is manufactured from 100% post-consumer recycled glass, contributing to sustainable building practices and potential LEED credits.

Installation & Handling

Install per the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation and vendor's glass tile or pool-specific installation instructions.

Minimum recommended grout joint for Maris tiles is 1/8" (3 mm).

Cutting

Maris can be cut using a wet saw with a high-quality, continuous-rim diamond blade designed for cutting glass tile.

DO NOT DRY CUT GLASS TILE WITH A POWER TOOL.

Sealing

No sealer is required.

Cleaning

Clean with a pH-neutral or mild alkaline tile cleaner.

Standards Compliance & Performance



Maris is manufactured for use in exterior freeze-thaw and submerged applications and is evaluated using recognized ANSI, ASTM, and ISO test methods applicable to glass tile performance. Based on these test results and intended-use classification criteria outlined in ANSI A137.2 – American National Standard Specifications for Glass Tile – Vendor designates Maris for wall and submerged applications and does not recommend it for floor use.

Test Results

TEST	ISO 10545-3	ISO 10545-9	ISO10545-11	ISO 10545-12	ISO 10545-13	ISO 10545-13	ISO 10545-13
Property	Water Absorption	Thermal Shock Resistance	Crazing Resistance	Frost Resistance	Chemical Resistance - Domestic Products	Chemical Resistance - Pool Water Additives	Chemical Resistance - Low Acid & Alkalis
Result	0.10%	Pass	Pass	Pass	Pass	Pass	Class A No Visible Effect
Comment	Impervious (<0.5%)	No Damage Observed	No Crazing Observed	Suitable for Freezing Environments	Resistant	Suitable for Pool & Spa Environments	High Resistance

TEST	ISO 10545-13	ISO 10545-14	DIN 51094	ASTM C1895	ANSI A137.2 Sec. 7.4	ANSI A137.2 Sec. 7.7	ANSI A326.3
Property	Chemical Resistance - High Acid & Alkalis	Stain Resistance	Color Stability	Mohs Surface Hardness	Aesthetic Class (Shade Variation)	Shear Bond Strength (Mounted Assembly)	Dynamic Coefficient of Friction (DCOF)
Result	Class A No Visible Effect	Class 5	Resistant; No change	4	V4	≥ 150 psi (dry) ≥ 100 psi (wet)	> 0.42
Comment	High Resistance	Surface Unaffected	Stable under Light Exposure	Surface Hardness Reference	Substantial Variation	Meets ANSI A137.2 minimum shear bond requirements for glass tile	Provided for reference only; Maris is not intended for floor use

Patterns (Available in all colors)

MOSAIC TILE*	Pattern	Finish	Sheet Size (in)	Sheet Size (mm)	Coverage Per Sheet	lbs/box	pcs/box
	2" x 2" Straight Set	Gloss	12 1/8" x 16 1/4" x 1/4"	310 x 415 x 5.5 mm	1.40 sf	16.75	5
	1" x 2" Offset	Gloss	12 1/8" x 10 1/8" x 1/4"	310 x 256 x 5.5 mm	0.85 sf	12	6

TRIM TILE	Pattern	Finish	Tile Size (in)	Tile Size (mm)	Pieces Per Linear Foot	lbs/box	pcs/box
	V-Cap	Gloss	2" x 1 1/8" x 1/4"	50 x 28 x 5.5 mm	5.875	6.72	96

*back mounted

Suggested Usage (per ANSI A137.2 wall/submerged classification)


Interior Wall


Shower Wall


Exterior Wall


Pool, Spa & Water Feature


Suitable for Freezing Environments

Confirm complete product specifications at IslandStone.com

Limitations

Maris tiles are not intended for floor usage.

Warranty

Vendor warrants Maris glass tile for a period of one (1) year from the date of purchase against manufacturing defects under normal use and service. For full warranty terms and conditions, ask your Facings of America Design Consultant for more information.