

# RHYTHM



EST 1967

## FACINGS

OF AMERICA

# Rhythm

1 - 3/4" x 3"


1 sheet = 0.97 sq.ft. / 19.4 sq.ft. per box




RTM-1  
Silky White



RTM-3  
Fawn

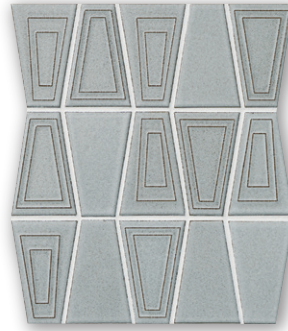

RTM-4  
Stone Grey

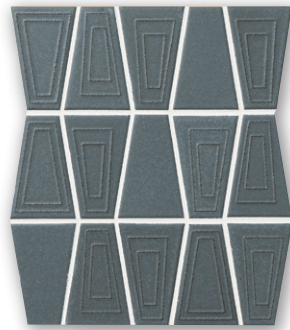

RTM-5  
Steel Blue



RTM-6  
Bronze

**Note** Wide shade variation inherent in this series.

Random blends can be created on a custom order basis by using up to three colors.

Please note the ratio is 25% Flat to 75% Pattern and this ratio cannot be altered.

Please also note this series cannot be mounted as Flat or Pattern only.

General lead time for custom order is approximately 45 to 90 days.

Minimum order quantity is one box. Full box quantities only.

Please note that mesh mounted product sheets should NEVER be placed directly on the wet saw for cutting.

If cuts are required, pieces should be removed from the mesh and cut individually to avoid the glue releasing from the mesh, prior to completion of installation. The sheets should also NOT be exposed to moisture prior to installation.



# RHYTHM


1 3/4" x 3"

For those who dance to the beat of their own drum, these funky trapezoids are destined to delight and inspire.

Please note that this series cannot be mounted as Flat or Pattern only. The ratio is 25% Flat to 75% Pattern per sheet and this ratio cannot be altered.

Personalized designs, patterns and random blends of up to three colors are available on a custom order basis.

Please contact your Cepac representative for additional information and pricing.

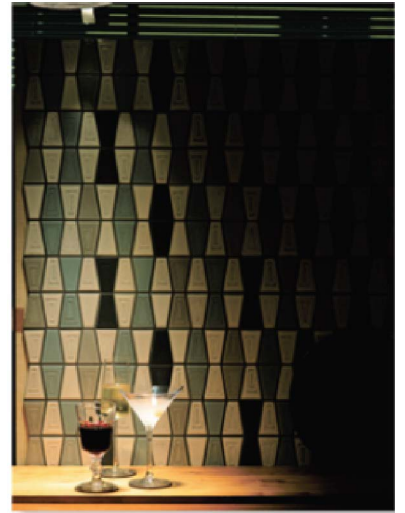

## RECOMMENDED AREAS OF USE

With regard to the durability of the bisque and glaze, this material is suitable for:

- Fireplace surround and firebox
- All interior wall applications - residential and commercial
- All exterior wall applications - residential and commercial including building facades, swimming pools, fountains, outdoor kitchens and regions that experience extreme weather conditions, subject to the method of installation

## INSTALLATION METHOD

- Please refer to the TCNA handbook for installation method: <http://www.tcnatile.com/>
- Always inspect material prior to installation, for color, shade, size, mounting and any other deciding factors as installed material cannot be accepted for return or credit. Use signifies acceptance.
- Please note that mesh mounted goods should never be placed directly on the wet saw for cutting. If cuts are required, pieces should be removed from the mesh and cut individually to avoid the glue releasing from the mesh.
- Material can be cleaned with any mild nonabrasive household cleaning product due to the chemical resistant nature of the glaze.

## TECHNICAL DATA

- Japanese Porcelain - fired at approx. 2300° Fahrenheit
- Chemical Resistant
- Frost Proof - *subject to method of installation*
- Water absorbency
  - Bisque less than 1%
  - Glazed surface 0%
- TCNA- MOH's Scale Rating 7
- TCNA - DCOF Average rating not applicable
- Mesh mounted: 1 sheet= 0.97 sq. ft./ 19.4 sq. ft. per box
- Sheet size: nominal 12" x 11.5"
- Weight: 2.25 lbs. per sheet / 46 lbs. per box
- Thickness: 1/4"
- Pre-consumer recycled content - 52%

Variations of shade are inherent characteristics of all kiln fired products. To ensure satisfaction, please visually inspect all merchandise prior to installation, as use signifies acceptance.

We will endeavor to resolve any issues that may arise with material purchased prior to installation.