

SOLID

— EST 1967 —

FACINGS

—

OF AMERICA

SOLID

A new geometry in perfect balance.

A tool to allow freedom of design through an elegant range of colours in 5 modular sizes.


Pushing the boundaries, the key ingredients are: porcelain, rectified, coloured through body and its modularity as the inspiration for efficient design.

Innovative and combinable in an infinite number of ways.

01. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	pag. 6
02. GET INSPIRED / INSPIRATE	pag. 8
03. LAYOUTS / COLOCACIONES	pag. 37
04. RECOMMENDATIONS / RECOMENDACIONES	pag. 42
05. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	pag. 43
06. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	pag. 44
07. PACKING	pag. 45



SOLID

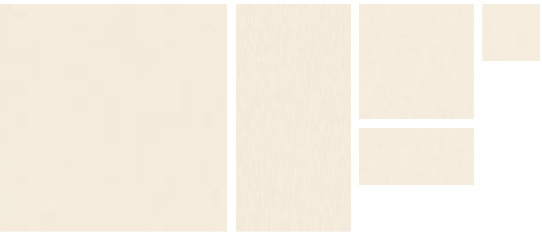

Chalk



Cotto



Ash



Sky




Moss



Basalt

FORMATS



XL
25x25cm /
10"X10"



L
12,5x25cm /
5"X10"




M
12,5x12,5cm /
5"X5"




S
6,2x12,5cm /
2.5"X5"



XS
6,2x6,2cm /
2.5"X2.5"

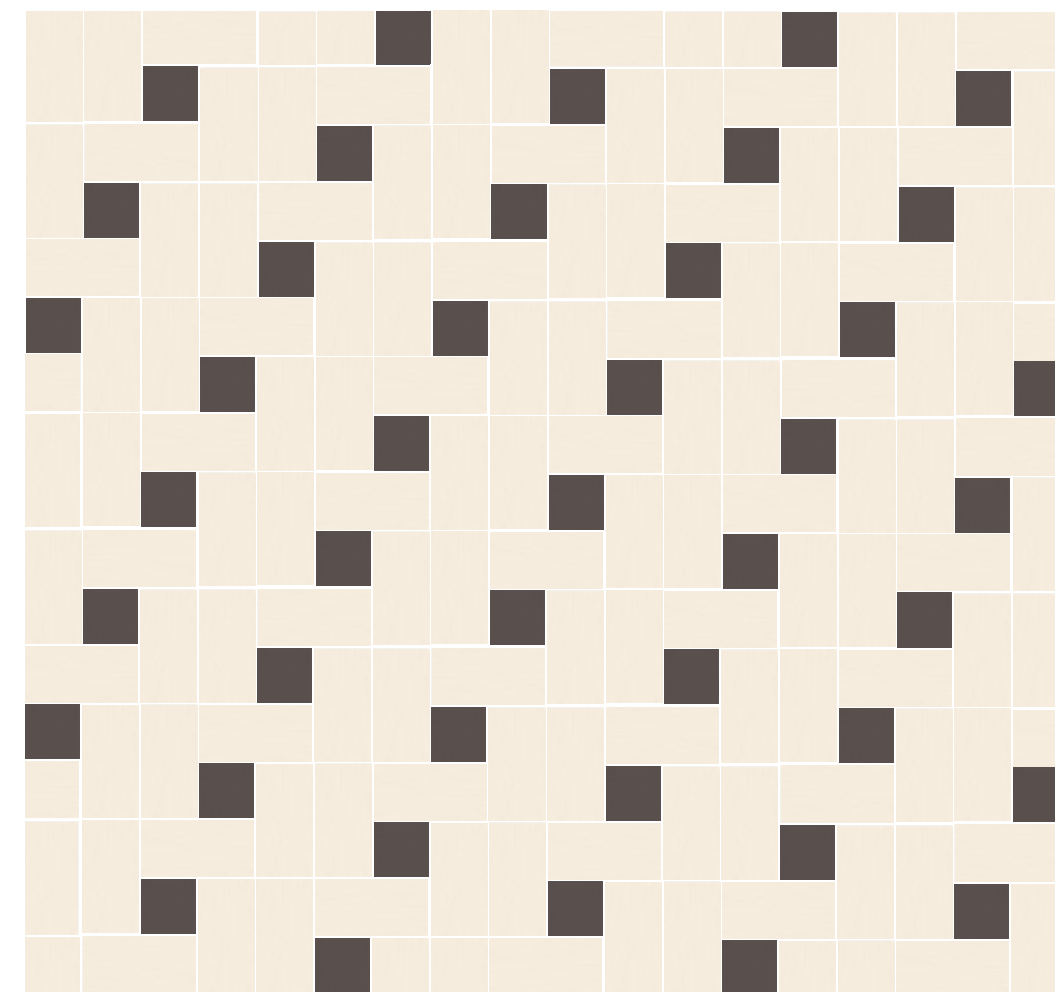


Solid S Chalk - 86%
Solid XS Basalt - 14%

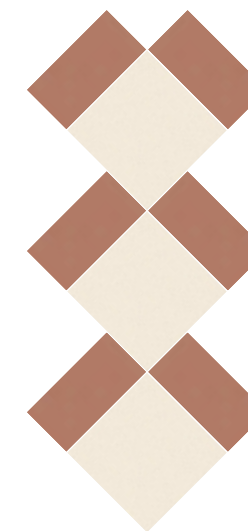


Wall tiles:
***Solid S Chalk* - 14%**
***Solid XS Cotto* - 86%**

Floor tiles:
***Solid S Cotto* - 50%**
***Solid M Chalk* - 50%**

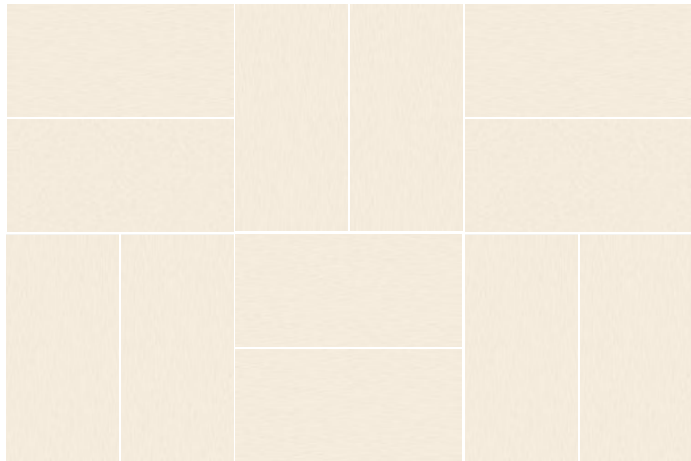


Solid L Chalk - 100%

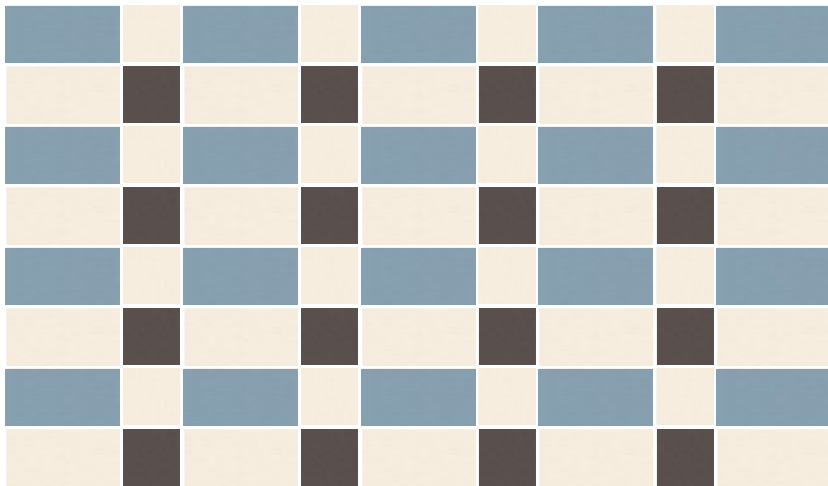

Solid XS Chalk - 17% & Basalt - 17%
Solid S Sky - 33% & Chalk - 33%



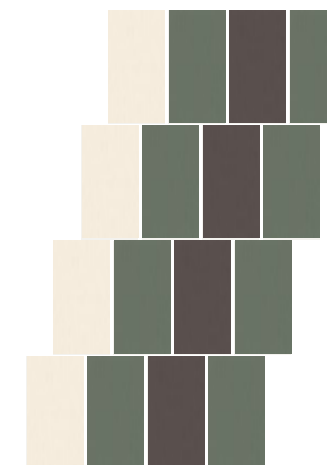


Wall tiles:
Solid S Moss - 100%


Floor tiles:
Solid S Moss - 50%
Chalk - 25% & Basalt - 25%




Floor tiles:
Contempo Strip Natural
(Love Affairs Collection)

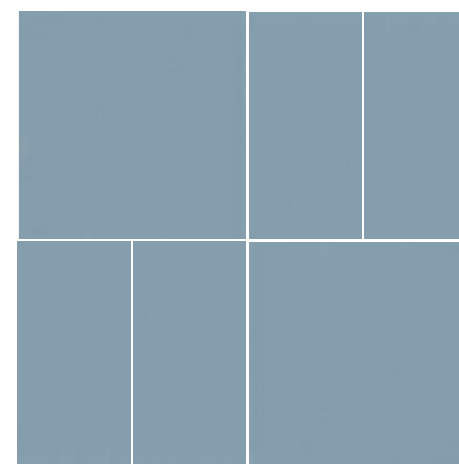

Solid XL Sky - 50%
Solid L Sky - 50%

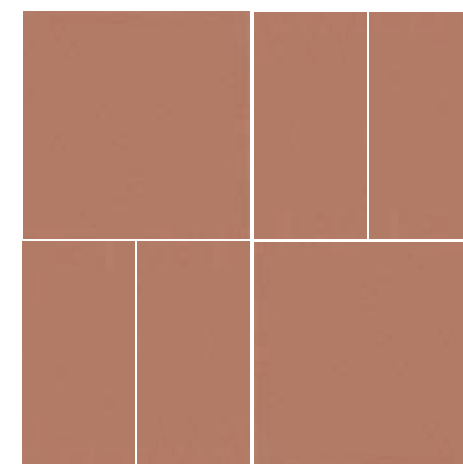

Solid XL Cotto - 50%
Solid L Cotto - 50%

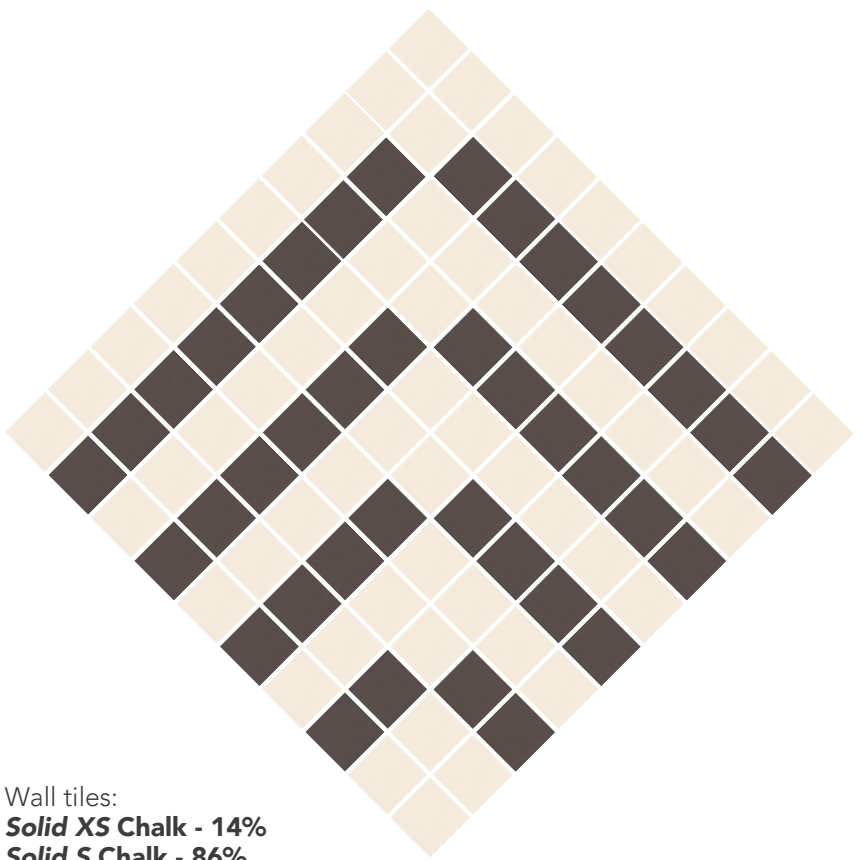

Wall tiles:
Solid XS Chalk - 14%
Solid S Chalk - 86%

Floor tiles:
Solid XS Chalk - 60%
& **Basalt** - 40%

Bar tiles:
Moon Graphite Matt
(Wow Collection)







Solid XL Cotto - 89%
Solid S Basalt - 11%



Solid XS Moss - 12,5% & Cotto - 12,5%
Solid S Moss - 50% & Chalk - 25%

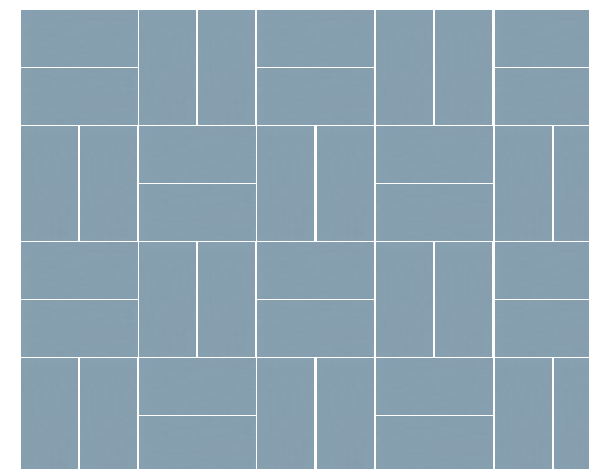

Solid S Sky - 100%

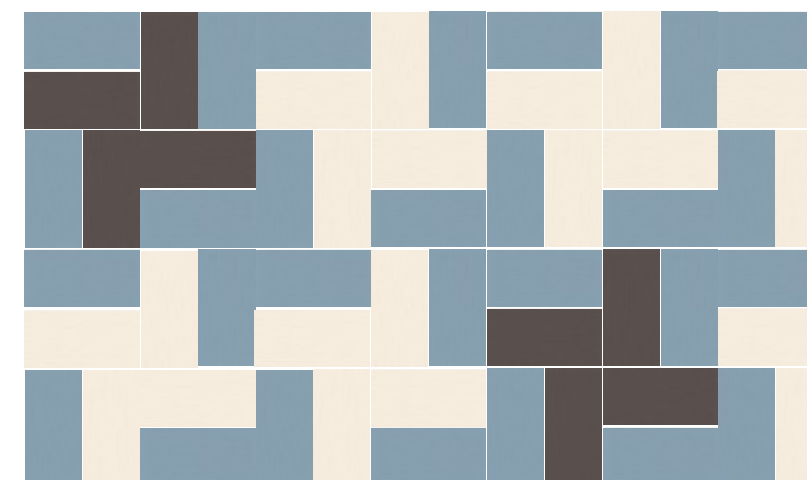


Solid S Sky - 50%, Chalk - 36% & Basalt - 14%




Wall tiles:
Solid L Ash - 50%
Solid XL Ash - 50%


Floor tiles:
Solid L Ash - 25% & Moss 25%
Solid XL Chalk - 50%

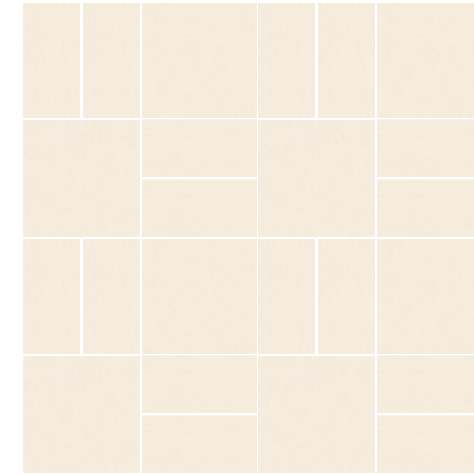


Solid M Chalk - 50%
Solid S Chalk - 50%

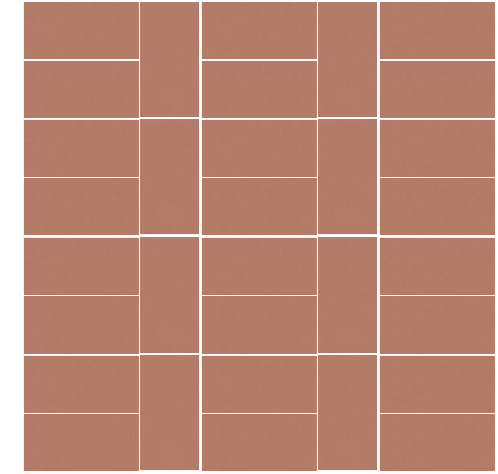


Solid S Cotto - 100%

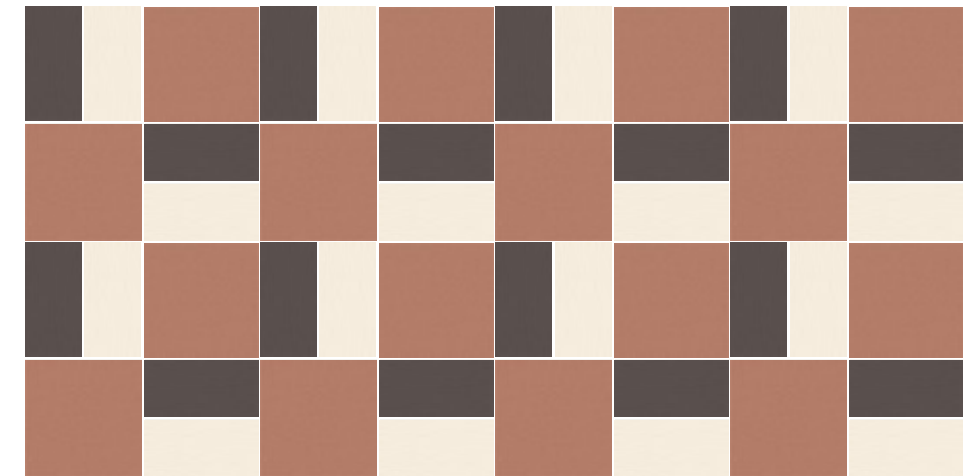

Solid M Cotto - 50%
Solid S Chalk - 25% & Basalt - 25%

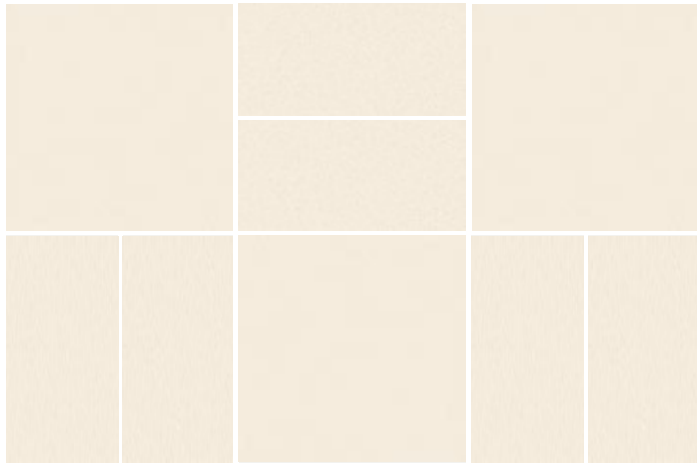


Solid XL Chalk - 50%
Solid L Chalk - 50%

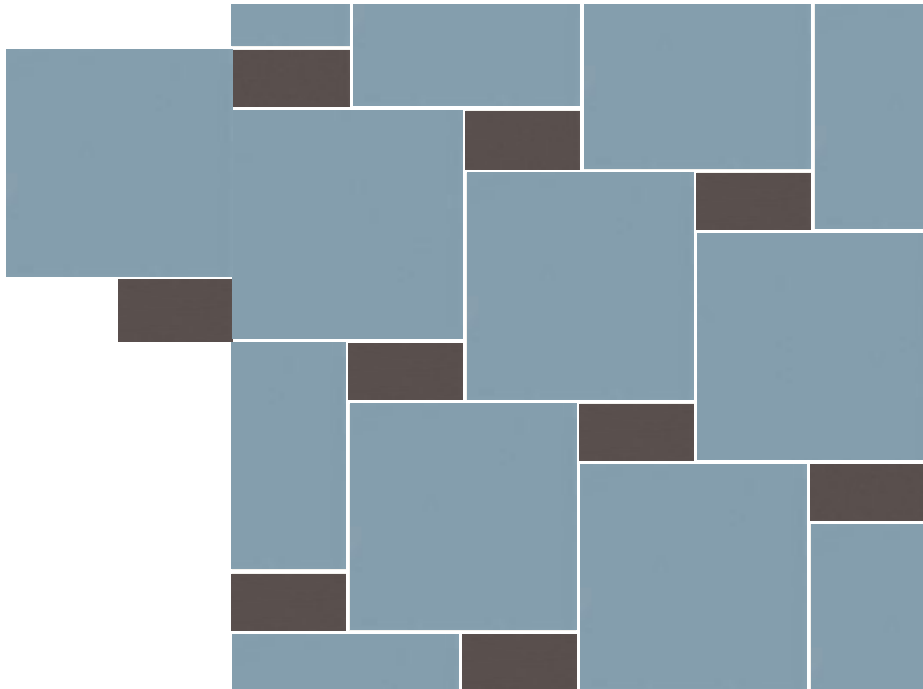


Solid XL Sky - 89%
Solid S Basalt - 11%




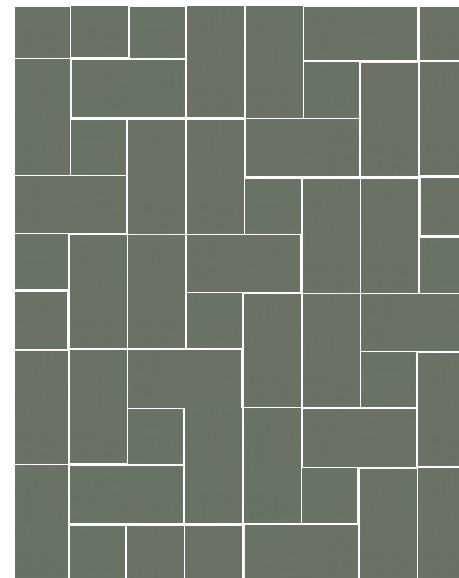


Solid S Moss - 86%
Solid XS Moss - 14%

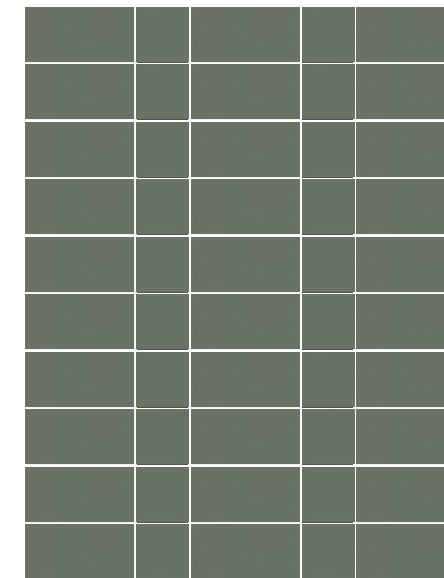

Solid S Moss - 67%
Solid XS Moss - 33%

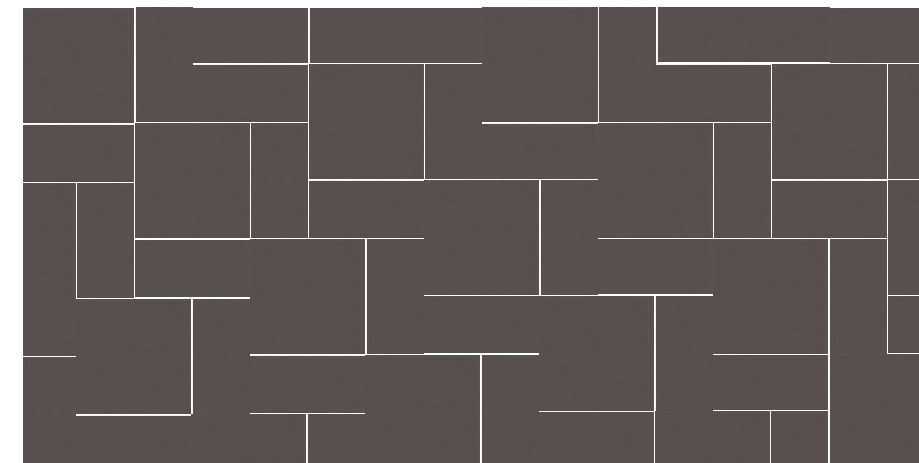


Solid M Basalt - 50%
Solid S Basalt - 50%

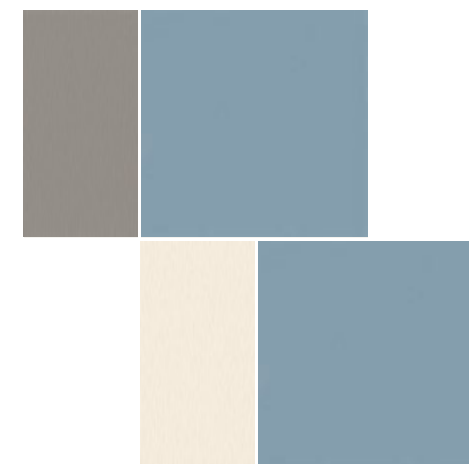


Wall tiles:
Solid L Chalk - 16,5% & Ash - 16,5%
Solid XL Sky - 67%


Other tiles:
Contempo Strip Natural
(Love Affairs Collection)

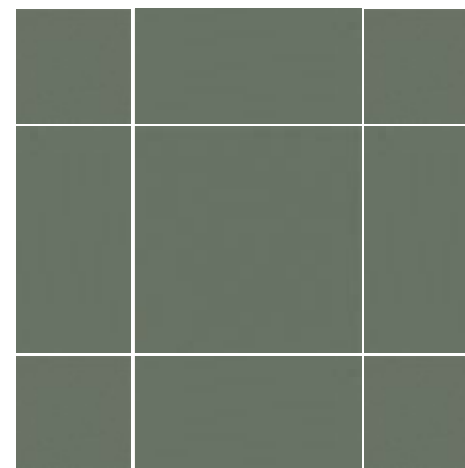

Solid XL Moss - 25%
Solid L Moss - 50%
Solid M Moss 25%

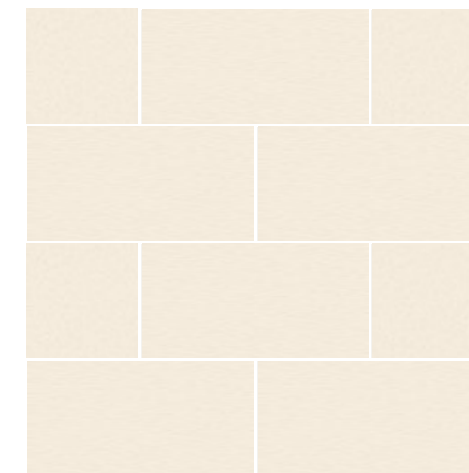

Solid L Chalk 100%

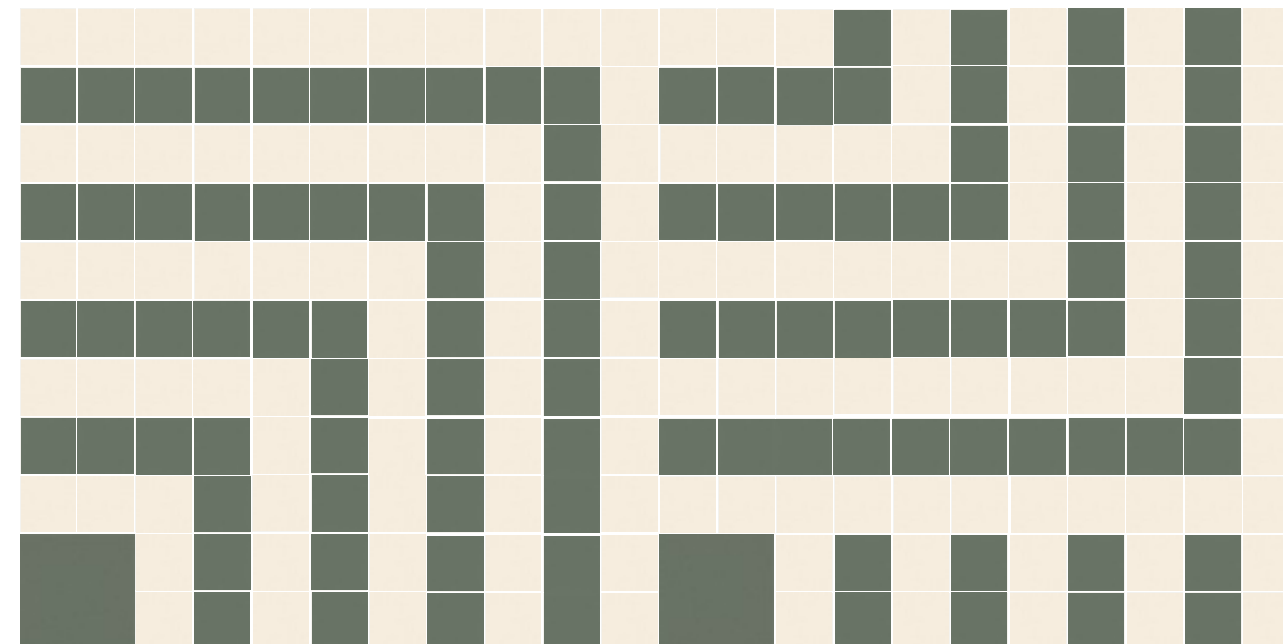


Solid M Moss - 3,5%
Solid XS Moss - 43% & Chalk - 53,5%




Solid XL Sky - 25%
Solid L Basalt - 50%
Solid M Chalk 25%

UNLIMITED COMPOSITIONS

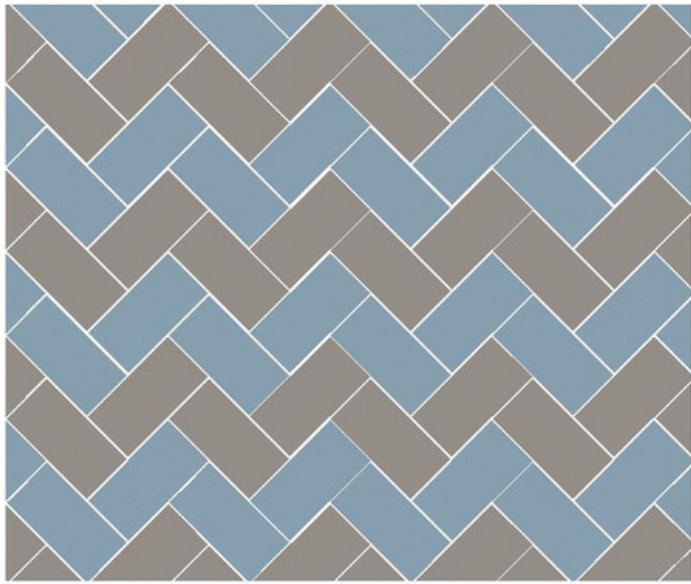


Solid S Ash - 50%
Solid S Sky - 50%

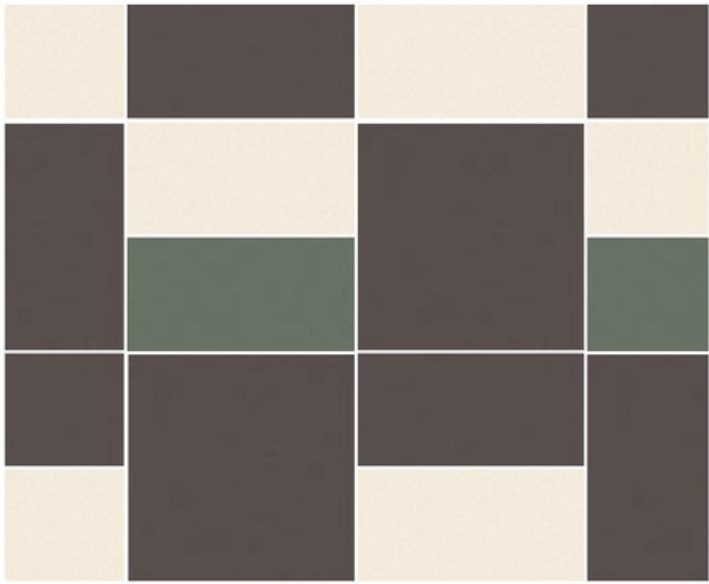


Solid S Chalk - 25%, Basalt - 12,5% & Moss - 12,5%
Solid M Basalt - 50%




Solid XS Chalk - 60%
Basalt - 36% & Cotto 4%

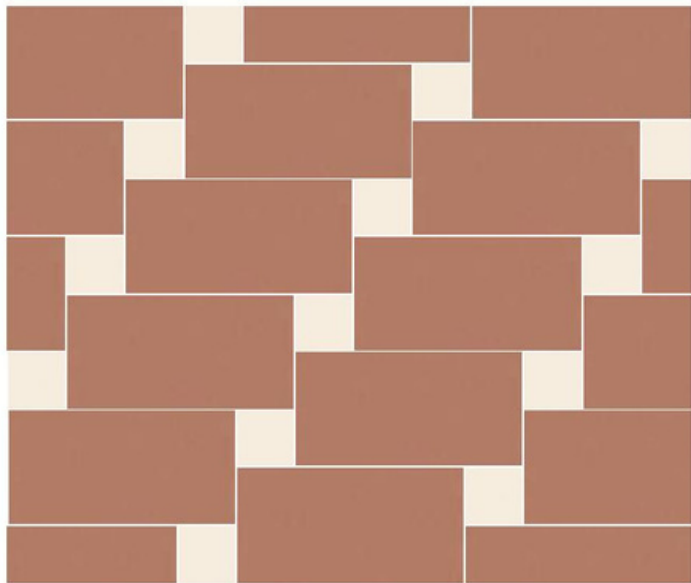


Solid L Cotto - 80%
Solid XS Chalk - 20%

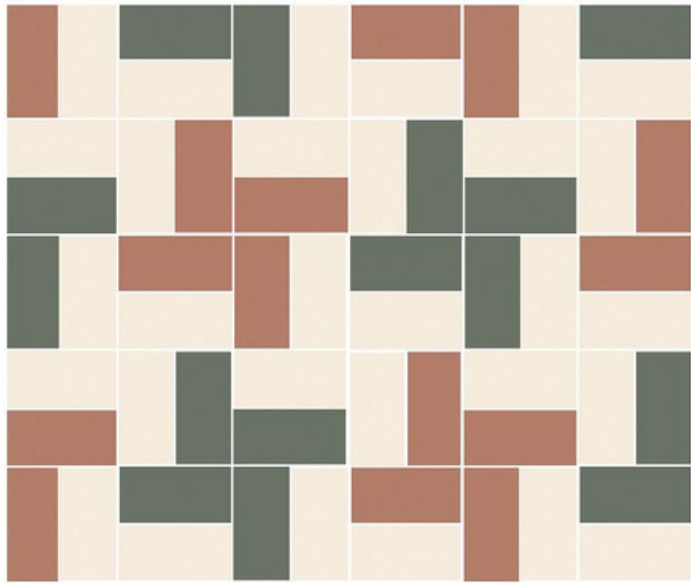


Solid S Chalk - 50%, Cotto - 25% & Moss - 25%

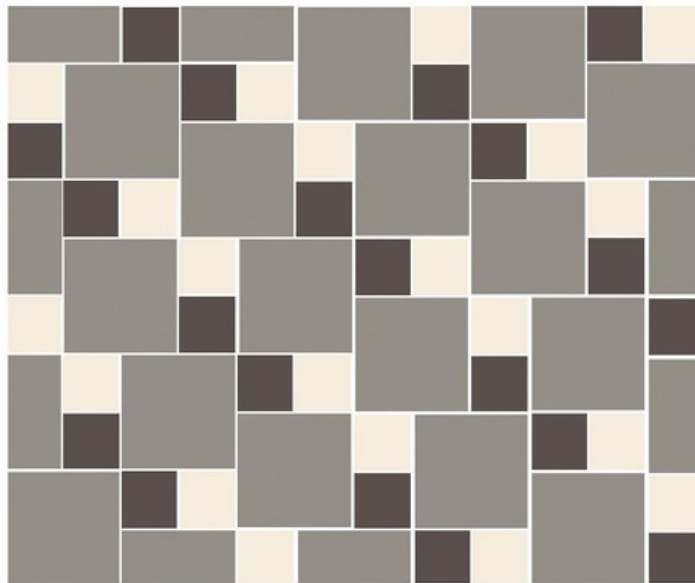


Solid M Ash - 77%
Solid XS Chalk - 16,5% & Basalt - 16,5%

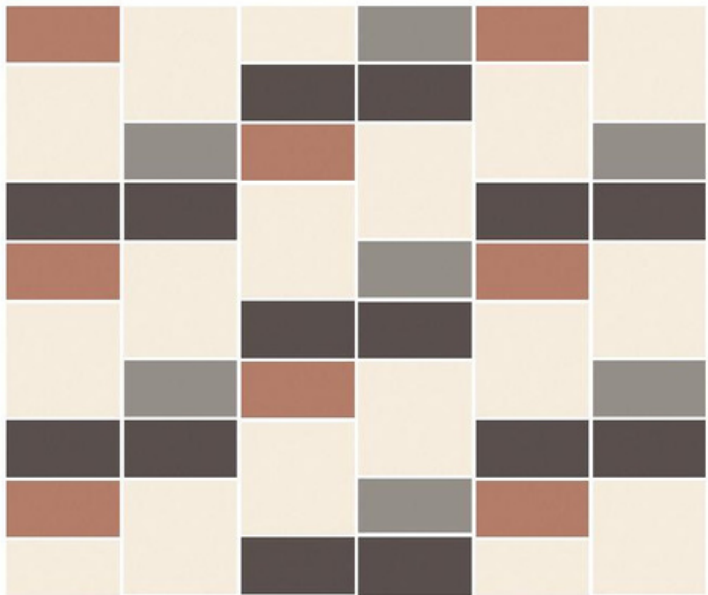


Solid M Chalk - 50%
Solid S Basalt - 25%, Cotto - 12% & Ash - 12%

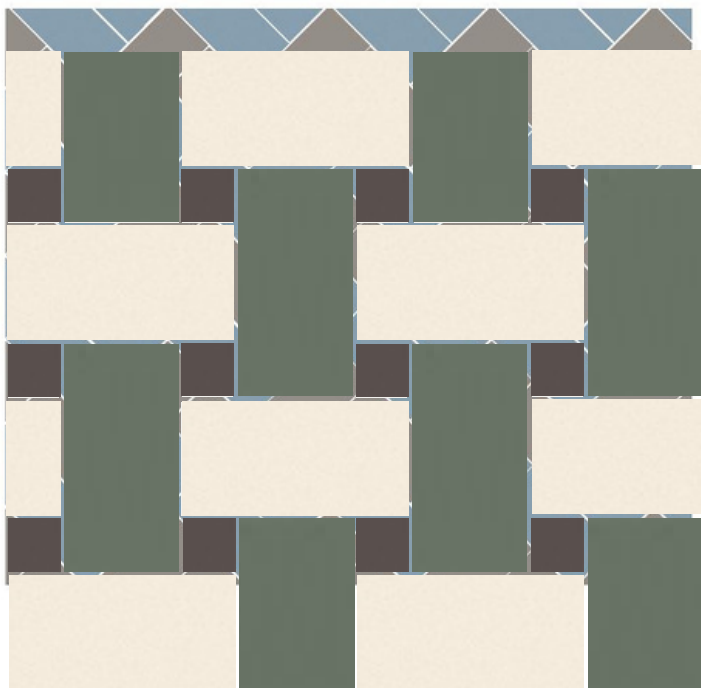

Solid L Chalk - 44% & Moss - 44%
Solid XS Basalt - 12%

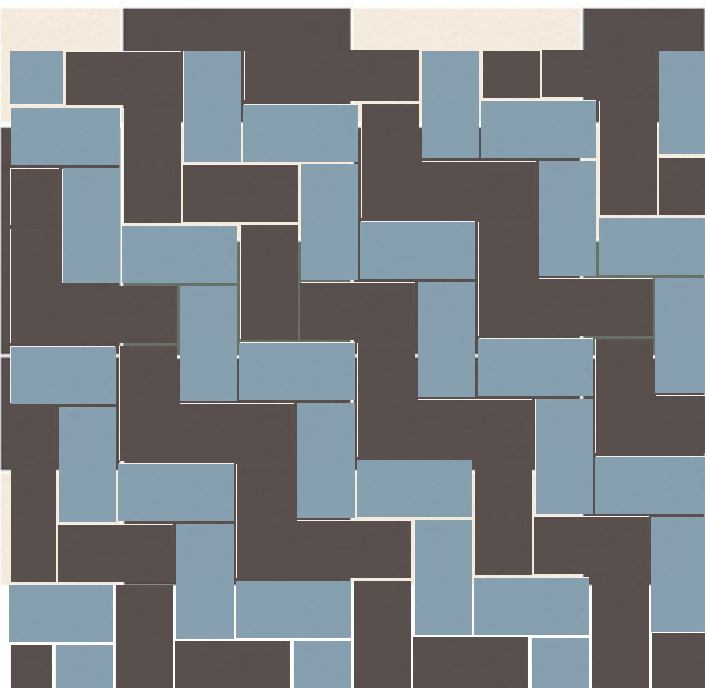


Solid S Basalt - 50% & Sky - 50%

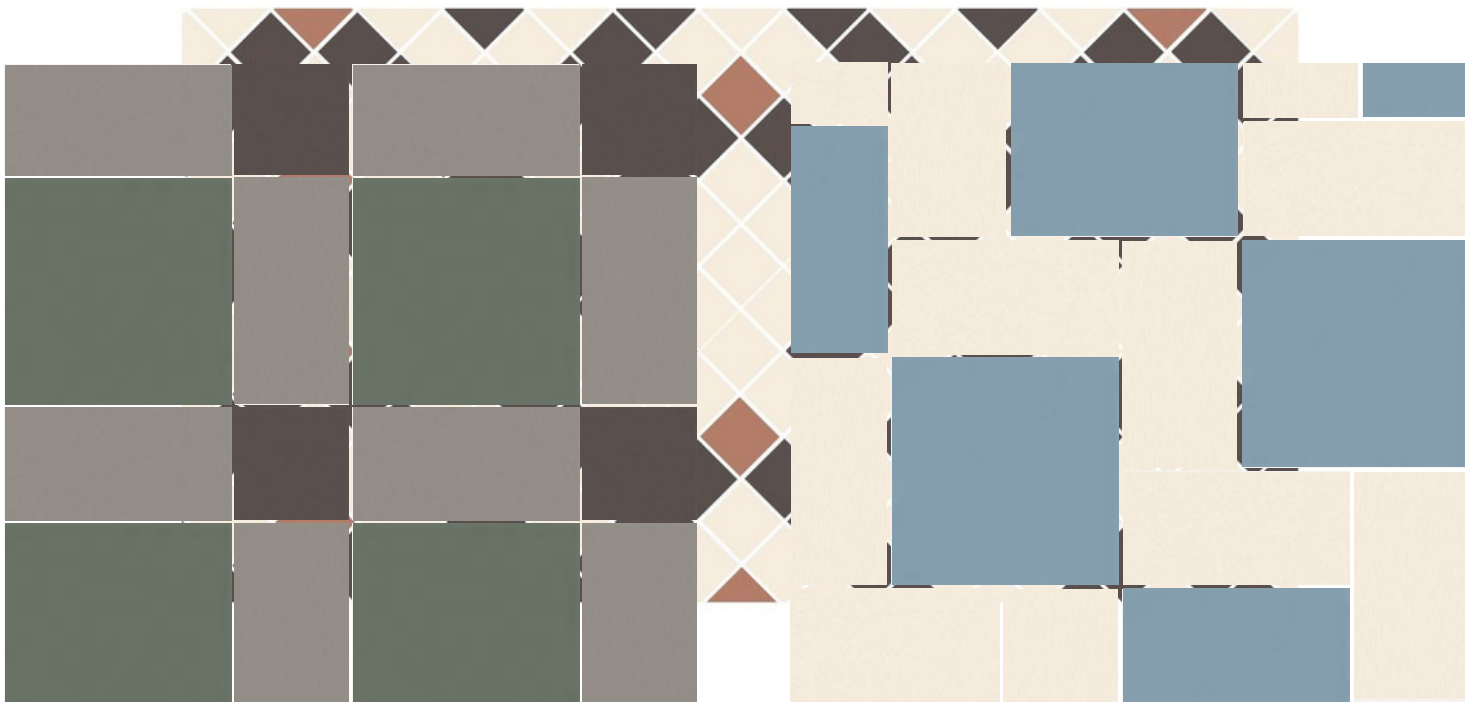


Solid XL Moss - 44%
Solid L Ash - 44%
Solid M Basalt - 12%


Solid XL Sky - 50%
Solid L Chalk - 50%

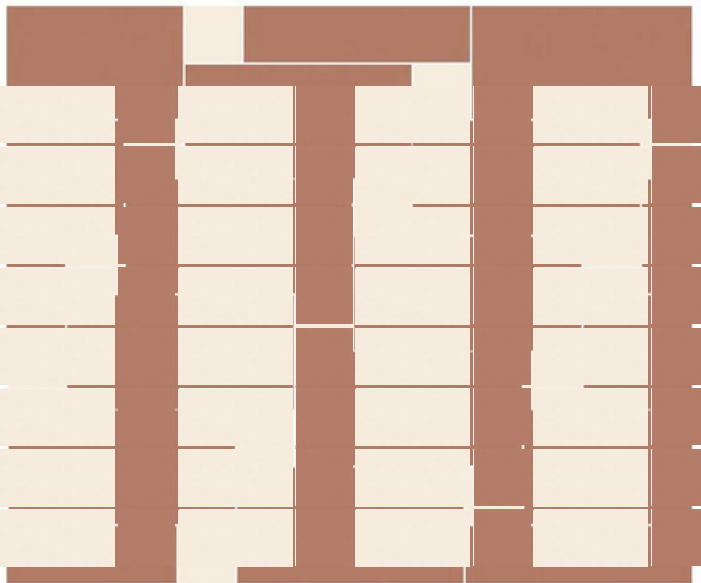


Solid S Chalk - 66,6%
Solid XS Cotto - 33,3%

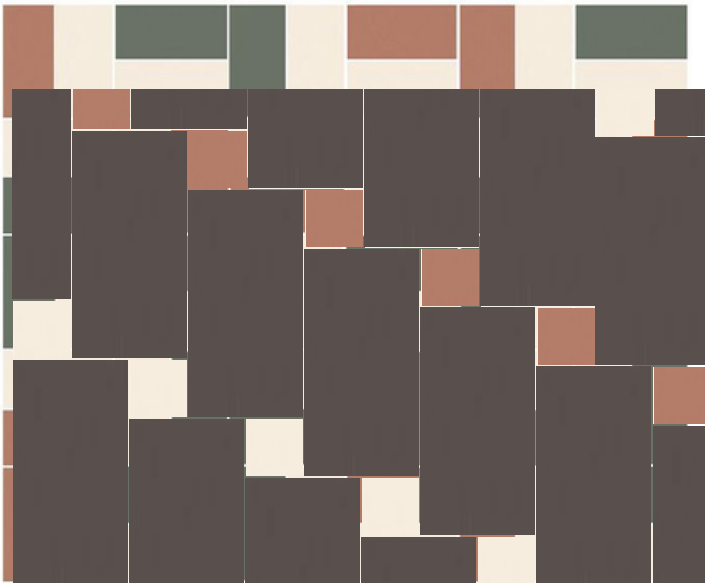

Solid L Basalt - 80%
Solid XS Cotto - 10% & Chalk - 10%

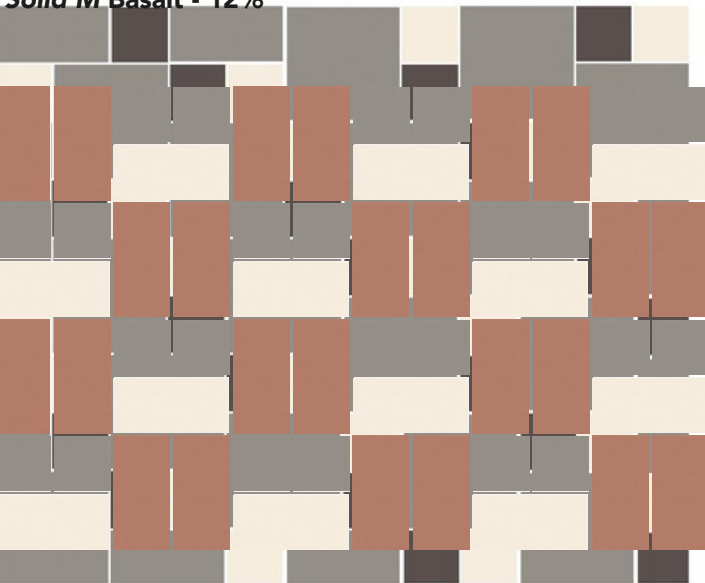

Solid S Cotto - 50% & Chalk - 25%
Solid XS Ash - 25%

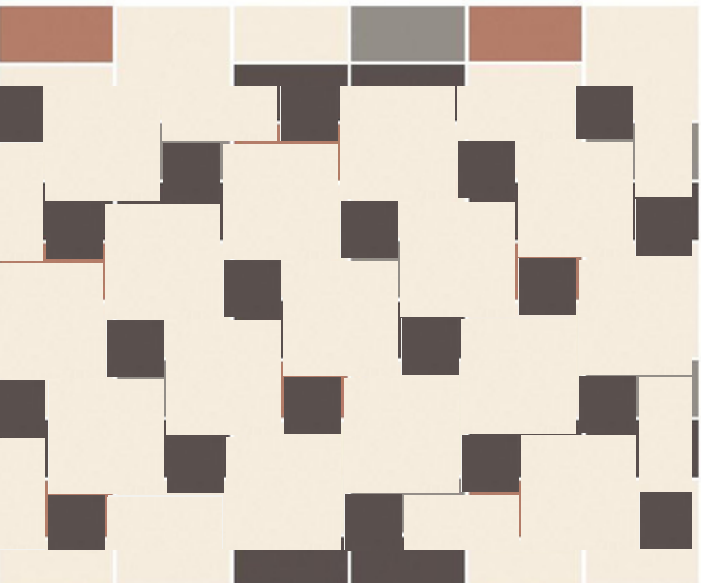

Solid M Chalk - 80%
Solid XS Basalt - 20%

ALMACENAMIENTO

Paragarantizar lascaracterísticas de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Paragarantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Todos los formatos de esta colección son modulares y combinables entre si. Para un resultado óptimo recomendamos usar 1,5 mm de junta.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puestaen obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

Toensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. All formats in this collection are modular and combinable with each other. For an optimal result we advise to use 1,5 mm (0.06”) grout.


MAINTENANCE AND CLEANING

Once thematerialshave been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

Dry-pressed ceramic tiles whith water absorption B la ≤ 0,5% for interior and exterior floors and walls.
Baldosas cerámicas prensadas en seco con absorción de agua B la ≤ 0,5% para suelos y paredes interiores y exteriores.

FEATURES / C AR AC TERÍS TIC A S		SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	XL: 251,5mm +/- 0,6 % x 251,5mm +/- 0,6 % x 8,5 mm+/- 5 % L: 251,5mm +/- 0,6 % x 125mm +/- 0,9 mm x 8,5 mm+/- 5 % M: 125mm +/- 0,9 mm x 125mm +/- 0,9 mm x 8,5 mm+/- 5 % S: 125mm +/- 0,9 mm x 61,75mm +/- 0,9 mm x 8,5 mm+/- 5 % XS: 61,75mm +/- 0,9 mm x 61,75mm +/- 0,9 mm x 8,5 mm+/- 5 %	UNE-EN ISO 10545-2:1998
	Water absorption	E _b ≤ 0,5%	UNE-EN ISO 10545-3:1997
	Modulus of rupture	Minimum 35 N/mm2 Individual Minimum 32 N/mm2	UNE-EN ISO 10545-4:2012
	Resistance to deep abrasion	< 175 mm3	UNE-EN ISO 10545-7:1999
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Frost resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	>3	UNE-EN ISO 10545-14:1998
	Non-slip value	R10 / CLASS 2 DCOF >0,42	DIN 51130:2014 ANSI A137.1:2012

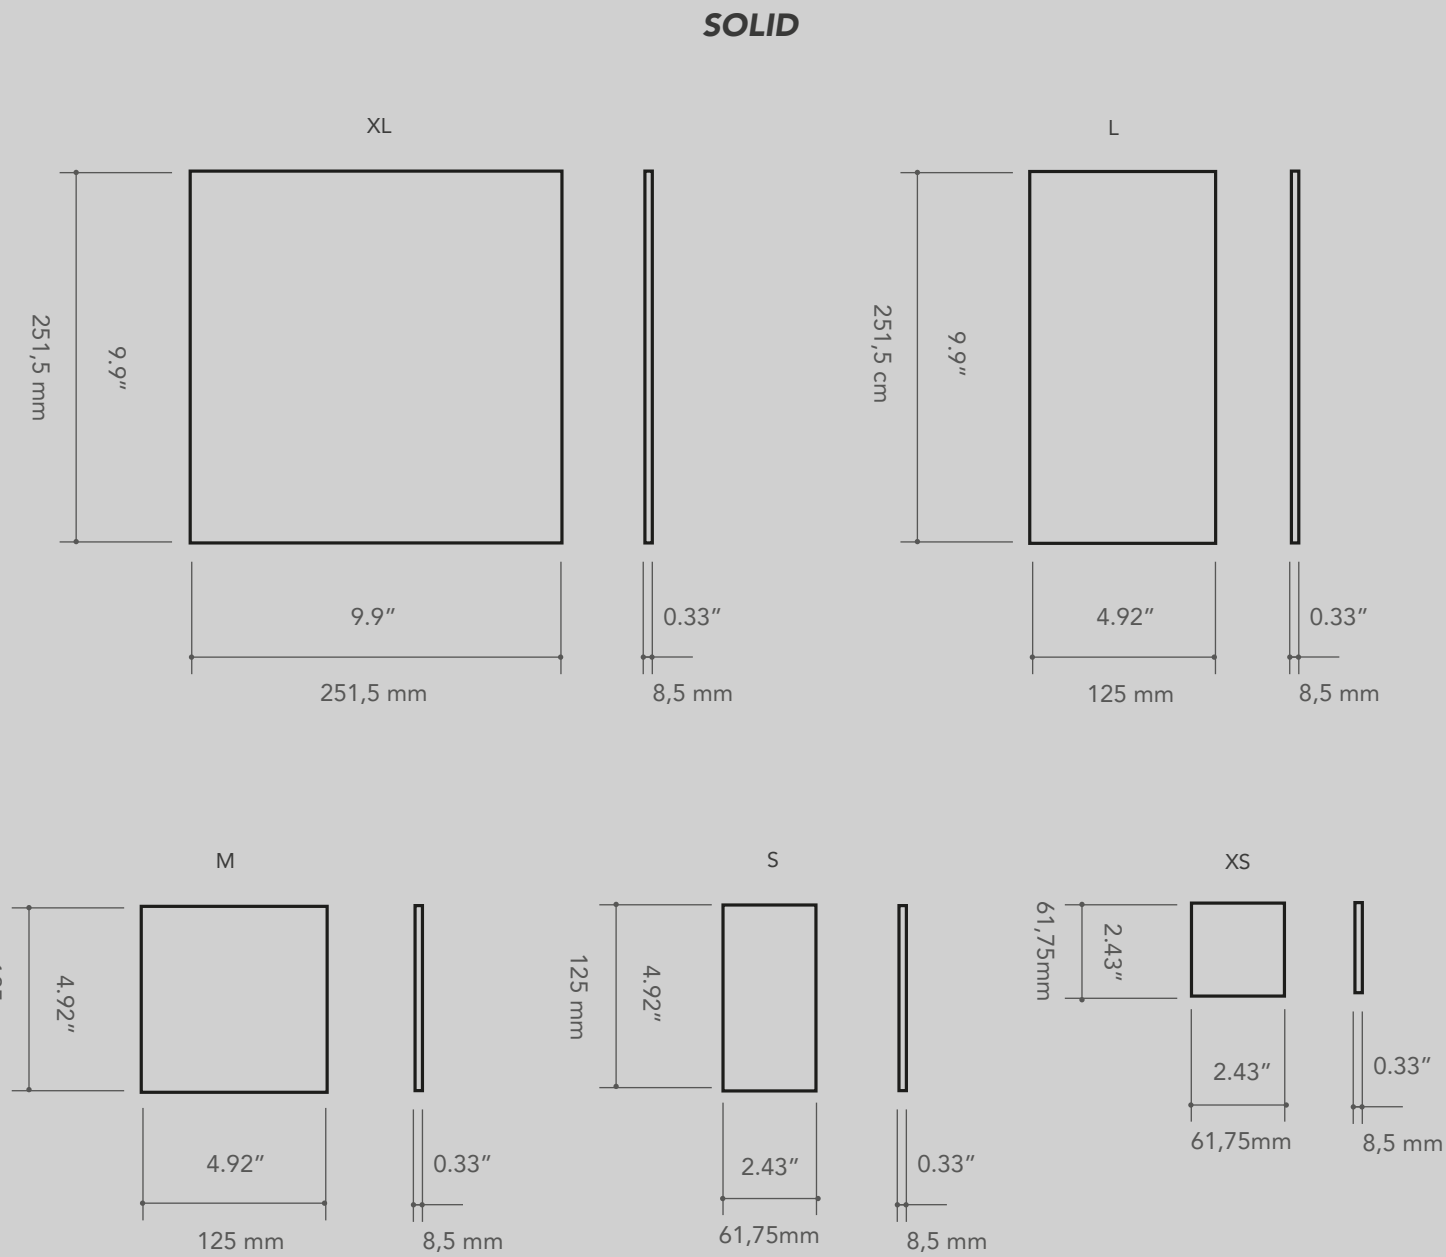

Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Solid XS	2.5"x2.5"	112	17.55 lb	4.607 sq ft	90	414.630 sq ft
Solid S	2.5"x5"	56	18.01 lb	4.661 sq ft	90	419.490 sq ft
Solid M	5"x5"	39	25.29 lb	6.555 sq ft	90	589.950 sq ft
Solid L	5"x10"	40	51.70 lb	13.541 sq ft	48	649.968 sq ft
Solid XL	10"x10"	20	52.84 lb	13.616 sq ft	48	653.568 sq ft

Modelo Model	Tamaño (cm) Size (cm)	Piezas/caja Pieces/box	Kg/caja kg/box	m2/caja m2/box	Cajas/palet Box/pallet	m2/palet m2/palle
Solid XS	6,2x6,2 cm	112	7,95 kg	0,428 m2	90	38,520 m2
Solid S	6,2x12,5 cm	56	8,17 kg	0,433 m2	90	38,970 m2
Solid M	12,5x12,5 cm	39	11,47 kg	0,609 m2	90	54,810 m2
Solid L	12,5x25 cm	40	23,45 kg	1,258 m2	48	60,384 m2
Solid XL	25x25 cm	20	23,97 kg	1,265 m2	48	60,720 m2



— EST 1967 —

FACINGS

— OF AMERICA —