

TEXTURE

— EST 1967 —

FACINGS

OF AMERICA



TEXTURE

01. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	pag. 4
02. GET INSPIRED / INSPIRATE	pag. 8
03. RECOMMENDATIONS / RECOMENDACIONES	pag. 36
04. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	pag. 37
05. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	pag. 39
06. PACKING	pag. 39
07. PRICE CODE	pag. 39



TEXTURE

6,2x25cm / 2.5"x10"



Dove
W07




Grey
W07




Sage
W07




Cotto
W07



Garnet
W07




Ocean
W07




Pearl
W10

TEXTURE PATTERN MIX

6,2x25cm / 2.5"x10"




Dove
W12




Grey
W12



Sage
W12



Cotto
W12



Garnet
W12



Ocean
W12






Pearl
W21

COMPLEMENTARY PIECES / PIEZAS COMPLEMENTARIAS



TEXTURE EDGE
0.31" x 9.8" / 0,8 x 25 cm
WS3

* Available in all Texture Colours
* Disponible en todos los colores de Texture

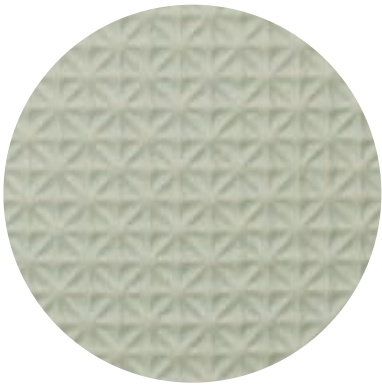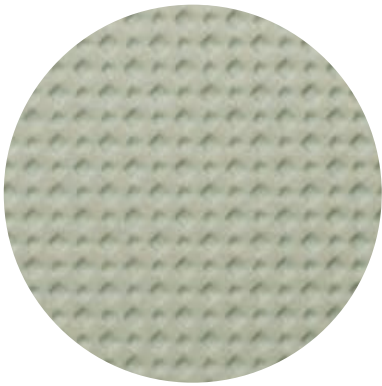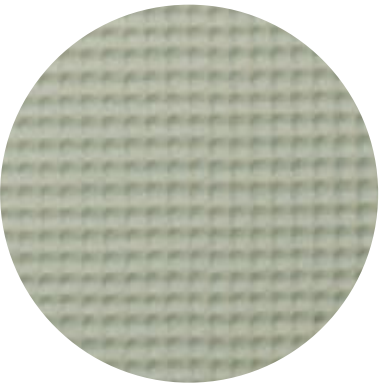

*9 different patterns randomly mixed within the box
*9 diseños diferentes encajados aleatoriamente

TEXTURE PATTERN MIX
6,2x25cm / 2.5"x10"




Alabaster
W21



Brass
W21



Bronze
W21




Cooper
W21



Silver
W21



Pewter
W21

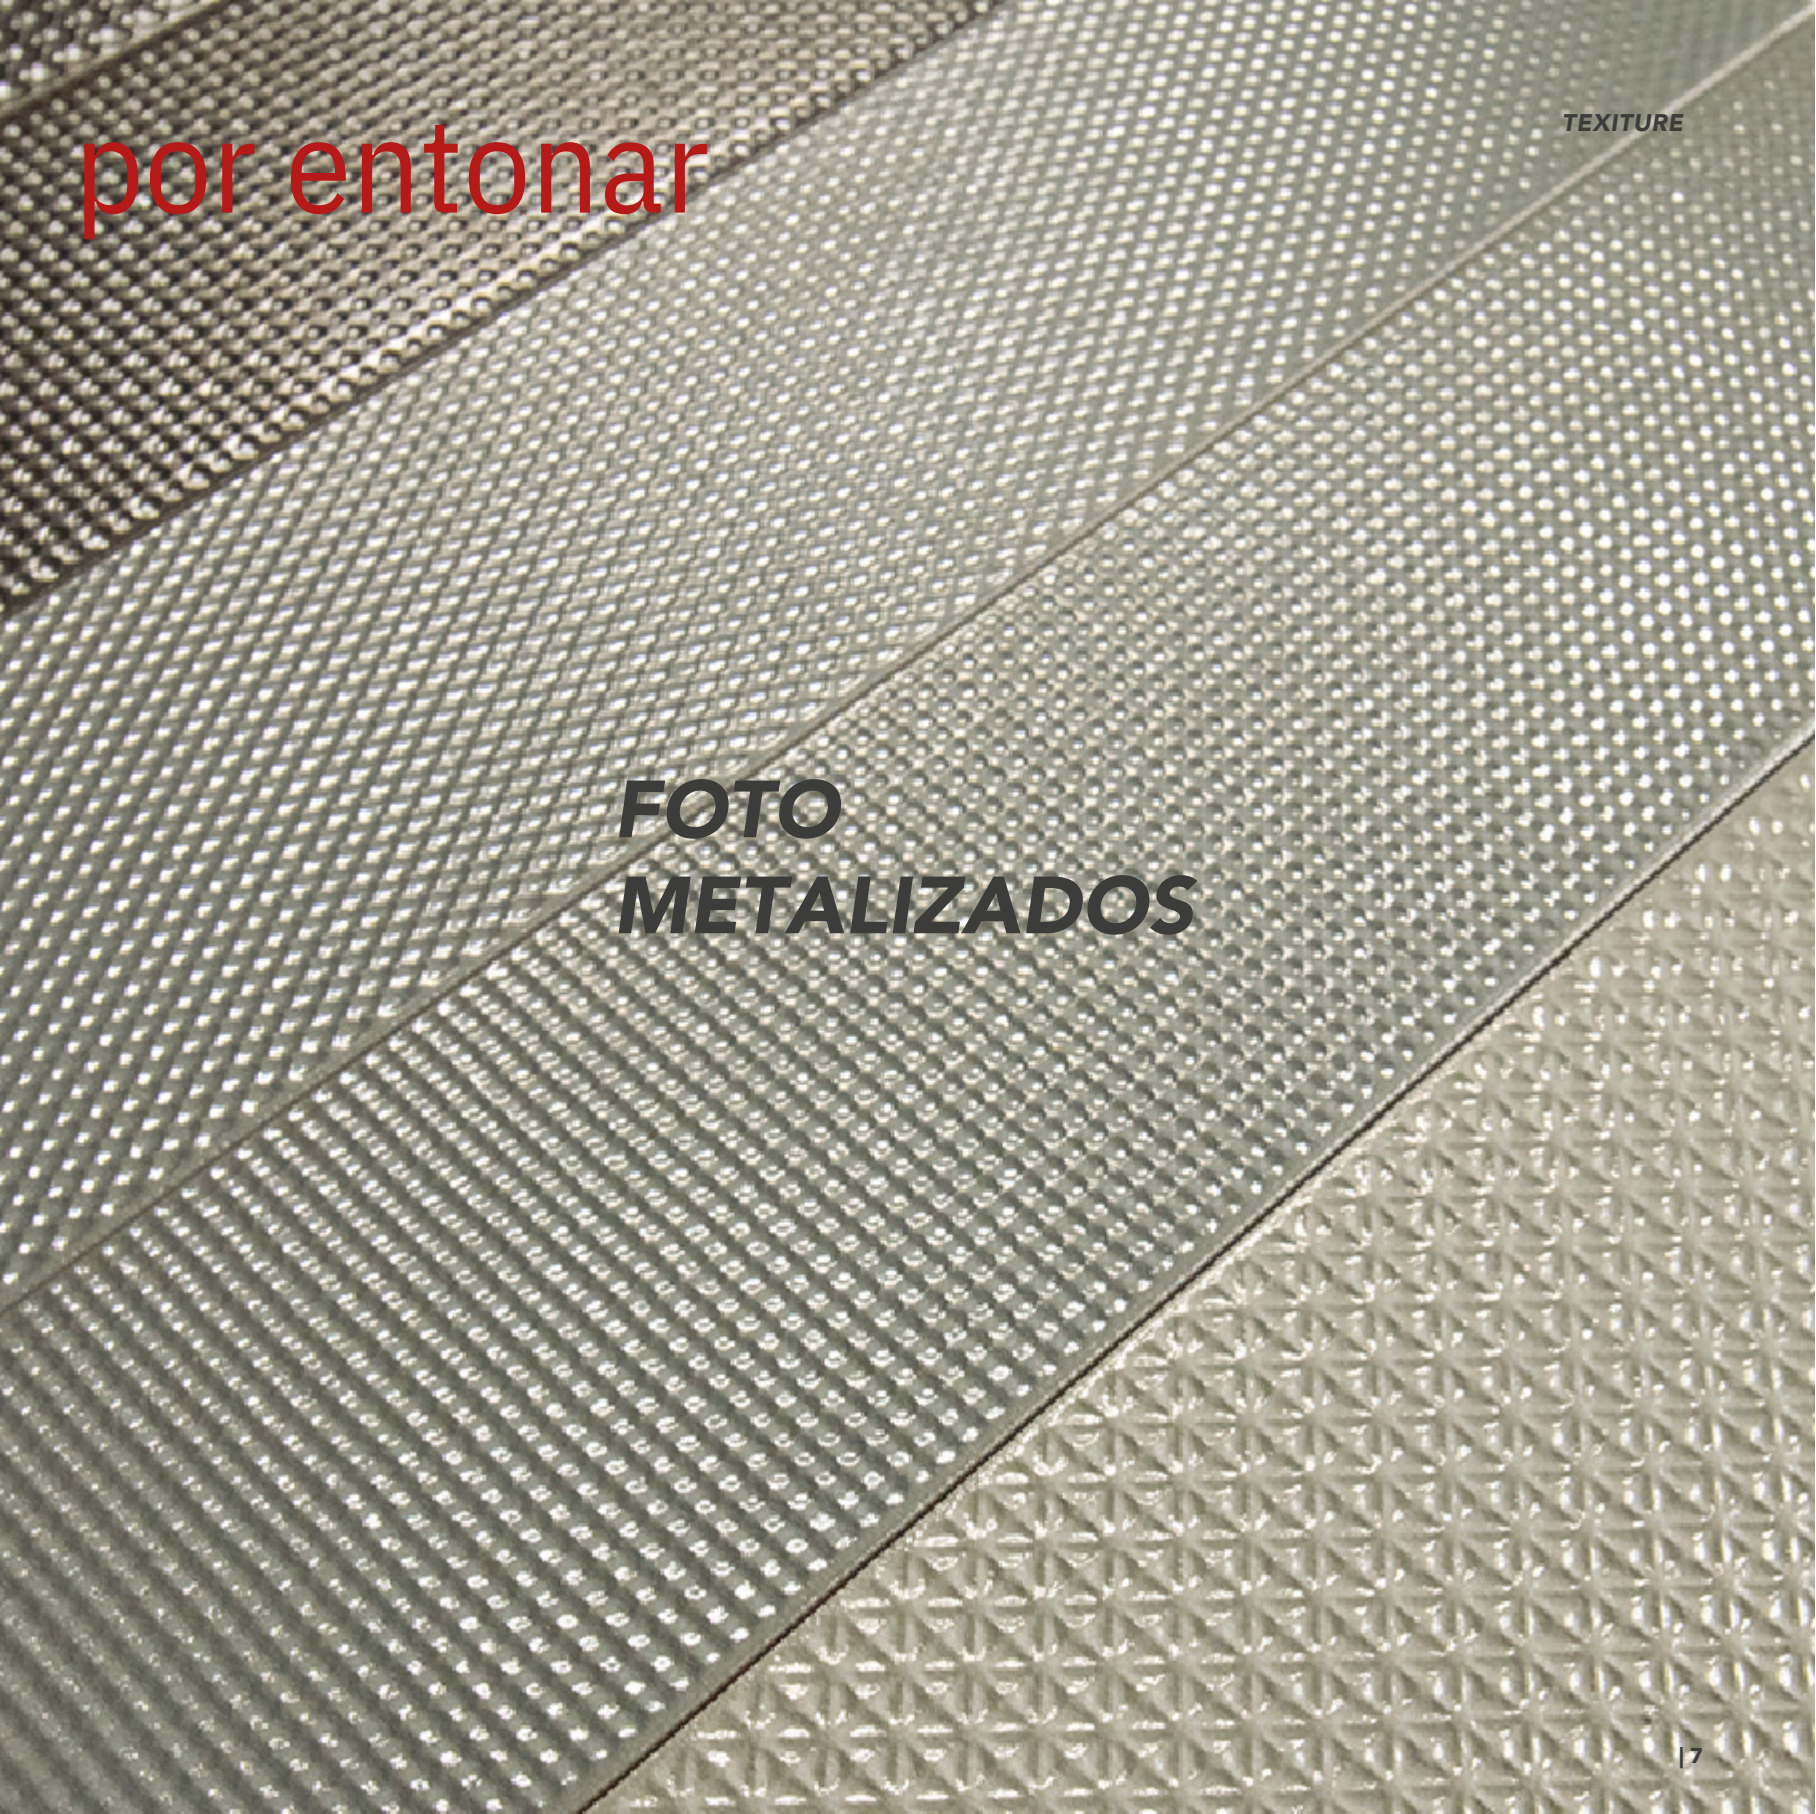

por entonar

TEXTURE

FOTO
METALIZADOS



Texture Sage - 80%
Texture Pattern Mix Sage - 20%

Texture Sage - 66,66% ▶
Texture Pattern Mix Sage - 33,3%
Texture Edge Sage
Floor Tiles: **Contempo Strip Natural**
(Love Affairs Collection)





Texture Pattern Mix Grey
Texture Grey

Floor Tiles: **Suit Ona / Suit Blanc**

◀ **Texture Dove - 33,3%**
Texture Pattern Mix Dove - 66,6%
Floor Tiles: **Suit Marino**



Textiture Pattern Mix Garnet
Textiture Edge Garnet
Floor Tiles: **Like Grana Plus 75% / Like Blanc - 25%**

Textiture Pattern Mix Garnet ►






Texture Pattern Mix Cotto

◀ *Texture Pattern Mix Cotto*
Texture Edge Cotto



Textiture Pattern Mix Ocean
Textiture Edge Ocean
Textiture Dove

Textiture Pattern Mix Ocean ►

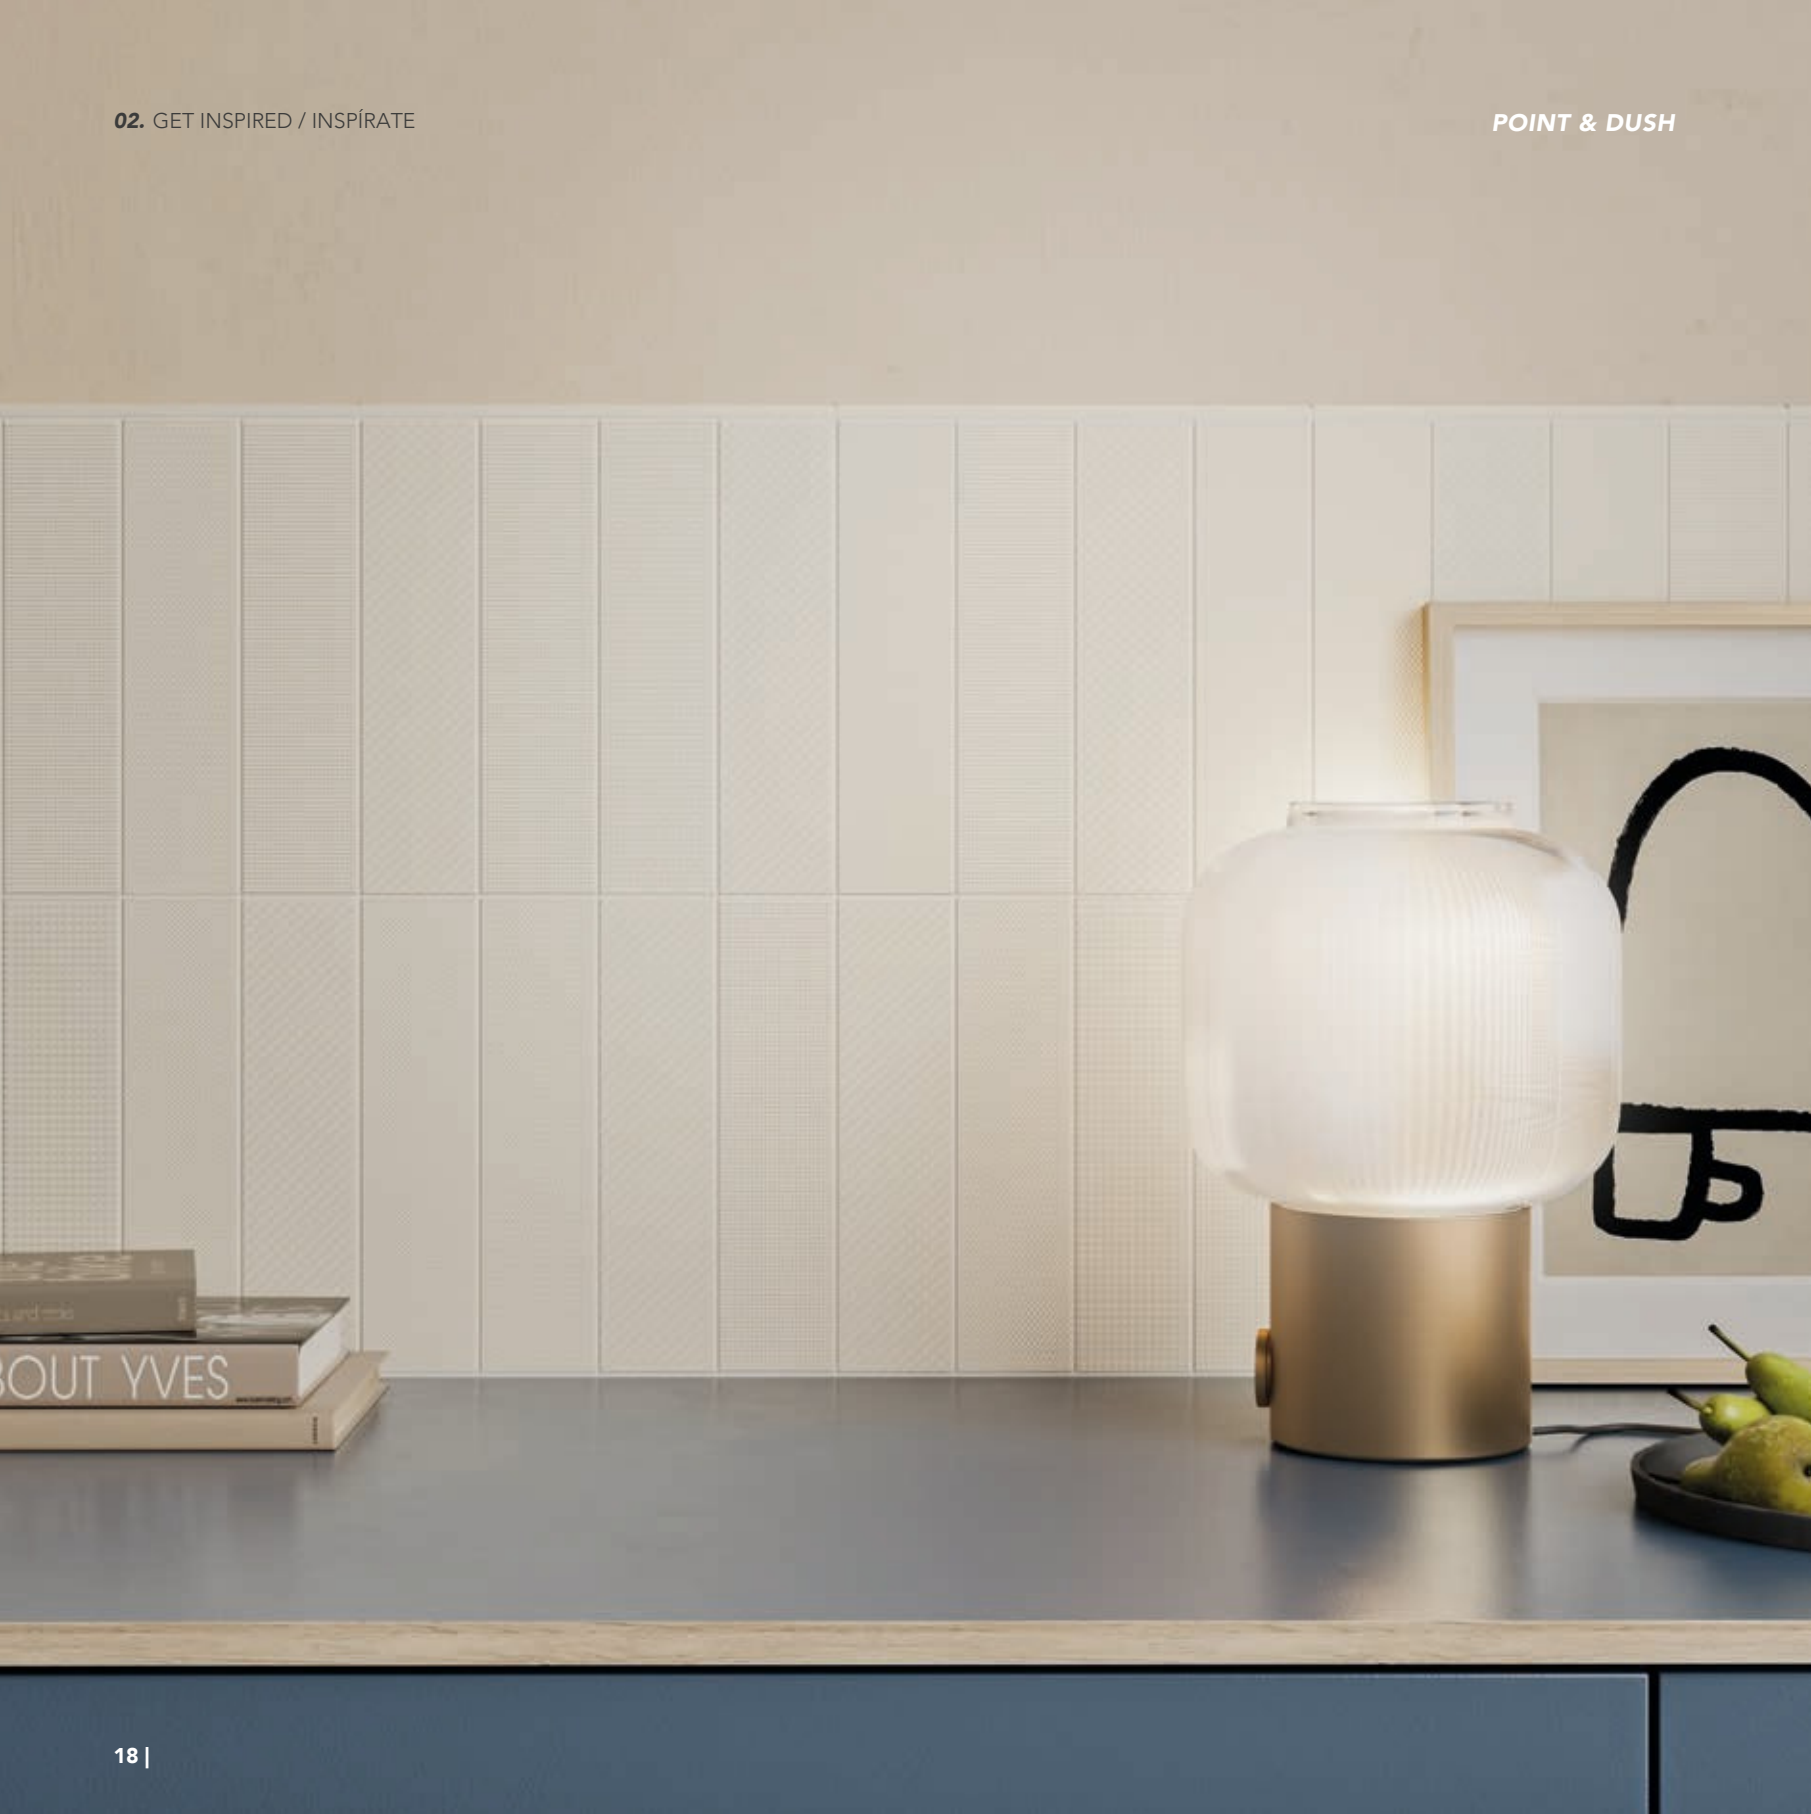

Texture Pattern Mix Dove
Texture Edge Dove

Floor Tiles: **Like Marino Plus - 75% / Like Blanc - 25%**

◀ **Texture Pattern Mix Dove**
Texture Edge Dove



Texture Pearl & Cotto
Texture Pattern Mix Pearl & Cotto

Texture Cotto - 33,3% ▶
Texture Pattern Mix Pearl - 66,6%
Floor Tiles: **Concrete Strip Light**
(Love Affairs Collection)






Texture Pearl - 53%
Texture Pattern Mix Pewter - 4%
Texture Pattern Mix Sage - 43%
 Floor Tiles: **Suit Moss**



Texture Pattern Mix Silver
 Floor Tiles: **Color Drops Graphite**

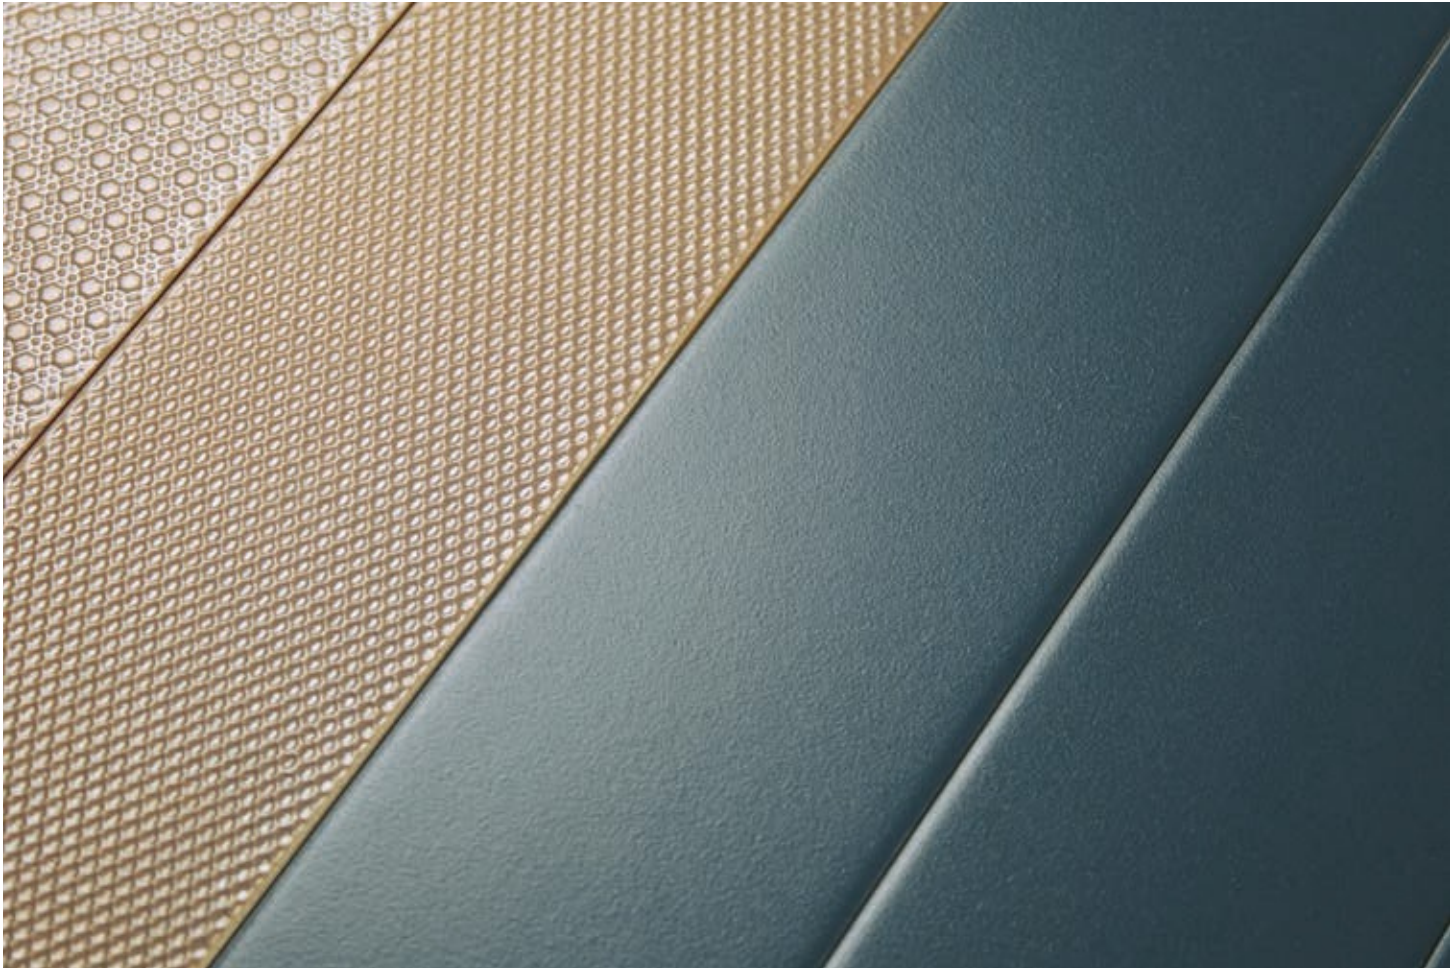

Texture Pattern Mix Bronze
Texture Ocean

◀ *Texture Pattern Mix Bronze*
Texture Ocean
Texture Edge Ocean
Floor Tile: **Suit Marino**






Texture Pattern Mix Brass
Floor Tiles: **Contempo Strip Natural**
(Love Affairs Collection)



Texture Pattern Mix Bronze ▶
Texture Pattern Mix Pearl
Floor Tiles: **Contempo Strip Natural**
(Love Affairs Collection)



Texture Pattern Mix Alabaster
Floor Tiles: **Elle Floor Dark Wood / Square Taupe Stone**
(Puzzle Collection)

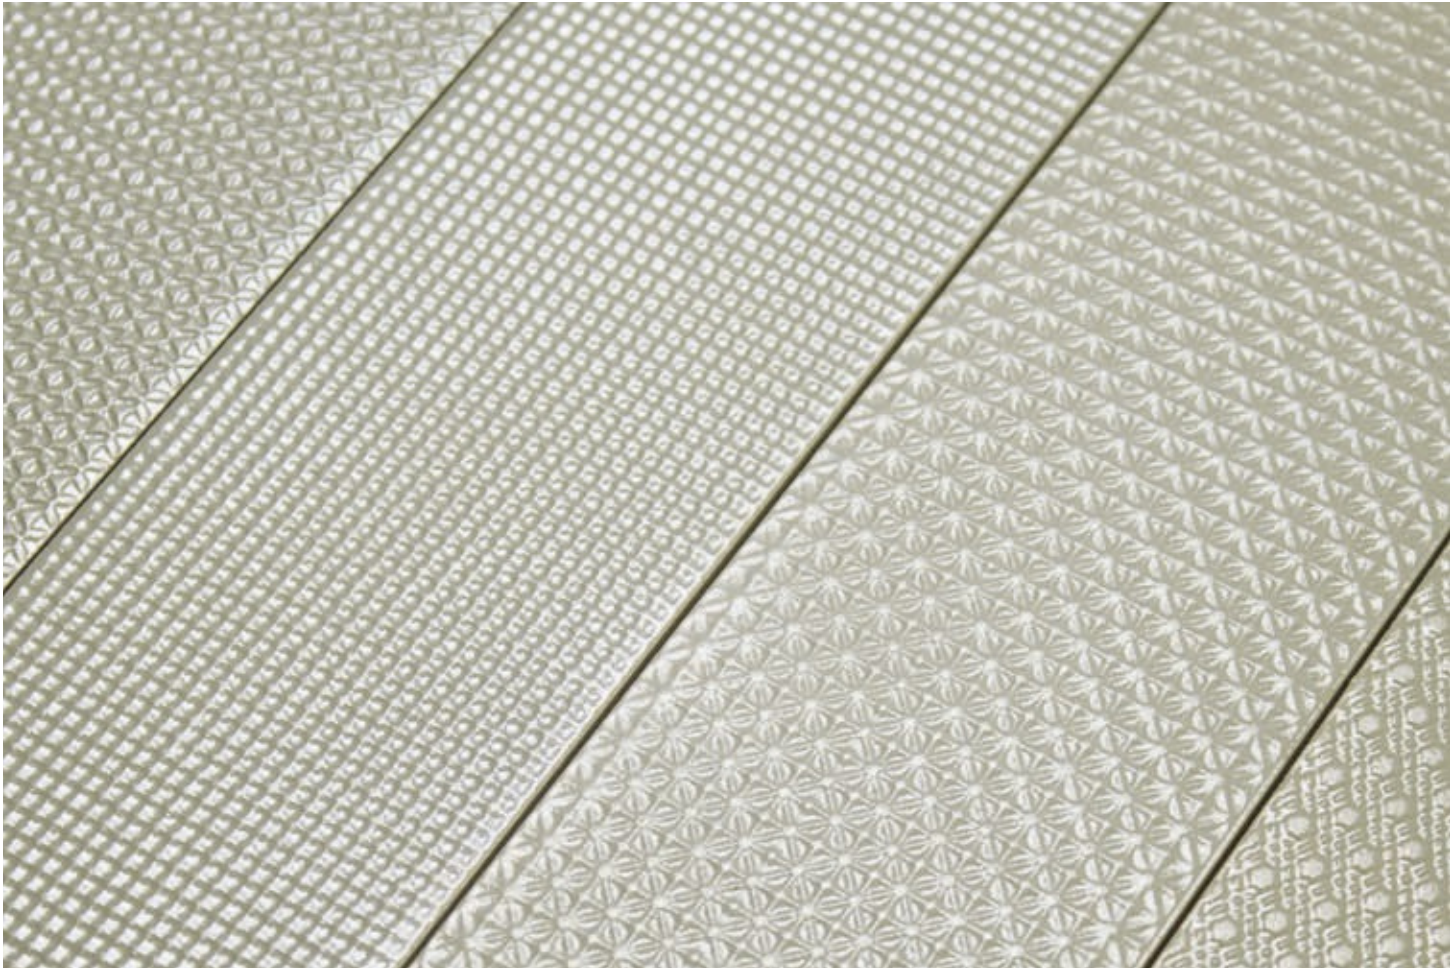

Texture Pattern Mix Alabaster



◀ *Texture Pattern Mix Cooper*
Texture Pearl



Texture Pattern Mix Brass



Texture Pattern Mix Brass

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Para un resultado óptimo, recomendamos usar 1 mm de junta.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result, we advise to use 1 mm (0.04”).

MAINTENANCE AND CLEANING


Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)
Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)

	FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	62 mm +/- 0,75 mm x 250 mm +/- 0,75 mm	UNE-EN ISO 10545-2:1998
	Water absorption	Eb>10%	UNE-EN ISO 10545-3:1997
	Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm2 Thickness < 7,5 mm mínimo 15 N/mm2	UNE-EN ISO 10545-4:2012
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	Class 5	UNE-EN ISO 10545-14:1998

TEXTURE & TEXTURE PATTERN MIX

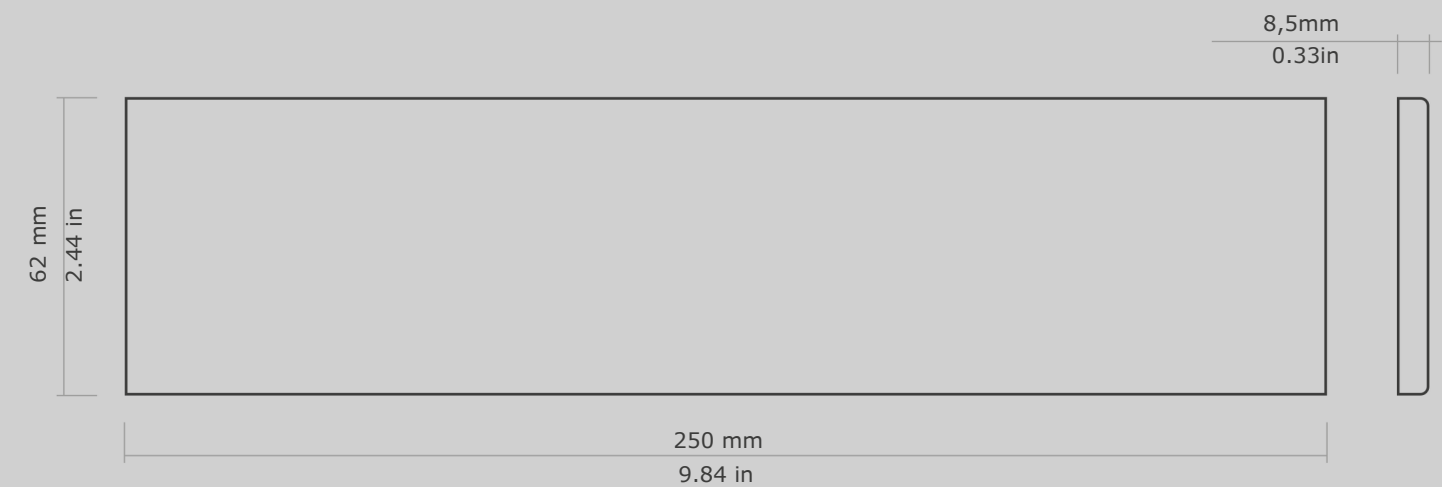

TEXTURE EDGE



Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Texture	2.5"x10"	29	14.33 lb	4.876 sq ft	120	585.120 sq ft
Texture Pattern Mix	2.5"x10"	29	14.33 lb	4.876 sq ft	120	585.120 sq ft
Edge	0.3"x10"	10	0.860 lb	8.186 ft	200	1882.71 ft

Modelo Model	Tamaño (cm) Size (cm)	Piezas/caja Pieces/box	Kg/caja kg/box	m2/caja m2/box	Cajas/palet Box/pallet	m2/palet m2/palle
Texture	6,2x25 cm	29	6,50 kg	0,453 m2	120	54,360 m2
Texture Pattern Mix	6,2x25 cm	29	6,50 kg	0,453 m2	120	54,360 m2
Edge	0,8x25 cm	10	0,390 kg	2,495 m	230	573,85 m

Model	Price Code
Texture	W07
Texture Pearl	W10
Texture Pattern Mix	W12
Texture Pattern Mix Pearl	W21
Texture Pattern Mix Metallics	W21
Texture Edge	WS3