

FEZ



— EST 1967 —

FACINGS

—
OF AMERICA

01. INTRO	pag. 3
02. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	pag. 4
03. RECOMMENDATIONS / RECOMENDACIONES	pag. 36
04. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	pag. 37
05. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	pag. 38
06. PACKING	pag. 39

Curtsey to the Imperial Moroccan city of **Fez** and its worldwide famous craft skills, considered as an alive cultural treasure.

Designed with a traditional approach, that combines beauty and practicality, they are suitable for any neat environment.

How to choose between the range of suggestive colours? glossy translucent finishes, soft mats, metallics in steel and copper sized 6.2x12,5cm (2.5"x5")
Twenty delightful alternatives full of life.

New contours into a perfect balance.

-

*Inspirada en **Fez** y su famosa artesanía, esta ciudad imperial marroquí está considerada un tesoro cultural vivo.*

Diseñada con un enfoque tradicional, que combina belleza y practicidad, esta colección es adecuada para cualquier espacio de tu hogar.

*¿Cómo decidirse ante una gama de colores tan sugerentes? Acabados brillantes y ligeramente translúcidos, sedosos mates, metálicos en acero y cobre... Todo ello en formato 6.2x12,5cm (2.5"x5")
Veinte deliciosas alternativas llenas de vida.*

FEZ
2.5"x5" / 6,2x12,5 cm



BULLNOSE FEZ
1.5"x5" / 3,5x12,5 cm



Different colour shades randomly mixed within the box.
Diferentes tonalidades encajadas aleatoriamente.





Fez Emerald Matt

Floor tiles:
Concrete Crayon Light Grey
by Love Affairs Collection



Fez Emerald Gloss

Floor tiles:
Cottage Grey by Cottage Collection



Fez Aqua Matt

Floor tiles:
Hexa Cottage White by Cottage Collection





Fez Ocean Gloss

Floor tiles
Cottage White by Cottage Collection



Fez Ocean Matt

Floor tiles
Hexa Cottage Grey by Cottage Collection





Mustard Gloss



White Gloss & Matt





Fez White Matt

Floor tiles:
Hexa Cottage Cotto by Cottage Collection



Warm Gloss



Warm Matt



Fez Grey Gloss

Floor tiles
Hexa Cottage Graphite by Cottage Collection



Grey Gloss & Matt



Fez Grey Gloss
Bullnose Fez Grey Gloss



Graphite Gloss



Fez Graphite Matt

Floor tiles
Hexa Cottage White & Grey
by Cottage Collection

Steel Gloss



Fez Steel Gloss

Floor tiles: **Calacatta Strip**
by Love Affairs Collection



Fez Copper Gloss

Floor tiles: **Aura Strip**
by Love Affairs Collection



Copper Gloss

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Para un resultado óptimo, recomendamos usar 1 mm de junta.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

ALTA VARIACIÓN CROMÁTICA

La colección Fez ha sido diseñada con una alta variación de tono entre piezas. Es importante verificar el producto antes de su instalación puesto que ninguna reclamación será aceptada una vez instalado.

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result, we advise to use 1 mm (0.04”).

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.



As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

STRONG CHROMATIC VARIATION

Fez Collection has been designed with a strong chromatic variation between pieces. Prior to any installation, range of tiles should be checked by the client. No claims will be accepted after installation.



Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%) Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)			
	FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	62 mm +/- 0,75 mm x 125 mm +/- 0,75 mm	UNE-EN ISO 10545-2:1998
	Water absorption	E _b >10%	UNE-EN ISO 10545-3:1997
	Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm ² Thickness < 7,5 mm mínimo 15 N/mm ²	UNE-EN ISO 10545-4:2012
	Crazing resistance	Pass (Except metallic finishes)	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA (Except metallic finishes)	UNE-EN ISO 10545-13:1998
	Stain resistance	Class 5	UNE-EN ISO 10545-14:1998

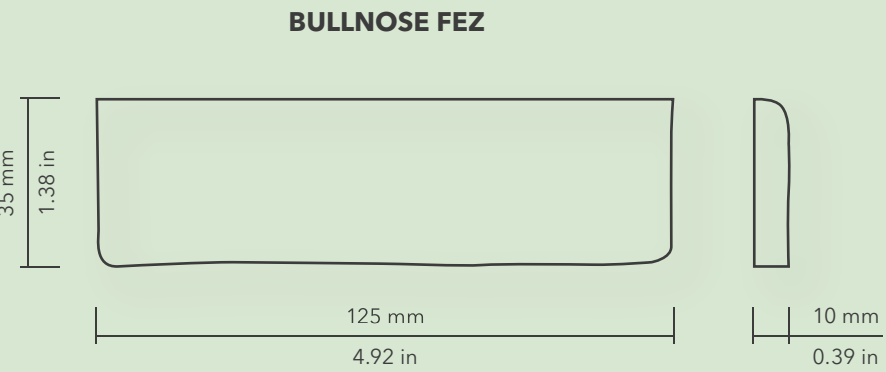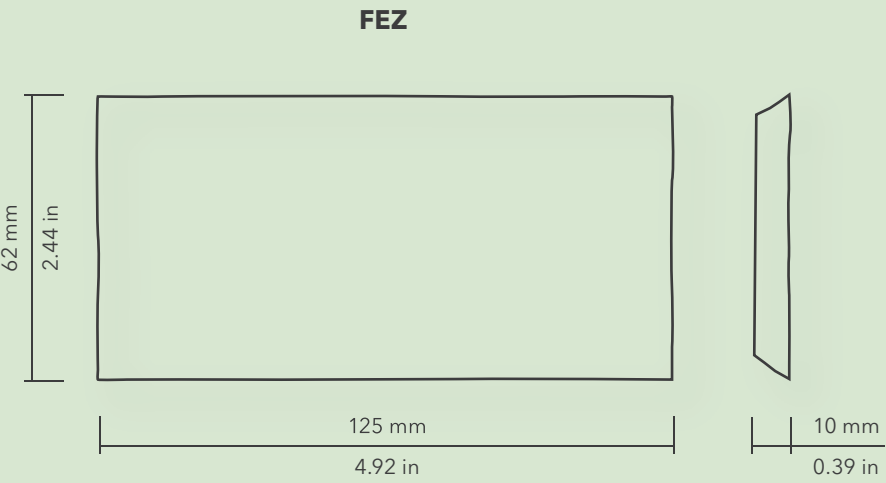

Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Fez	2.5"x5"	42	12.32 lb	3.55 sq ft	120	423.67 sq ft
Bullnose Fez	1.5"x5"	40	7.69 lb	16.34 Lft	350	5,718.5 Lft

Modelo Model	Tamaño (cm) Size (cm)	Piezas/caja Pieces/box	Kg/caja kg/box	m²/caja m²/box	Cajas/palet Box/pallet	m²/palet m²/pallet
Fez	6,2x12,5 cm	42	5,59 kg	0,328 m²	120	39,36 m²
Bullnose Fez	3,5x12,5 cm	40	3,49 kg	4,980 m	350	1743 m



— EST 1967 —

FACINGS

—
OF AMERICA