

FLOW



— EST 1967 —

FACINGS

OF AMERICA

FLOW

For those of us who like going with the flow...

Elegance and refinement achieved through subtle timeless colours and blending tones, over a diamond shape.

White, Taupe, Black, Blue and Old Rose diamonds; each one of them created with the random combination of 6 complementary shades in soft movement and matching decors.

And more! three wooden diamond colours: Light, Mid & Dark adding a touch of warmth to the range.

Freedom of movement flirting with perfection.

-

Para los que nos gusta fluir...

Elegancia y refinamiento conseguidos a través de una paleta atemporal de colores, sutileza de tonalidades y decorados sobre forma diamantada.

White, Taupe, Black, Blue y Old Rose, cada color conformado por la combinación aleatoria de 6 tonos en suave movimiento.

¡Además tres diamantados en madera! Light, Mid y Dark que aportan un toque de calidez a la gama.

Libertad de movimiento flirteando con la perfección.

01. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	<i>pag. 4</i>
02. GET INSPIRED / INSPIRATE	<i>pag. 6</i>
03. RECOMMENDATIONS / RECOMENDACIONES	<i>pag. 24</i>
04. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	<i>pag. 25</i>
05. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	<i>pag. 26</i>
06. PACKING	<i>pag. 27</i>




Flow Diamond Black

FLOW DIAMOND

5.5"x9.5" / 14x24 cm

Each colour has 6 different tone variations which are randomly mixed within the box /
Cada color tiene 6 variaciones de tono que se encajan aleatoriamente.

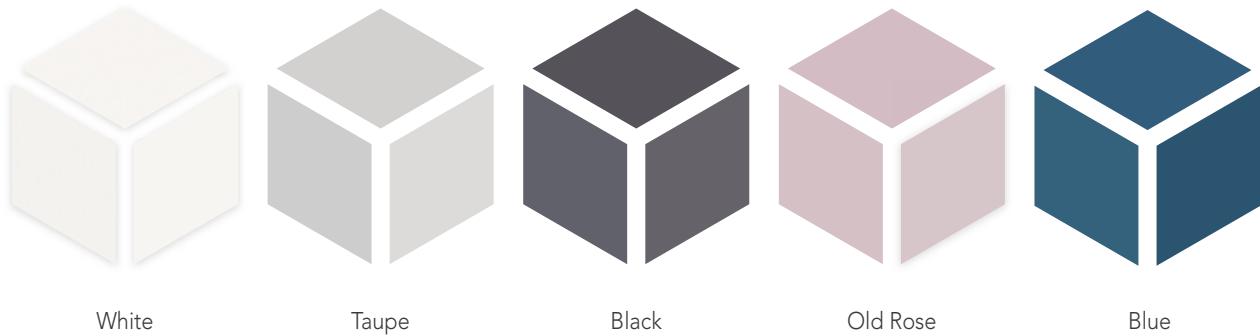

FLOW DIAMOND DECOR

5.5"x9.5" / 14x24 cm


Each colour has 14 different tone variations which are randomly mixed within the box /
Cada color tiene 14 variaciones de tono que se encajan aleatoriamente.



DIAMOND WOOD

5.5"x9.5" / 14x24 cm

Each colour has 30 different tone variations which are randomly mixed within the box /
Cada color tiene 30 variaciones de tono que se encajan aleatoriamente.

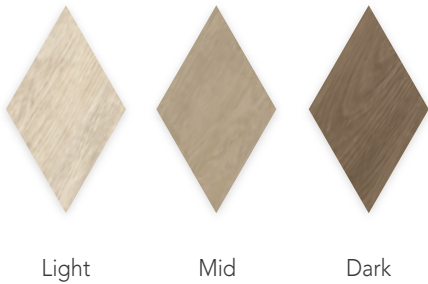





Flow Diamond Blue & White



Flow Diamond Taupe & White
(Randomly composed)





Flow Diamond Blue



Flow Diamond Blue



Flow Diamond Decor Old Rose
Flow Diamond Old Rose



Flow Diamond Decor Taupe
Flow Diamond Taupe



Flow Diamond Decor Black



Flow Diamond Blue
Diamond Wood Light



Diamond Wood Light 75%
Diamond Wood Mid 25%



Mud Diamond White
Diamond Wood Mid
(Randomly composed)



Flow Diamond White
Diamond Wood Mid



Diamond Wood Dark

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Para un resultado óptimo recomendamos usar 2 mm de junta.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

VARIACIÓN CROMÁTICA

Esta colección ha sido diseñada con una ligera variación de tono entre piezas. Es importante verificar el producto antes de su instalación puesto que ninguna reclamación será aceptada una vez instalado.

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result we advise to use 2 mm (0.08”) grout.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.


As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

CHROMATIC VARIATION

This collection has been designed with a lightly chromatic variation between pieces. Prior to any installation, range of tiles should be checked by the client. No claims will be accepted after installation.

Dry-pressed ceramic tiles whith water absorption B la ≤ 0,5% for interior and exterior floors and walls.
Baldosas cerámicas prensadas en seco con absorción de agua B la ≤ 0,5% para suelos y paredes interiores y exteriores.

	FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
	Dimensional Features	138 mm +/- 0,6 % x 239,5 mm +/- 0,6 %	UNE-EN ISO 10545-2:1998
	Water absorption	E _b ≤ 0,5%	UNE-EN ISO 10545-3:1997
	Modulus of rupture and breaking strength	Minimum 35 N/mm ² Individual Minimum 32 N/mm ²	UNE-EN ISO 10545-4:2012
	Abrasive resistance	PEI 2: Blue, Black & Wood Dark PEI 3: Old Rose, Taupe, Wood Light & Wood Mid PEI 4: White	UNE-EN ISO 10545-7:1999
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Frost resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	>3	UNE-EN ISO 10545-14:1998
	Non-slip value	Flow Diamond & Decor: R9 / CLASS 2 DCOF >0,42 Diamond Wood: R10 / CLASS 2 DCOF >0,42	DIN 51130:2014 ANSI A137.1:2012

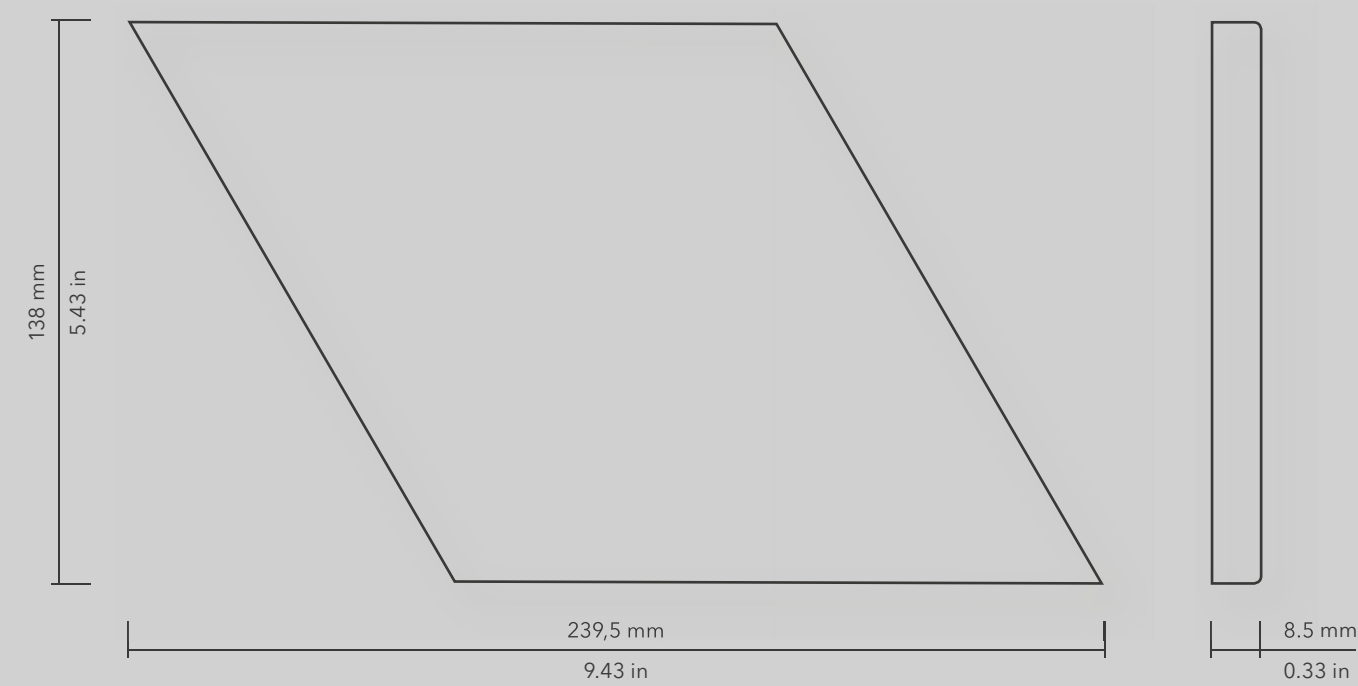

Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Flow Diamond	5.5"x9.5"	28	20 lb	5.02 sq ft	75	376.50 sq ft
Flow Diamond Decor	5.5"x9.5"	28	20 lb	5.02 sq ft	75	376.50 sq ft
Diamond Wood	5.5"x9.5"	28	20 lb	5.02 sq ft	75	376.50 sq ft

Modelo Model	Tamaño (cm) Size (cm)	Piezas/caja Pieces/box	Kg/caja kg/box	m²/caja m²/box	Cajas/palet Box/pallet	m²/palet m²/pallet
Flow Diamond	14x24 cm	28	9,07 kg	0,466 m²	75	34,95 m²
Flow Diamond Decor	14x24 cm	28	9,07 kg	0,466 m²	75	34,95 m²
Diamond Wood	14x24 cm	28	9,07 kg	0,466 m²	75	34,95 m²



— EST 1967 —

FACINGS

OF AMERICA