

novita
porcelain collection



— EST 1967 —


FACINGS

— OF AMERICA —



smeraldo polished


floor / wall tiles

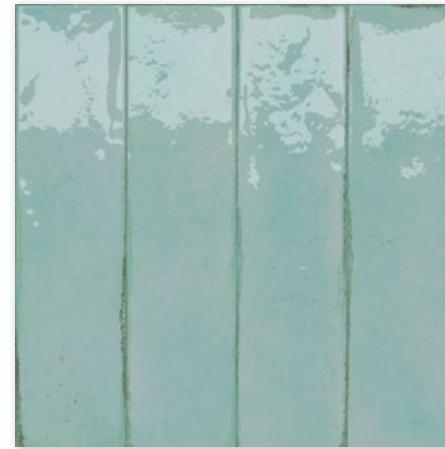


WNB00564 acquamarina polished
2 1/2"x10"x3/8"
in stock



WNB00558 bianco polished
2 1/2"x10"x3/8"
in stock

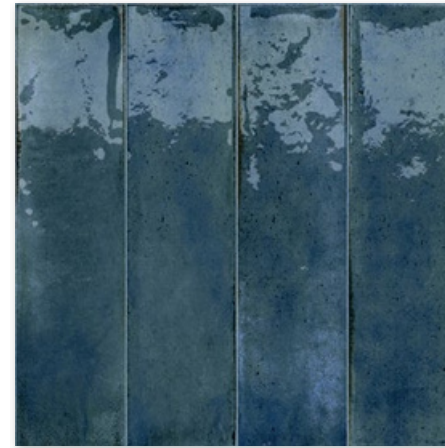

WNB00561 blue polished
2 1/2"x10"x3/8"
in stock

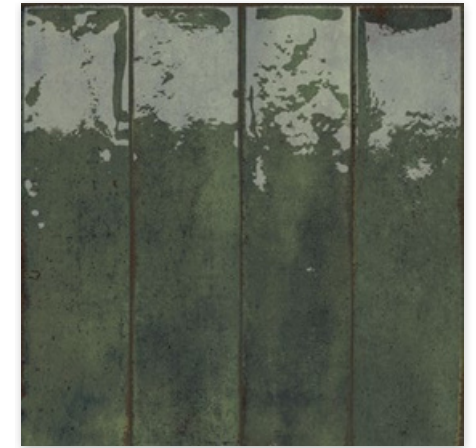

WNB00565 smeraldo polished
2 1/2"x10"x3/8"
in stock

bullnoses



WNB00573 acquamarina polished liner
in stock



WNB00567 bianco polished liner
in stock



WNB00570 blue polished liner
in stock



WNB00574 smeraldo polished liner
in stock



acquamarina polished

technical information

characteristics & test methods	requirements ANSI A 137.1	our general values
determination water absorption (ASTM C 373)	average value E b ≤ 0,5 %	average value ≤ 0,5%
classification	definition § 3.0	porcelain tiles
physical properties		
breaking strength - (ASTM C 648)	average ≥ 250 lbf (1.11 kN) individual ≥ 225 lbf (1.00 kN)	complies
thermal shock resistance - (ASTM C 428)	pass	complies
bond strength - (ASTM C 482)	≥ 50 psi (0.34 MPa)	> 1 MPa
color uniformity - (ASTM C 609 and ANSI A 137.1 Section 9.3) (2)	V0 - 3 Judds	see the specific section
mohs hardness scale - (ex EN 101 / BS 6431-13)	--	≥ 5
chemical properties		
chemical resistance - (ASTM C 650)	as reported	resistant
stain resistance - (ASTM C 1378)	as reported	resistant

(1) For level interior spaces expected to be walked upon when wet. (2) For V0 tiles only