




BONE NATURAL 24"X48"

COLORS

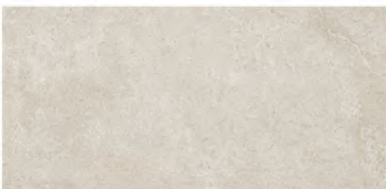

BONE NATURAL 24"X48"



RIFT NATURAL 24"X48"



PERLA NATURAL 24"X48"

Introducing Fossil, an Italian-made rectified porcelain tile inspired by ancient French limestone. Fossil is characterized by a soft color palette and minimal movement. Versatility and durability make it suitable for both residential and commercial settings.

ADDITIONAL SIZES

- 12"X24" NATURAL RECTIFIED
- 24"X24" ANTISLIP (BONE, PERLA & RIFT)
- 24"X24" NATURAL RECTIFIED
- 12"X24" ANTISLIP (BONE, PERLA & RIFT)
- 48"X48" NATURAL RECTIFIED (BONE, PERLA, RIFT)

SPECIALTY

- 2"X2" MOSAIC
- ELONGATED HEXAGON MOSAIC
- 12"X24" RT STAIR TREAD WITH SBN
- 13.2"X24" STAIR TREAD WITH PROFILE
- 13.2"X48" STAIR TREAD WITH PROFILE
- 13.2"X13.2" STAIR CORNER WITH PROFILE

APPLICATIONS

- INTERIOR WALLS & FLOORS
- EXTERIOR WALLS & FLOORS

FOSSIL		PORCELAIN STONEWARE	
FLOOR TILES	CLASSIFICATION IN ACCORDANCE WITH EN 14411 ANNEXE G B Ia UGL		
PHYSICAL-CHEMICAL PROPERTIES	STANDARD OF TEST	REQUIREMENTS	AVERAGE RATING
THICKNESS	ISO 10545-02	3/8" ± 5%	CONFORMS
WATER ABSORPTION	ISO 10545-03	≤ .5%	CONFORMS
CHEMICAL RESISTANCE	ISO 10545-13	CLASS UB MIN (UGL)	ULA
BREAK RESISTANCE	ISO 10545-04	S ≥ 1300 N	CONFORMS
		R ≥ 35N/MM ²	
DEEP SCRATCH RESISTANCE	ISO 10545-06	≤ 175 MM ³	CONFORMS
THERMAL SHOCK RESISTANCE	ISO 10545-09	TEST METHOD AVAILABLE	CONFORMS
FROST RESISTANCE	ISO 10545-12	TEST METHOD AVAILABLE	CONFORMS
STAIN RESISTANCE	ISO 10545-14	CLASS 3 MIN	CONFORMS
SLIP RESISTANCE	DIN 51130	CLASSIFICATION R	R9
DYNAMIC COEFFICIENT OF FRICTION	ANSI A137.1:2012	≥ .42 WET	CONFORMS

FOSSIL		WHITE BODY WALL TILE	
WALL TILES	CLASSIFICATION IN ACCORDANCE WITH GRUPPO B III GL		
PHYSICAL-CHEMICAL PROPERTIES	STANDARD OF TEST	REQUIREMENTS	AVERAGE RATING
THICKNESS	ISO 10545-02	VARIES ± 10%	CONFORMS
WATER ABSORPTION	ISO 10545-03	EV > 10%	CONFORMS
CHEMICAL RESISTANCE	ISO 10545-13	CLASS UB MIN (UGL)	ULA
BREAK RESISTANCE	ISO 10545-04	S ≥ 1300 N	CONFORMS
		R ≥ 35N/MM ²	
CRAZING RESISTANCE	ISO 10545-11	TEST METHOD AVAILABLE	CONFORMS
STAIN RESISTANCE	ISO 10545-14	CLASS 3 MIN	CONFORMS

PLEASE VIEW ACTUAL MATERIAL BEFORE MAKING YOUR SELECTION, AS PRINTED IMAGES ARE ONLY REPRESENTATIVE. SHADE VARIATION IS TO BE EXPECTED.

