




MINOLA BRUSHED & PORTIA BRUSHED


COLORS

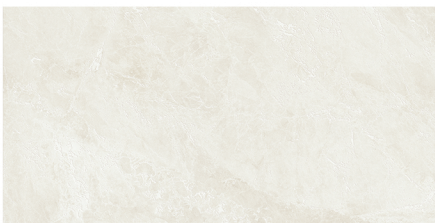


JULIET BRUSHED




OPHELIA BRUSHED

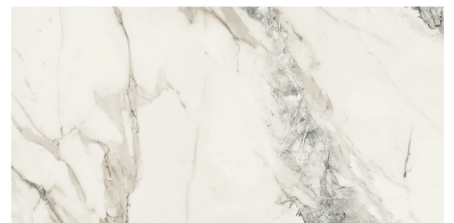


MINOLA BRUSHED

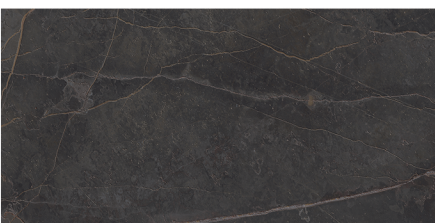

PORTIA BRUSHED

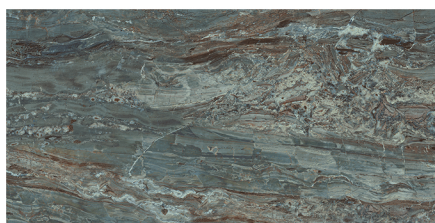

IMOGEN BRUSHED

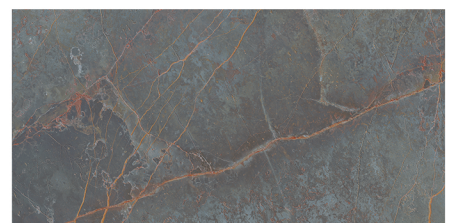

ROSALINE BRUSHED

Theater is a dramatic marble-look porcelain with bold color, exciting pattern, and an undeniably realistic texture. The dazzling depth and silky finish create a cinematic effect, giving life to both residential and commercial interior and exterior environments.

AVAILABLE SIZES

32"X32" BRUSHED & NATURAL
 48"X48" BRUSHED & NATURAL
 24"X48" BRUSHED & NATURAL
 7MM 48"X110" BRUSHED & NATURAL (OPHELIA, MINOLA, & PORTIA ONLY)

IMOGEN IS ONLY AVAILABLE IN 24"X48" BRUSHED & NATURAL

APPLICATIONS

INTERIOR & EXTERIOR FLOORS & WALLS
 STEAM SHOWERS
 POOLS & SPAS

SPECIALTY

12"X48" GROOVE WALL TILE (MINOLA & ROSALINE ONLY)
 3"X48" TRIM NATURAL
 12"X12", 2"X2" MOSAIC NATURAL
 11"X11" RECITAL MOSAIC JULIET & OPHELIA MIX BRUSHED
 11"X11" RECITAL MOSAIC MINOLA & PORTIA MIX BRUSHED
 11"X13" THEATER MOSAIC ROSALINE, PORTIA, & OPHELIA MIX BRUSHED
 13"X47" STAIR TREAD WITH PROFILE BRUSHED & NATURAL
 13"X47" STAIR TREAD CORNER BRUSHED & NATURAL

FLOOR TILES		CLASSIFICATION IN ACCORDANCE WITH EN 14411 ANNEXE G B la UGL		
FORMAT		RECTIFIED PORCELAIN		
NUMBER OF FACES		12 (32"X32")		
ACTUAL DIMENSIONS		31.50"X31.50" (32"X32")		
THICKNESS		9MM		
PHYSICAL-CHEMICAL PROPERTIES		STANDARD OF TEST	REQUIREMENTS	AVERAGE RATING
WATER ABSORPTION		ISO 10545-03	≤ .5%	CONFORMS
RESISTANCE TO BENDING		ISO 10545-04	> 35N/MM²	CONFORMS
BREAKING STRENGTH		ISO 10545-04	> 1300 N	> 2500 N
DEEP SCRATCH RESISTANCE		ISO 10545-06	< 145 MM³	< 109 MM³
THERMAL SHOCK RESISTANCE		ISO 10545-09	PASS ACCORDING TO EN ISO 10545-1	CONFORMS
CHEMICAL RESISTANCE		ISO 10545-13	CLASS UB MIN (UGL)	GLA/GHA CONFORMS
FROST RESISTANCE		ISO 10545-12	PASS ACCORDING TO EN ISO 10545-1	CONFORMS
STAIN RESISTANCE		ISO 10545-14	CLASS 3 MIN	CLASS 5
			AVERAGE VALUE	
SKID RESISTANCE	STANDARD OF TEST	INTERNATIONAL VALUE	NATURAL	BRUSHED
	DM. 23689 BCRA	> 0.40	> 0.40	N/A
	ANSI A 137.1	WET DCOF > 0.42	> 0.42	/
	DIN 51130	N/A	R10	N/A
	DIN 51097	N/A	A+B, A+B MOSAICO, 4.7X4.7	N/A
	BS 7976 PTV ≥ 36° LOW SLIP RISK	N/A	≥ 36 Dry	N/A
			≥ 36 Wet	
AS 4586		N/A	CLASS P3	N/A
USE CLASSIFICATION			HEAVY TRAFFIC	MEDIUM TRAFFIC

PLEASE VIEW ACTUAL MATERIAL BEFORE MAKING YOUR SELECTION, AS PRINTED IMAGES ARE ONLY REPRESENTATIVE OF THIS PRODUCT'S BEAUTY. SHADE VARIATION IS TO BE EXPECTED.

— EST 1967 —

FACINGS

OF AMERICA