SABIL



EST 1967

FACINGS

OF AMERICA

SABIL

Sabil is born from the encounter between ceramics and nature. Each piece reveals unique nuances, as if preserving the trace of time, reminding us that the imperfect, the organic, and the authentic still have the power to move us.

With three complementary formats and a wide range of colors featuring rich, tactile textures, Sabil is a collection that does not seek perfection, but authenticity.

At the heart of ceramics when nature isn't guest but host.

-

Sabil nace del encuentro entre la cerámica y la naturaleza. Cada pieza revela matices únicos, como si conservara la huella del tiempo, para que lo imperfecto, lo orgánico y lo auténtico vuelva a emocionarnos.

Con tres formatos complementarios y una amplia gama de colores con texturas matéricas y ricas, Sabil es esa colección que no persigue la perfección, sino la autenticidad.

En el corazón de la cerámica, cuando la naturaleza no es la invitada sino anfitriona.

01.
SIZES, COLOURS AND FINISHES /
FORMATOS, COLORES Y ACABADOS pag. 4

02.
GET INSPIRED /
INSPÍRATE pag. 8

03.
GROUTING RECOMMENDATIONS /
RECOMENDACIONES PARA EL REJUNTADO pag. 42

04.
TECHNICAL FEATURES /
CARACTERÍSTICAS TÉCNICAS pag. 44

05.
PACKING pag. 45

06.
PRICE CODE /
CÓDIGO DE TARIFA pag. 45

07.
TECHNICAL DRAWINGS /
DIBUJOS TÉCNICOS pag. 46

08.
RECOMMENDATIONS /
RECOMENDACIONES pag. 47



SABIL FIT 2,8x15 cm / 1.2”x6”

P $ W27




Flour




Vanilla




Cloud



Viridian



Jungle



Ultramarine

SABIL ROUNDED EDGE 1,1x15 cm / 0.5”x6”

W $ WS3

Available in all colours.
Disponible en todos los colores.

SABIL 5x15 cm / 2”x6”


P $ W25




Flour




Vanilla




Cloud



Viridian



Jungle



Ultramarine

SABIL PIXEL 15x15 cm / 6”x6”

P $ W18



Flour



Vanilla



Cloud



Viridian



Jungle



Ultramarine





Sabil Fit **Viridian 37,5%**
Sabil **Viridian 62,5%**
Rounded Edge Sabil **Viridian**

Back Wall: *Sabil* **Flour 60% & Viridian 5%,** *Sabil Fit* **Flour 35% &**
Rounded Edge Sabil **Viridian**

Sabil Fit **Jungle 16,6%**
Sabil **Jungle 83,4%**

Floor: Love Affairs Timber Strip Brown (Love Affairs Collection)







Sabil Fit **Cloud 85% &** *Sabil* **Cloud 15%**

Pool:*Sabil Pixel* **Cloud &** *Sabil* **Cloud**

Sabil Fit **Vanilla 39,4%**
Sabil **Vanilla 60,6%**
Rounded Edge Sabil **Vanilla**

(Random pattern)



Reef **Sand**

Floor: Roots XXL Sand & XL Sand (Roots Collection)





Sabil **Ultramarine 12,5%, Flour 41,7% & Cloud 45,8%**




▲ *Sabil Fit* **Flour &** *Sabil* **Flour**

Bench: ***Sabil Fit* Jungle**
Pool: ***Sabil Pixel* Jungle**

Sabil Fit **Vanilla 38% &** *Sabil* **Vanilla 62%** ▶
Pool: ***Sabil Pixel* Vanilla**
(Random pattern)

Floor: Halo XXL Dawn (Halo Collection)



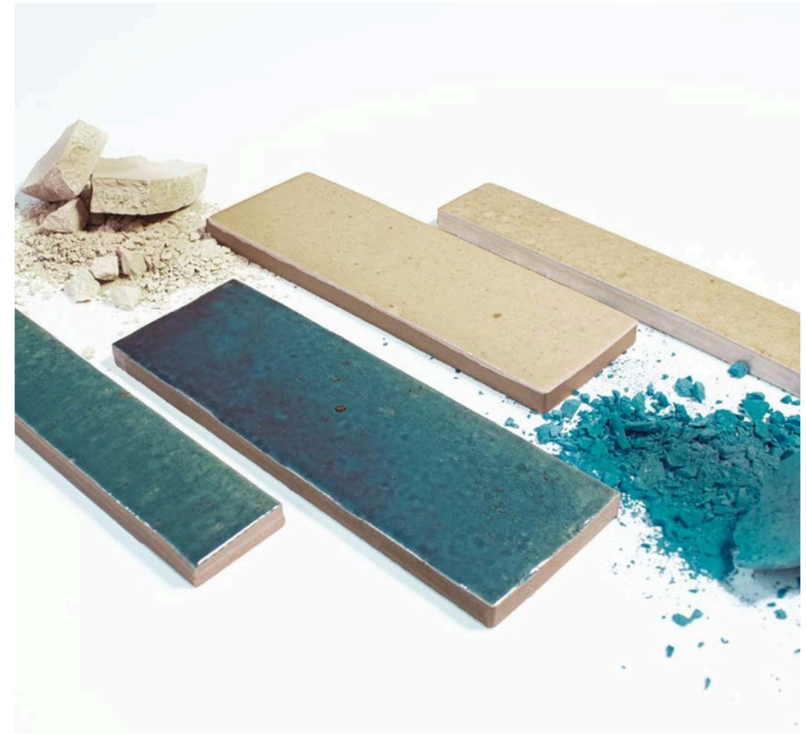


Sabil Fit **Ultramarine 85% & Vanilla 15%**

Bar:*Sabil* **Ultramarine**
Back Wall:*Sabil* **Vanilla**



Sabil **Flour**
Sabil Fit **Vanilla**



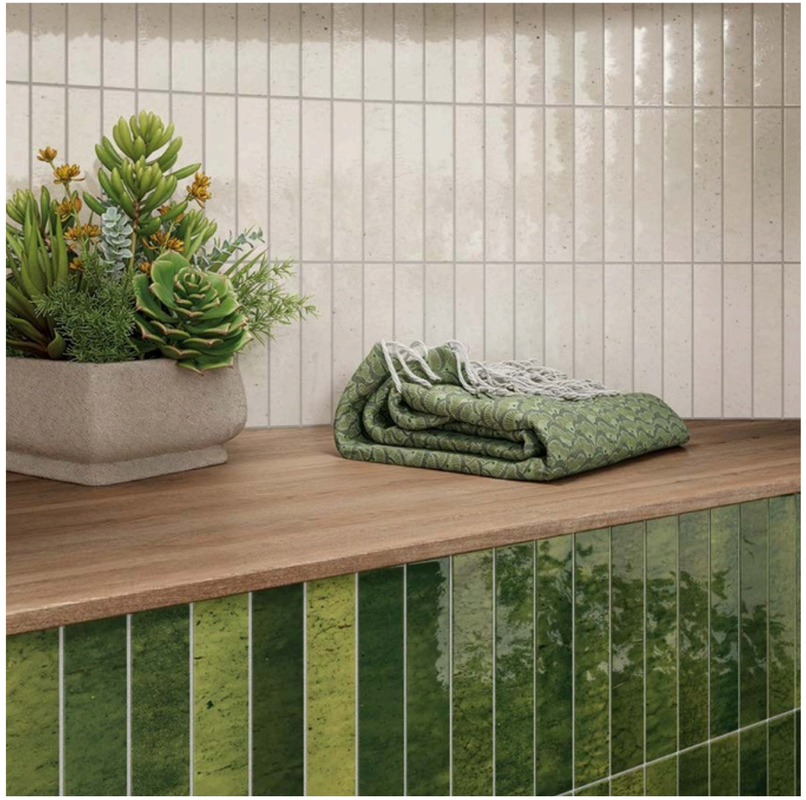

Sabil Fit **Flour & Jungle**

Floor: Love Affairs Contempo Strip Walnut
(Love Affairs Collection)



Wall: *Sabil Fit* **Flour 38% &** *Sabil* **Flour 62%**
Pool:*Sabil Pixel* **Flour**







Sabil Fit **Cloud 39,8%**
Sabil **Vanilla 60,2%**


Floor: Roots S Sand (Roots Collection)

Sabil Fit **Jungle 57,87%**
Sabil **Jungle 42,13%**








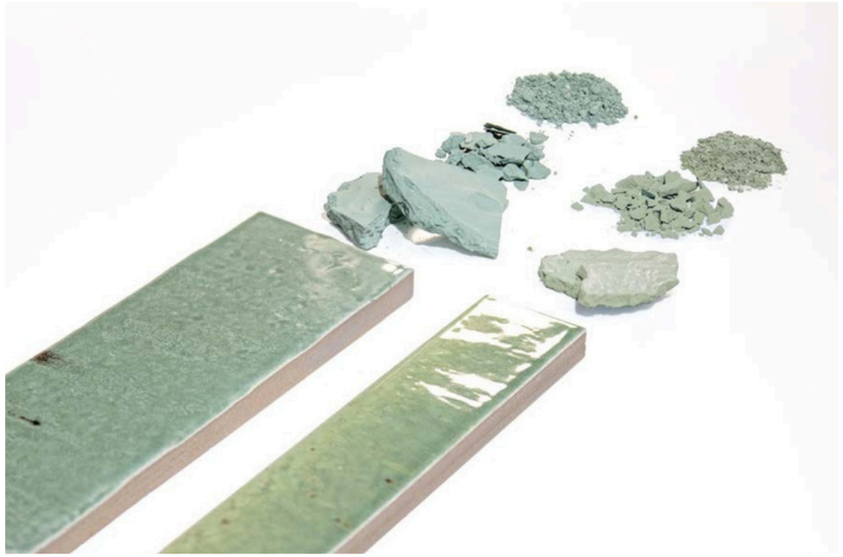

Sabil Fit **Viridian 57,87%**
Sabil **Viridian 42,13%**
(Random pattern)

Floor: Cross Cut XXL & S Tuscan (Cross Cut Collection)

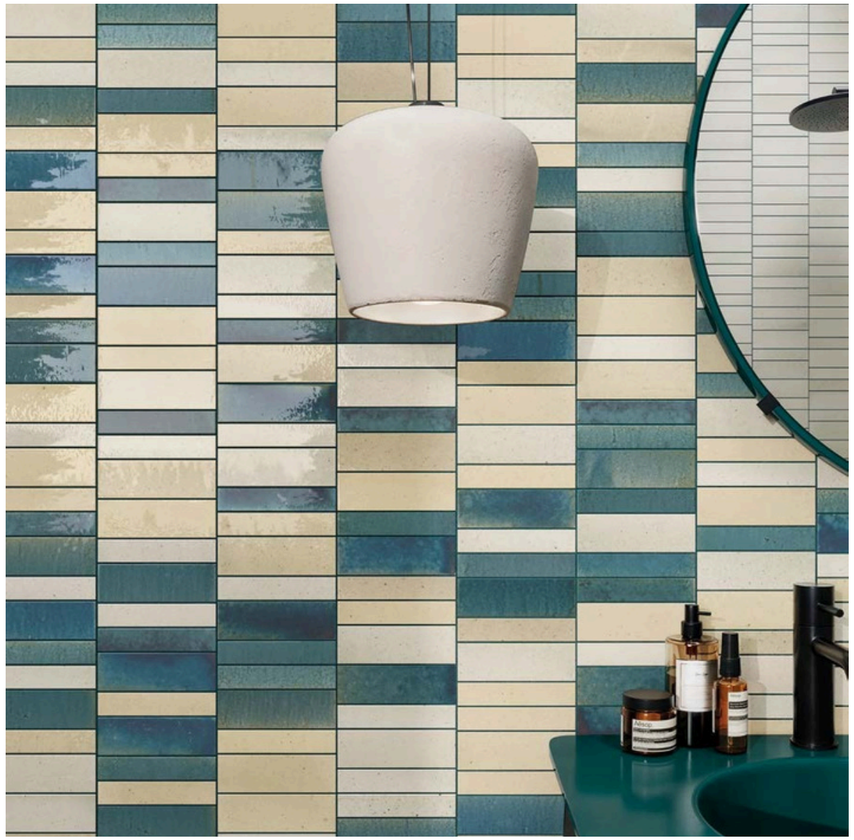


▲ *Sabil Fit* **Ultramarine 13,7%, Vanilla 9,8% & Flour 17,7%**
Sabil **Ultramarine 26,1%, Vanilla 19,6% & Flour 13,1%**

(Random pattern)

Sabil Fit **Vanilla 12,5% & Flour 25%** ▶
Sabil **Vanilla 34,72% & Flour 27,78%**
Rounded Edge Sabil **Vanilla & Flour**

(Random pattern)

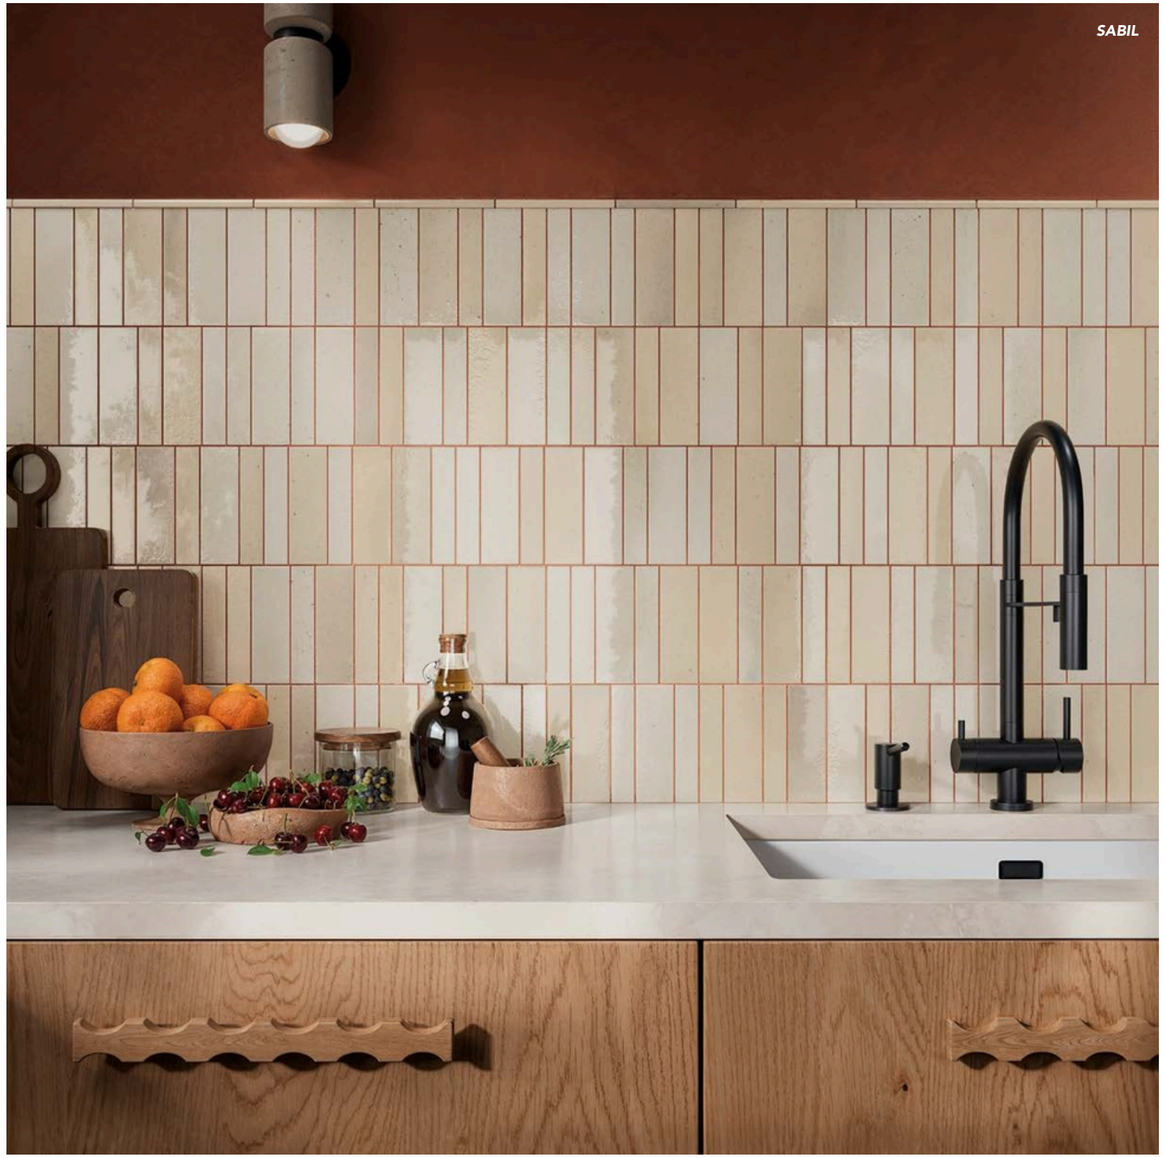

SABIL

Bar: *Sabil Fit* **Cloud**
Wall: *Sabil* **Cloud**


Floor: Love Affairs Contempo Strip Natural (Love Affairs Collection)



Sabil Fit **Ultramarine 36% &** *Sabil* **Ultramarine 64%**

Floor & Pool:*Sabil Pixel* **Ultramarine**



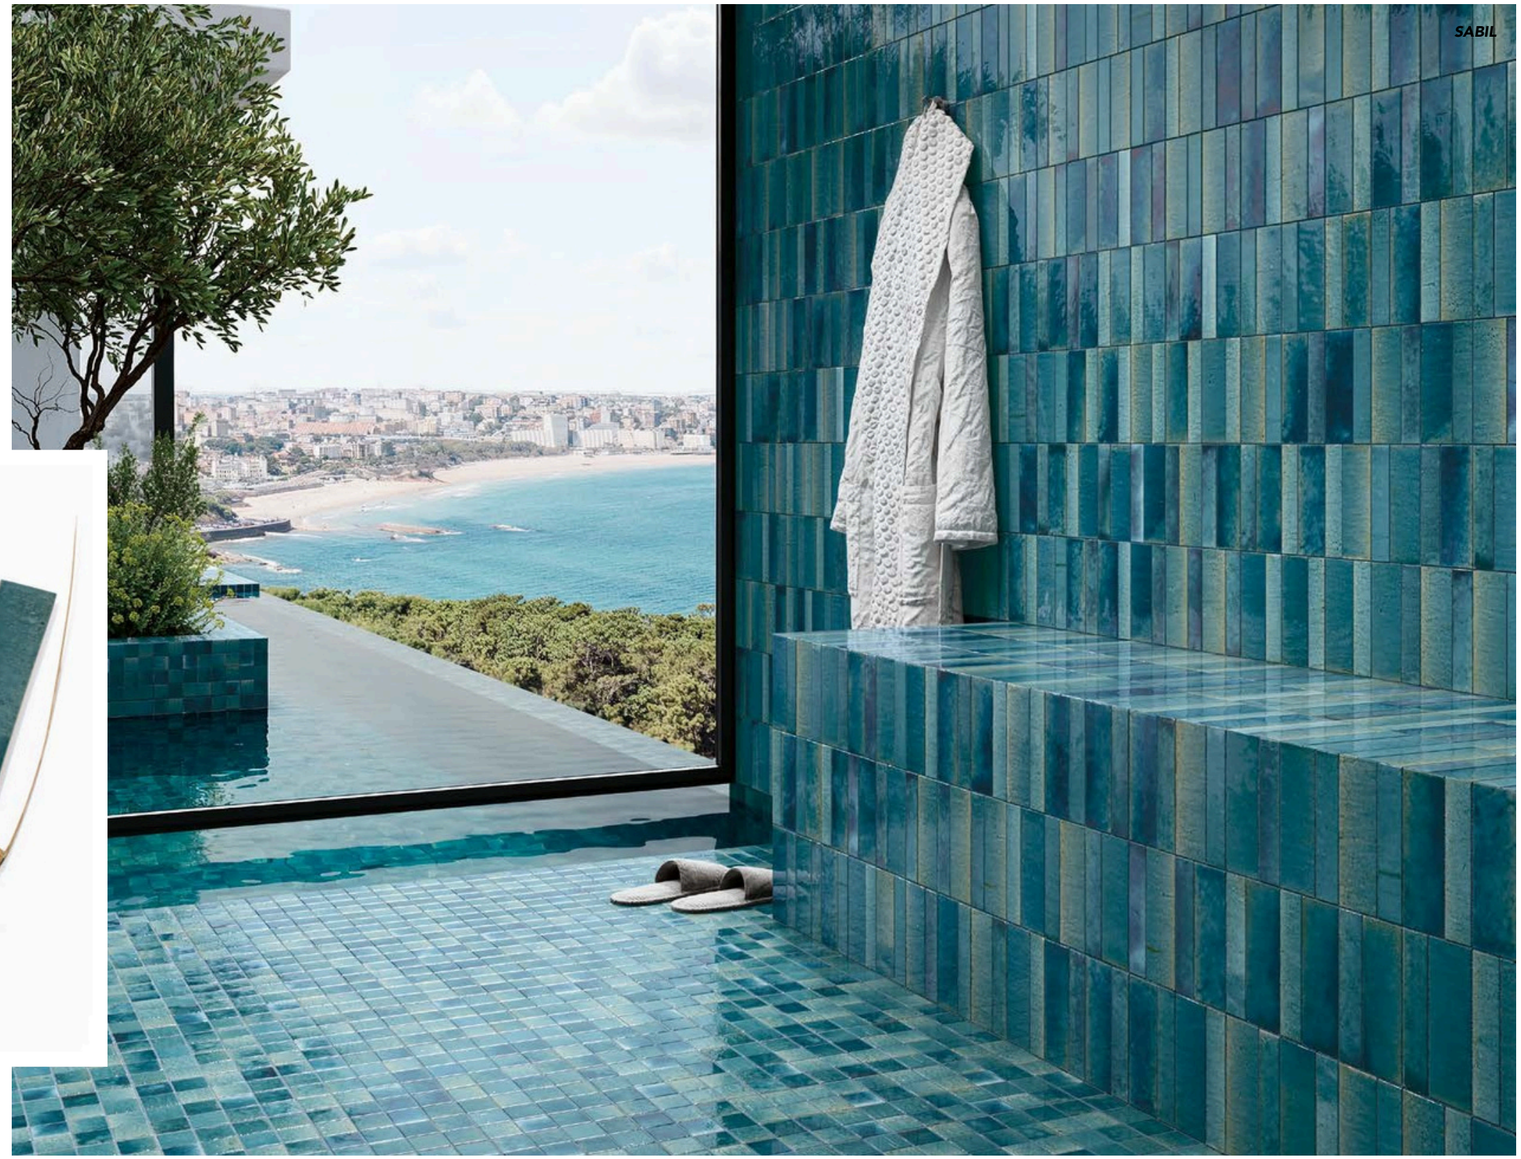



Sabil Fit **Viridian 36% &** *Sabil* **Viridian 64%**

Pool: *Sabil Pixel* **Viridian**



SABIL
Flour

Grout Colour: **Fugabella KK107**
Laticrete 90



SABIL
Vanilla


Grout Colour: **Fugabella KK79**
Laticrete 17

*** The colors shown are for guidance only, and ceramic shades may vary between production batches. References are approximate and do not exactly match the final color. We recommend requesting physical samples.**
The suggested grout colors are aesthetic recommendations and may be adjusted according to customer preference.
The company is not responsible for any differences between printed or digital colors and the final product.




SABIL
Cloud

Grout Colour: **Fugabella KK6**
Laticrete 78




SABIL
Viridian

Grout Colour: **Fugabella KK50**
Laticrete 24



SABIL
Ultramarine

Grout Colour: **Fugabella KK8**
Fugabella KK29
Laticrete 53



SABIL
Jungle

Grout Colour: **Fugabella KK68**
Laticrete 33

*** Los colores mostrados son orientativos, y la tonalidad de la cerámica puede variar entre lotes de producción. Las referencias son aproximadas y no equivalen con exactitud al color real, recomendamos solicitar muestras físicas.**
Los colores de junta indicados son sugerencias estéticas y quedan sujetos al criterio del consumidor.
La empresa no se responsabiliza por diferencias entre los colores impresos o digitales y el producto final.

Porcelain tiles whith water absorption B Ia ≤ 0,5% for interior and exterior floors and walls.
Baldosas cerámicas prensadas en seco con absorción de agua B Ia ≤ 0,5% para suelos y paredes interiores y exteriores.


FEATURES / C AR AC TERÍS TIC A S	*SPECIFICATION / ESPECIFICACIÓN*	*NORMA*
Dimensional Features	**Sabil: 48 mm +/- 0,5 mm x 148 mm +/- 0,9 mm x 8,5 mm+/- 0,5 mm Sabil Fit: 28 mm +/- 0,5 mm x 148 mm +/- 0,9 mm x 8,5 mm+/- 0,5 mm Sabil Pixel: 148 mm +/- 0,9 mm x 148 mm +/- 0,9 mm x 8,5 mm+/- 0,5 mm**	**UNE-EN ISO 10545-2:2019**
Water absorption	**E_b ≤ 0,5%**	**UNE-EN ISO 10545-3:2018**
Modulus of rupture	**Minimum 35 N/mm² Individual Minimum 32 N/mm²**	**UNE-EN ISO 10545-4:2019**
Abrasive resistance	**PEI 4 : Flour PEI 3: Vanilla, Viridian & Cloud PEI 2: Jungle & Ultramarine**	**UNE-EN ISO 10545-7:1999**
Crazing resistance	**Pass**	**UNE-EN ISO 10545-11:1997**
Frost resistance	**Pass**	**UNE-EN ISO 10545-11:1997**
Household products resistance	**GA**	**UNE-EN ISO 10545-13:2017**
Chemical resistance	**GHA**	**UNE-EN ISO 10545-13:2017**
Stain resistance	**5**	**UNE-EN ISO 10545-14:2015**
Non-slip value	**CLASS 0 DCOF <0,42**	**UNE-EN 16165:2022 ANSI A137.1:2012**
Tone variation	**V3: Flour & Vanilla V4: Viridian, Cloud & Ultramarine V5: Jungle**	**-**
Porcelain body	**-**	**-**

Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
SABIL FIT	2,8x15 cm	96	7,91 kg	0,398 m²	128	50,94 m²
SABIL	5x15 cm	75	10,10 kg	0,533 m²	100	53,30 m²
SABIL PIXEL	15x15 cm	25	10,67 kg	0,563 m²	75	42,225 m²
SABIL ROUNDED EDGE	1,1x15 cm	20	0,43 kg	2,95 ml	429	885 ml


Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
SABIL FIT	1.2"x6"	96	17.439 lb	4.284 ft²	128	548.352 ft²
SABIL	2"x6"	75	22.267 lb	5.737 ft²	100	573.800 ft²
SABIL PIXEL	6"x6"	25	23.523 lb	6.060 ft²	75	454.505 ft²
SABIL ROUNDED EDGE	0.43"x6"	20	0.947 lb	9.678 l ft	429	4152.862 l ft

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
SABIL FIT	W27
SABIL	W25
SABIL PIXEL	W18
SABIL ROUNDED EDGE	W33


SABIL FIT

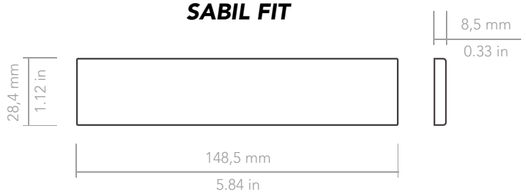


SABIL

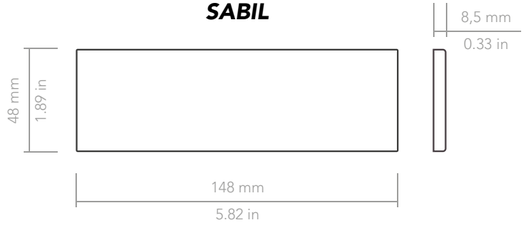

SABIL PIXEL

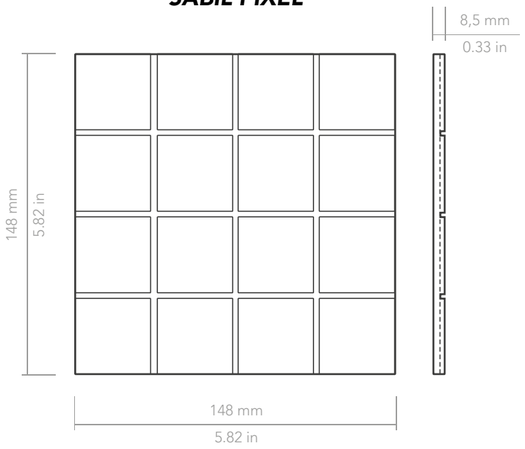

SABIL ROUNDED EDGE



WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

Toensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints
is not advisable from any technical point of view as this may lead to various problems. For an optimal result we advise to use 1,5 mm (0.06") spacers.

GROUTING

The choice ofquality grouting mortar is crucial.
We recommend:
- Kerakoll Color Fill - Fugabella (www.kerakoll.com)
- Litokol StyleGrout (www.litokol.it)
- Laticrete Spectralock Pro Premium (www.laticrete.com)

MAINTENANCE AND CLEANING

Once thematerialshave been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Paragarantizar lascaracterísticas de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Paragarantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación
sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Para un resultado óptimo es necesario usar 1,5 mm de junta.


REJUNTADO

Esimportante la elección de un material de rejunte de calidad. WOW recomienda utilizar:
- Kerakoll Color Fill - Fugabella (www.kerakoll.com)
- Litokol StyleGrout (www.litokol.it)
- Laticrete Spectralock Pro Premium (www.laticrete.com)

MANTENIMIENTO Y LIMPIEZA

Finalizada la puestaen obra serecomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

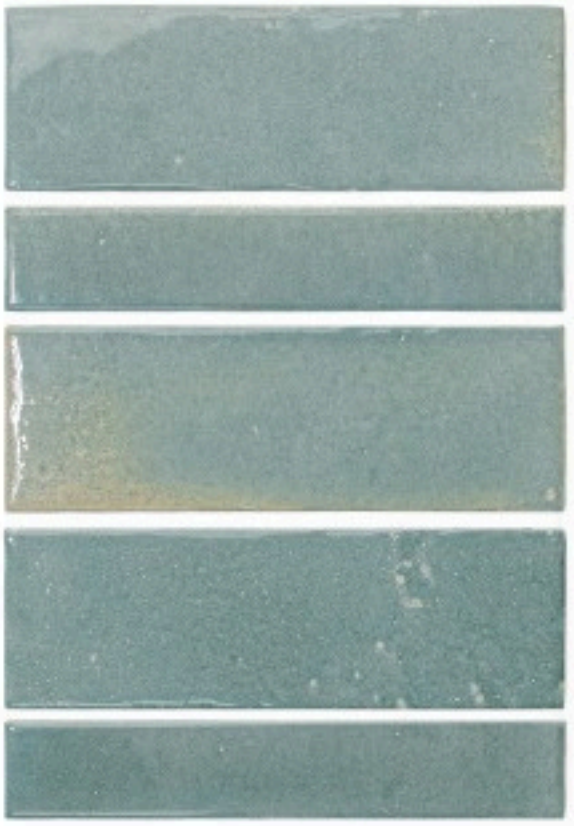

EST 1967

FACINGS

OF AMERICA